



**debian**

# **Debian Reference**

Osamu Aoki

Copyright © 2013-2024 Osamu Aoki

This Debian Reference (version 2.140) (2026-06-25 05:00:57 UTC) is intended to provide a broad overview of the Debian system as a post-installation user's guide. It covers many aspects of system administration through shell-command examples for non-developers.

# Contents

|          |   |          |
|----------|---|----------|
| <b>1</b> | <b>GNU/Linux tutorials</b>                            | <b>1</b> |
| 1.1      | Console basics  | 1        |
| 1.1.1    | The shell prompt                                      | 1        |
| 1.1.2    | The shell prompt under GUI                            | 2        |
| 1.1.3    | The root account                                      | 2        |
| 1.1.4    | The root shell prompt                                 | 3        |
| 1.1.5    | GUI system administration tools                       | 3        |
| 1.1.6    | Virtual consoles                                      | 3        |
| 1.1.7    | How to leave the command prompt                       | 3        |
| 1.1.8    | How to shutdown the system                            | 4        |
| 1.1.9    | Recovering a sane console                             | 4        |
| 1.1.10   | Additional package suggestions for the newbie         | 4        |
| 1.1.11   | An extra user account                                 | 5        |
| 1.1.12   | sudo configuration                                    | 5        |
| 1.1.13   | Play time   | 6        |
| 1.2      | Unix-like filesystem                                  | 6        |
| 1.2.1    | Unix file basics                                      | 6        |
| 1.2.2    | Filesystem internals                                  | 8        |
| 1.2.3    | Filesystem permissions                                | 8        |
| 1.2.4    | Control of permissions for newly created files: umask | 10       |
| 1.2.5    | Permissions for groups of users (group)               | 11       |
| 1.2.6    | Timestamps  | 12       |
| 1.2.7    | Links   | 13       |
| 1.2.8    | Named pipes (FIFOs)                                   | 14       |
| 1.2.9    | Sockets   | 15       |
| 1.2.10   | Device files  | 15       |
| 1.2.11   | Special device files                                  | 16       |
| 1.2.12   | procfs and sysfs                                      | 16       |
| 1.2.13   | tmpfs   | 17       |
| 1.3      | Midnight Commander (MC)                               | 17       |

---

|        |   |    |
|--------|---|----|
| 1.3.1  | Customization of MC                             | 17 |
| 1.3.2  | Starting MC                                     | 18 |
| 1.3.3  | File manager in MC                              | 18 |
| 1.3.4  | Command-line tricks in MC                       | 18 |
| 1.3.5  | The internal editor in MC                       | 19 |
| 1.3.6  | The internal viewer in MC                       | 19 |
| 1.3.7  | Auto-start features of MC                       | 19 |
| 1.3.8  | Virtual filesystem of MC                        | 20 |
| 1.4    | The basic Unix-like work environment            | 20 |
| 1.4.1  | The login shell                                 | 20 |
| 1.4.2  | Customizing bash                                | 21 |
| 1.4.3  | Special key strokes                             | 21 |
| 1.4.4  | Mouse operations                                | 21 |
| 1.4.5  | The pager                                       | 22 |
| 1.4.6  | The text editor                                 | 23 |
| 1.4.7  | Setting a default text editor                   | 23 |
| 1.4.8  | Using vim                                       | 23 |
| 1.4.9  | Recording the shell activities                  | 24 |
| 1.4.10 | Basic Unix commands                             | 25 |
| 1.5    | The simple shell command                        | 25 |
| 1.5.1  | Command execution and environment variable      | 27 |
| 1.5.2  | The "\$LANG" variable                           | 27 |
| 1.5.3  | The "\$PATH" variable                           | 28 |
| 1.5.4  | The "\$HOME" variable                           | 28 |
| 1.5.5  | Command line options                            | 29 |
| 1.5.6  | Shell glob                                      | 29 |
| 1.5.7  | Return value of the command                     | 30 |
| 1.5.8  | Typical command sequences and shell redirection | 30 |
| 1.5.9  | Command alias                                   | 32 |
| 1.6    | Unix-like text processing                       | 32 |
| 1.6.1  | Unix text tools                                 | 32 |
| 1.6.2  | Regular expressions                             | 33 |
| 1.6.3  | Replacement expressions                         | 34 |
| 1.6.4  | Global substitution with regular expressions    | 35 |
| 1.6.5  | Extracting data from text file table            | 36 |
| 1.6.6  | Script snippets for piping commands             | 37 |

---

|          |  |           |
|----------|--|-----------|
| <b>2</b> | <b>Debian package management</b>                         | <b>38</b> |
| 2.1      | Debian package management prerequisites                  | 38        |
| 2.1.1    | Debian package management system                         | 38        |
| 2.1.2    | Package configuration                                    | 38        |
| 2.1.3    | Basic precautions  | 39        |
| 2.1.4    | Life with eternal upgrades                               | 40        |
| 2.1.5    | Debian archive basics                                    | 41        |
| 2.1.6    | Debian is 100% free software                             | 44        |
| 2.1.7    | Package dependencies                                     | 46        |
| 2.1.8    | The event flow of the package management                 | 47        |
| 2.1.9    | First response to package management troubles            | 48        |
| 2.1.10   | How to pick Debian packages                              | 48        |
| 2.1.11   | How to cope with conflicting requirements                | 49        |
| 2.2      | Basic package management operations                      | 49        |
| 2.2.1    | apt vs. apt-get / apt-cache vs. aptitude                 | 49        |
| 2.2.2    | Basic package management operations with the commandline | 50        |
| 2.2.3    | Interactive use of aptitude                              | 52        |
| 2.2.4    | Key bindings of aptitude                                 | 52        |
| 2.2.5    | Package views under aptitude                             | 53        |
| 2.2.6    | Search method options with aptitude                      | 54        |
| 2.2.7    | The aptitude regex formula                               | 54        |
| 2.2.8    | Dependency resolution of aptitude                        | 56        |
| 2.2.9    | Package activity logs                                    | 56        |
| 2.3      | Examples of aptitude operations                          | 56        |
| 2.3.1    | Seeking interesting packages                             | 56        |
| 2.3.2    | Listing packages with regex matching on package names    | 57        |
| 2.3.3    | Browsing with the regex matching                         | 57        |
| 2.3.4    | Purging removed packages for good                        | 57        |
| 2.3.5    | Tidying auto/manual install status                       | 57        |
| 2.3.6    | System wide upgrade                                      | 58        |
| 2.4      | Advanced package management operations                   | 59        |
| 2.4.1    | Advanced package management operations with commandline  | 59        |
| 2.4.2    | Verification of installed package files                  | 61        |
| 2.4.3    | Safeguarding for package problems                        | 61        |
| 2.4.4    | Searching on the package meta data                       | 61        |
| 2.5      | Debian package management internals                      | 61        |
| 2.5.1    | Archive meta data  | 62        |
| 2.5.2    | Top level "Release" file and authenticity                | 62        |
| 2.5.3    | Archive level "Release" files                            | 63        |

---

|        |   |    |
|--------|---|----|
| 2.5.4  | Fetching of the meta data for the package                         | 64 |
| 2.5.5  | The package state for APT   | 64 |
| 2.5.6  | The package state for aptitude                                    | 64 |
| 2.5.7  | Local copies of the fetched packages                              | 65 |
| 2.5.8  | Debian package file names   | 65 |
| 2.5.9  | The dpkg command  | 66 |
| 2.5.10 | The update-alternatives command                                   | 66 |
| 2.5.11 | The dpkg-statoverride command                                     | 67 |
| 2.5.12 | The dpkg-divert command   | 67 |
| 2.6    | Recovery from a broken system                                     | 67 |
| 2.6.1  | Incompatibility with old user configuration                       | 68 |
| 2.6.2  | Caching errors of the package data                                | 68 |
| 2.6.3  | Rescue with the dpkg command                                      | 68 |
| 2.6.4  | Failed installation due to missing dependencies                   | 68 |
| 2.6.5  | Different packages with overlapped files                          | 69 |
| 2.6.6  | Fixing broken package script                                      | 69 |
| 2.6.7  | Recovering package selection data                                 | 69 |
| 2.7    | Tips for the package management                                   | 70 |
| 2.7.1  | Who uploaded the package?   | 70 |
| 2.7.2  | Limiting download bandwidth for APT                               | 70 |
| 2.7.3  | Automatic download and upgrade of packages                        | 70 |
| 2.7.4  | Updates and Backports   | 71 |
| 2.7.5  | External package archives   | 71 |
| 2.7.6  | Packages from mixed source of archives without <b>apt-pinning</b> | 71 |
| 2.7.7  | Tweaking candidate version with <b>apt-pinning</b>                | 72 |
| 2.7.8  | Blocking packages installed by "Recommends"                       | 74 |
| 2.7.9  | Tracking testing with some packages from unstable                 | 74 |
| 2.7.10 | Tracking unstable with some packages from experimental            | 76 |
| 2.7.11 | Emergency downgrading   | 76 |
| 2.7.12 | The equivs package  | 77 |
| 2.7.13 | Porting a package to the stable system                            | 77 |
| 2.7.14 | Proxy server for APT  | 78 |
| 2.7.15 | More readings for the package management                          | 78 |

---

|          |   |           |
|----------|---|-----------|
| <b>3</b> | <b>The system initialization</b>              | <b>79</b> |
| 3.1      | An overview of the boot strap process         | 79        |
| 3.1.1    | Stage 1: the UEFI                             | 79        |
| 3.1.2    | Stage 2: the boot loader                      | 80        |
| 3.1.3    | Stage 3: the mini-Debian system               | 81        |
| 3.1.4    | Stage 4: the normal Debian system             | 82        |
| 3.2      | Rescue system                                 | 82        |
| 3.2.1    | GRUB UEFI rescue system on USB                | 83        |
| 3.2.2    | Linux live rescue system on USB               | 84        |
| 3.2.3    | Linux live rescue system from GRUB            | 85        |
| 3.3      | Systemd                                       | 85        |
| 3.3.1    | Systemd init                                  | 85        |
| 3.3.2    | Systemd login                                 | 86        |
| 3.4      | The kernel message                            | 86        |
| 3.5      | The system message                            | 87        |
| 3.6      | System management                             | 87        |
| 3.7      | Other system monitors                         | 89        |
| 3.8      | System configuration                          | 89        |
| 3.8.1    | The hostname                                  | 89        |
| 3.8.2    | The filesystem                                | 89        |
| 3.8.3    | Network interface initialization              | 89        |
| 3.8.4    | Cloud system initialization                   | 90        |
| 3.8.5    | Customization example to tweak sshd service   | 90        |
| 3.9      | The udev system                               | 90        |
| 3.10     | The kernel module initialization              | 91        |
| <b>4</b> | <b>Authentication and access controls</b>     | <b>92</b> |
| 4.1      | Normal Unix authentication                    | 92        |
| 4.2      | Managing account and password information     | 94        |
| 4.3      | Good password                                 | 94        |
| 4.4      | Creating encrypted password                   | 95        |
| 4.5      | PAM and NSS                                   | 95        |
| 4.5.1    | Configuration files accessed by PAM and NSS   | 96        |
| 4.5.2    | The modern centralized system management      | 96        |
| 4.5.3    | "Why GNU su does not support the wheel group" | 97        |
| 4.5.4    | Stricter password rule                        | 97        |
| 4.6      | Security of authentication                    | 98        |
| 4.6.1    | Secure password on the Internet               | 98        |
| 4.6.2    | Secure Shell                                  | 98        |

---



|          |   |            |
|----------|---|------------|
| 4.6.3    | Extra security measures for the Internet                        | 98         |
| 4.6.4    | Securing the root password                                      | 99         |
| 4.7      | Other access controls   | 99         |
| 4.7.1    | Access control lists (ACLs)                                     | 100        |
| 4.7.2    | sudo  | 100        |
| 4.7.3    | PolicyKit   | 100        |
| 4.7.4    | Restricting access to some server services                      | 101        |
| 4.7.5    | Linux security features   | 101        |
| <b>5</b> | <b>Network setup</b>  | <b>103</b> |
| 5.1      | The basic network infrastructure                                | 103        |
| 5.1.1    | The hostname resolution   | 103        |
| 5.1.2    | The network interface name                                      | 105        |
| 5.1.3    | The network address range for the LAN                           | 106        |
| 5.1.4    | The network device support                                      | 106        |
| 5.2      | The modern network configuration for desktop                    | 106        |
| 5.2.1    | GUI network configuration tools                                 | 107        |
| 5.3      | The modern network configuration without GUI                    | 107        |
| 5.4      | The modern network configuration for cloud                      | 108        |
| 5.4.1    | The modern network configuration for cloud with DHCP            | 108        |
| 5.4.2    | The modern network configuration for cloud with static IP       | 108        |
| 5.4.3    | The modern network configuration for cloud with Network Manager | 108        |
| 5.5      | The low level network configuration                             | 109        |
| 5.5.1    | Iproute2 commands   | 109        |
| 5.5.2    | Safe low level network operations                               | 109        |
| 5.6      | Network optimization  | 110        |
| 5.6.1    | Finding optimal MTU   | 110        |
| 5.6.2    | WAN TCP optimization  | 111        |
| 5.7      | Netfilter infrastructure  | 111        |
| <b>6</b> | <b>Network applications</b>                                     | <b>113</b> |
| 6.1      | Web browsers  | 113        |
| 6.1.1    | Spoofing the User-Agent string                                  | 114        |
| 6.1.2    | Browser extension   | 114        |
| 6.2      | The mail system   | 114        |
| 6.2.1    | Email basics  | 114        |
| 6.2.2    | Modern mail service limitation                                  | 115        |
| 6.2.3    | Historic mail service expectation                               | 115        |
| 6.2.4    | Mail transport agent (MTA)                                      | 116        |

---

|          |  |            |
|----------|--|------------|
| 6.2.4.1  | The configuration of <code>exim4</code>      | 116        |
| 6.2.4.2  | The configuration of postfix with SASL       | 118        |
| 6.2.4.3  | The mail address configuration               | 119        |
| 6.2.4.4  | Basic MTA operations                         | 120        |
| 6.3      | The remote access server and utilities (SSH) | 120        |
| 6.3.1    | Basics of SSH                                | 121        |
| 6.3.2    | User name on the remote host                 | 122        |
| 6.3.3    | Connecting without remote passwords          | 122        |
| 6.3.4    | Dealing with alien SSH clients               | 122        |
| 6.3.5    | Setting up <code>ssh-agent</code>            | 122        |
| 6.3.6    | Sending a mail from a remote host            | 123        |
| 6.3.7    | Port forwarding for SMTP/POP3 tunneling      | 123        |
| 6.3.8    | How to shutdown the remote system on SSH     | 123        |
| 6.3.9    | Troubleshooting SSH                          | 123        |
| 6.4      | The print server and utilities               | 123        |
| 6.5      | Other network application servers            | 124        |
| 6.6      | Other network application clients            | 125        |
| 6.7      | The diagnosis of the system daemons          | 125        |
| <b>7</b> | <b>GUI System</b>                            | <b>127</b> |
| 7.1      | GUI desktop environment                      | 127        |
| 7.2      | GUI communication protocol                   | 128        |
| 7.3      | GUI infrastructure                           | 129        |
| 7.4      | GUI applications                             | 129        |
| 7.5      | User directories                             | 131        |
| 7.6      | Fonts  | 131        |
| 7.6.1    | Basic fonts                                  | 131        |
| 7.6.2    | Font rasterization                           | 133        |
| 7.7      | Sandbox                                      | 133        |
| 7.8      | Remote desktop                               | 134        |
| 7.9      | X server connection                          | 134        |
| 7.9.1    | X server local connection                    | 134        |
| 7.9.2    | X server remote connection                   | 134        |
| 7.9.3    | X server chroot connection                   | 136        |
| 7.10     | Clipboard                                    | 136        |

---

|          |  |            |
|----------|--|------------|
| <b>8</b> | <b>I18N and L10N</b>   | <b>137</b> |
| 8.1      | The locale . . . . .   | 137        |
| 8.1.1    | Rationale for UTF-8 locale . . . . .                               | 137        |
| 8.1.2    | The reconfiguration of the locale . . . . .                        | 138        |
| 8.1.3    | Filename encoding . . . . .  | 139        |
| 8.1.4    | Localized messages and translated documentation . . . . .          | 139        |
| 8.1.5    | Effects of the locale . . . . .                                    | 139        |
| 8.2      | The keyboard input . . . . .                                       | 140        |
| 8.2.1    | The keyboard input for Linux console and X Window . . . . .        | 140        |
| 8.2.2    | The keyboard input for Wayland . . . . .                           | 141        |
| 8.2.3    | The input method support with IBus . . . . .                       | 141        |
| 8.2.4    | The input method support with Fcitx . . . . .                      | 141        |
| 8.2.5    | An example for Japanese . . . . .                                  | 141        |
| 8.3      | The display output . . . . .                                       | 144        |
| 8.3.1    | The terminal configuration . . . . .                               | 144        |
| 8.3.2    | East Asian Ambiguous Character Width Characters . . . . .          | 145        |
| <b>9</b> | <b>System tips</b>   | <b>146</b> |
| 9.1      | The console tips . . . . .   | 146        |
| 9.1.1    | Recording the shell activities cleanly . . . . .                   | 146        |
| 9.1.2    | The screen program . . . . .                                       | 147        |
| 9.1.3    | Navigating around directories . . . . .                            | 148        |
| 9.1.4    | Readline wrapper . . . . .   | 148        |
| 9.1.5    | Scanning the source code tree . . . . .                            | 148        |
| 9.2      | Customizing vim . . . . .  | 149        |
| 9.2.1    | Customizing vim with internal features . . . . .                   | 149        |
| 9.2.2    | Customizing vim with external packages . . . . .                   | 151        |
| 9.3      | Data recording and presentation . . . . .                          | 152        |
| 9.3.1    | The log daemon . . . . .   | 152        |
| 9.3.2    | Log analyzer . . . . .   | 152        |
| 9.3.3    | Customized display of text data . . . . .                          | 153        |
| 9.3.4    | Customized display of time and date . . . . .                      | 153        |
| 9.3.5    | Colorized shell echo . . . . .                                     | 153        |
| 9.3.6    | Colorized commands . . . . .                                       | 154        |
| 9.3.7    | Recording the editor activities for complex repeats . . . . .      | 154        |
| 9.3.8    | Recording the graphics image of an X application . . . . .         | 155        |
| 9.3.9    | Recording changes in configuration files . . . . .                 | 155        |
| 9.4      | Monitoring, controlling, and starting program activities . . . . . | 157        |
| 9.4.1    | Timing a process . . . . .   | 157        |

---

|        |  |     |
|--------|--|-----|
| 9.4.2  | The scheduling priority . . . . .                            | 157 |
| 9.4.3  | The ps command . . . . .                                     | 157 |
| 9.4.4  | The top command . . . . .                                    | 158 |
| 9.4.5  | Listing files opened by a process . . . . .                  | 158 |
| 9.4.6  | Tracing program activities . . . . .                         | 158 |
| 9.4.7  | Identification of processes using files or sockets . . . . . | 158 |
| 9.4.8  | Repeating a command with a constant interval . . . . .       | 158 |
| 9.4.9  | Repeating a command looping over files . . . . .             | 159 |
| 9.4.10 | Starting a program from GUI . . . . .                        | 159 |
| 9.4.11 | Customizing program to be started . . . . .                  | 160 |
| 9.4.12 | Killing a process . . . . .                                  | 161 |
| 9.4.13 | Scheduling tasks once . . . . .                              | 161 |
| 9.4.14 | Scheduling tasks regularly . . . . .                         | 161 |
| 9.4.15 | Scheduling tasks on event . . . . .                          | 163 |
| 9.4.16 | Alt-SysRq key . . . . .                                      | 163 |
| 9.5    | System maintenance tips . . . . .                            | 164 |
| 9.5.1  | Who is on the system? . . . . .                              | 164 |
| 9.5.2  | Warning everyone . . . . .                                   | 164 |
| 9.5.3  | Hardware identification . . . . .                            | 164 |
| 9.5.4  | Hardware configuration . . . . .                             | 165 |
| 9.5.5  | System and hardware time . . . . .                           | 165 |
| 9.5.6  | The sound infrastructure . . . . .                           | 166 |
| 9.5.7  | Disabling the screen saver . . . . .                         | 168 |
| 9.5.8  | Disabling beep sounds . . . . .                              | 168 |
| 9.5.9  | Memory usage . . . . .                                       | 168 |
| 9.5.10 | System security and integrity check . . . . .                | 168 |
| 9.6    | Data storage tips . . . . .                                  | 169 |
| 9.6.1  | Disk space usage . . . . .                                   | 169 |
| 9.6.2  | Disk partition configuration . . . . .                       | 170 |
| 9.6.3  | Accessing partition using UUID . . . . .                     | 170 |
| 9.6.4  | LVM2 . . . . .   | 171 |
| 9.6.5  | Filesystem configuration . . . . .                           | 171 |
| 9.6.6  | Filesystem creation and integrity check . . . . .            | 172 |
| 9.6.7  | Optimization of filesystem by mount options . . . . .        | 172 |
| 9.6.8  | Optimization of filesystem via superbblock . . . . .         | 173 |
| 9.6.9  | Optimization of hard disk . . . . .                          | 173 |
| 9.6.10 | Optimization of solid state drive . . . . .                  | 173 |
| 9.6.11 | Using SMART to predict hard disk failure . . . . .           | 173 |
| 9.6.12 | Specify temporary storage directory via \$TMPDIR . . . . .   | 174 |

---

|        |   |     |
|--------|---|-----|
| 9.6.13 | Expansion of usable storage space via LVM                               | 174 |
| 9.6.14 | Expansion of usable storage space by mounting another partition         | 174 |
| 9.6.15 | Expansion of usable storage space by bind-mounting another directory    | 174 |
| 9.6.16 | Expansion of usable storage space by overlay-mounting another directory | 175 |
| 9.6.17 | Expansion of usable storage space using symlink                         | 175 |
| 9.7    | The disk image  | 175 |
| 9.7.1  | Making the disk image file  | 175 |
| 9.7.2  | Writing directly to the disk  | 176 |
| 9.7.3  | Mounting the disk image file  | 176 |
| 9.7.4  | Cleaning a disk image file  | 178 |
| 9.7.5  | Making the empty disk image file  | 178 |
| 9.7.6  | Making the ISO9660 image file   | 179 |
| 9.7.7  | Writing directly to the CD/DVD-R/RW                                     | 179 |
| 9.7.8  | Mounting the ISO9660 image file   | 180 |
| 9.8    | The binary data   | 180 |
| 9.8.1  | Viewing and editing binary data   | 180 |
| 9.8.2  | Manipulating files without mounting disk                                | 181 |
| 9.8.3  | Data redundancy   | 181 |
| 9.8.4  | Data file recovery and forensic analysis                                | 181 |
| 9.8.5  | Splitting a large file into small files                                 | 182 |
| 9.8.6  | Clearing file contents  | 182 |
| 9.8.7  | Dummy files   | 182 |
| 9.8.8  | Erasing an entire hard disk   | 182 |
| 9.8.9  | Erasing unused area of an hard disk                                     | 183 |
| 9.8.10 | Undeleting deleted but still open files                                 | 183 |
| 9.8.11 | Searching all hardlinks   | 184 |
| 9.8.12 | Invisible disk space consumption  | 184 |
| 9.9    | Data encryption tips  | 184 |
| 9.9.1  | Removable disk encryption with dm-crypt/LUKS                            | 185 |
| 9.9.2  | Mounting encrypted disk with dm-crypt/LUKS                              | 185 |
| 9.10   | The kernel  | 186 |
| 9.10.1 | Kernel parameters   | 186 |
| 9.10.2 | Kernel headers  | 186 |
| 9.10.3 | Compiling the kernel and related modules                                | 186 |
| 9.10.4 | Compiling the kernel source: Debian Kernel Team recommendation          | 187 |
| 9.10.5 | Hardware drivers and firmware   | 188 |
| 9.11   | Virtualized system  | 189 |
| 9.11.1 | Virtualization and emulation tools                                      | 189 |
| 9.11.2 | Virtualization work flow  | 189 |
| 9.11.3 | Mounting the virtual disk image file                                    | 191 |
| 9.11.4 | Chroot system   | 191 |
| 9.11.5 | Multiple desktop systems  | 192 |

---

|  |            |
|--|------------|
| <b>10 Data management</b>                      | <b>194</b> |
| 10.1 Sharing, copying, and archiving           | 194        |
| 10.1.1 Archive and compression tools           | 195        |
| 10.1.2 Copy and synchronization tools          | 195        |
| 10.1.3 Idioms for the archive                  | 195        |
| 10.1.4 Idioms for the copy                     | 197        |
| 10.1.5 Idioms for the selection of files       | 198        |
| 10.1.6 Archive media                           | 199        |
| 10.1.7 Removable storage device                | 200        |
| 10.1.8 Filesystem choice for sharing data      | 201        |
| 10.1.9 Sharing data via network                | 202        |
| 10.2 Backup and recovery                       | 203        |
| 10.2.1 Backup and recovery policy              | 203        |
| 10.2.2 Backup utility suites                   | 204        |
| 10.2.3 Backup tips                             | 204        |
| 10.2.3.1 GUI backup                            | 206        |
| 10.2.3.2 Mount event triggered backup          | 206        |
| 10.2.3.3 Timer event triggered backup          | 207        |
| 10.3 Data security infrastructure              | 208        |
| 10.3.1 Key management for GnuPG                | 208        |
| 10.3.2 Using GnuPG on files                    | 210        |
| 10.3.3 Using GnuPG with Mutt                   | 210        |
| 10.3.4 Using GnuPG with Vim                    | 210        |
| 10.3.5 The MD5 sum                             | 212        |
| 10.3.6 Password keyring                        | 212        |
| 10.4 Source code merge tools                   | 212        |
| 10.4.1 Extracting differences for source files | 212        |
| 10.4.2 Merging updates for source files        | 214        |
| 10.4.3 Interactive merge                       | 214        |
| 10.5 Git                                       | 214        |
| 10.5.1 Configuration of Git client             | 215        |
| 10.5.2 Basic Git commands                      | 215        |
| 10.5.3 Git tips                                | 216        |
| 10.5.4 Git references                          | 216        |
| 10.5.5 Other version control systems           | 218        |

---

|  |            |
|--|------------|
| <b>11 Data conversion</b>                          | <b>219</b> |
| 11.1 Text data conversion tools                    | 219        |
| 11.1.1 Converting a text file with iconv           | 219        |
| 11.1.2 Checking file to be UTF-8 with iconv        | 221        |
| 11.1.3 Converting file names with iconv            | 221        |
| 11.1.4 EOL conversion                              | 221        |
| 11.1.5 TAB conversion                              | 222        |
| 11.1.6 Editors with auto-conversion                | 222        |
| 11.1.7 Plain text extraction                       | 223        |
| 11.1.8 Highlighting and formatting plain text data | 223        |
| 11.2 XML data                                      | 223        |
| 11.2.1 Basic hints for XML                         | 224        |
| 11.2.2 XML processing                              | 225        |
| 11.2.3 The XML data extraction                     | 225        |
| 11.2.4 The XML data lint                           | 227        |
| 11.3 Type setting                                  | 227        |
| 11.3.1 roff typesetting                            | 227        |
| 11.3.2 TeX/LaTeX                                   | 228        |
| 11.3.3 Pretty print a manual page                  | 228        |
| 11.3.4 Creating a manual page                      | 228        |
| 11.4 Printable data                                | 229        |
| 11.4.1 Ghostscript                                 | 229        |
| 11.4.2 Merge two PS or PDF files                   | 229        |
| 11.4.3 Printable data utilities                    | 230        |
| 11.4.4 Printing with CUPS                          | 230        |
| 11.5 The mail data conversion                      | 231        |
| 11.5.1 Mail data basics                            | 231        |
| 11.6 Graphic data tools                            | 232        |
| 11.6.1 Graphic data tools (metapackage)            | 232        |
| 11.6.2 Graphic data tools (GUI)                    | 232        |
| 11.6.3 Graphic data tools (CLI)                    | 232        |
| 11.7 Miscellaneous data conversion                 | 235        |
| <b>12 Programming</b>                              | <b>236</b> |
| 12.1 The shell script                              | 236        |
| 12.1.1 POSIX shell compatibility                   | 237        |
| 12.1.2 Shell parameters                            | 237        |
| 12.1.3 Shell conditionals                          | 239        |
| 12.1.4 Shell loops                                 | 239        |

---

|   |            |
|---|------------|
| 12.1.5 Shell environment variables . . . . .                | 240        |
| 12.1.6 The shell command-line processing sequence . . . . . | 240        |
| 12.1.7 Utility programs for shell script . . . . .          | 241        |
| 12.2 Scripting in interpreted languages . . . . .           | 243        |
| 12.2.1 Debugging interpreted language codes . . . . .       | 243        |
| 12.2.2 GUI program with the shell script . . . . .          | 243        |
| 12.2.3 Custom actions for GUI filer . . . . .               | 244        |
| 12.2.4 Perl short script madness . . . . .                  | 244        |
| 12.3 Coding in compiled languages . . . . .                 | 245        |
| 12.3.1 C . . . . .  | 245        |
| 12.3.2 Simple C program (gcc) . . . . .                     | 246        |
| 12.3.3 Flex — a better Lex . . . . .                        | 246        |
| 12.3.4 Bison — a better Yacc . . . . .                      | 246        |
| 12.4 Static code analysis tools . . . . .                   | 248        |
| 12.5 Debug . . . . .  | 248        |
| 12.5.1 Basic gdb execution . . . . .                        | 248        |
| 12.5.2 Debugging the Debian package . . . . .               | 250        |
| 12.5.3 Obtaining backtrace . . . . .                        | 251        |
| 12.5.4 Advanced gdb commands . . . . .                      | 251        |
| 12.5.5 Check dependency on libraries . . . . .              | 252        |
| 12.5.6 Dynamic call tracing tools . . . . .                 | 252        |
| 12.5.7 Debugging X Errors . . . . .                         | 252        |
| 12.5.8 Memory leak detection tools . . . . .                | 252        |
| 12.5.9 Disassemble binary . . . . .                         | 252        |
| 12.6 Build tools . . . . .                                  | 253        |
| 12.6.1 Make . . . . .                                       | 253        |
| 12.6.2 Autotools . . . . .                                  | 254        |
| 12.6.2.1 Compile and install a program . . . . .            | 254        |
| 12.6.2.2 Uninstall program . . . . .                        | 254        |
| 12.6.3 Meson . . . . .                                      | 254        |
| 12.7 Web . . . . .  | 255        |
| 12.8 The source code translation . . . . .                  | 255        |
| 12.9 Making Debian package . . . . .                        | 256        |
| <b>A Appendix</b> . . . . .                                 | <b>257</b> |
| A.1 The Debian maze . . . . .                               | 257        |
| A.2 Copyright history . . . . .                             | 257        |
| A.3 Document format . . . . .                               | 258        |

---



# List of Tables

|  |    |
|--|----|
| 1.1 List of interesting text-mode program packages . . . . .                           | 4  |
| 1.2 List of informative documentation packages . . . . .                               | 5  |
| 1.3 List of usage of key directories . . . . .   | 7  |
| 1.4 List of the first character of "ls -l" output . . . . .                            | 9  |
| 1.5 The numeric mode for file permissions in chmod(1) commands . . . . .               | 10 |
| 1.6 The <b>umask</b> value examples . . . . .  | 11 |
| 1.7 List of notable system-provided groups for file access . . . . .                   | 12 |
| 1.8 List of notable system provided groups for particular command executions . . . . . | 12 |
| 1.9 List of types of timestamps . . . . .  | 12 |
| 1.10 List of special device files . . . . .  | 16 |
| 1.11 The key bindings of MC . . . . .  | 18 |
| 1.12 The reaction to the enter key in MC . . . . .                                     | 19 |
| 1.13 List of shell programs . . . . .  | 20 |
| 1.14 List of key bindings for bash . . . . .   | 22 |
| 1.15 List of mouse operations and related key actions on Debian . . . . .              | 22 |
| 1.16 List of basic Vim key strokes . . . . .   | 24 |
| 1.17 List of basic Unix commands . . . . .   | 26 |
| 1.18 The 3 parts of locale value . . . . .   | 27 |
| 1.19 List of locale recommendations . . . . .  | 28 |
| 1.20 List of "\$HOME" values . . . . .   | 29 |
| 1.21 Shell glob patterns . . . . .   | 29 |
| 1.22 Command exit codes . . . . .  | 30 |
| 1.23 Shell command idioms . . . . .  | 31 |
| 1.24 Predefined file descriptors . . . . .   | 31 |
| 1.25 Metacharacters for BRE and ERE . . . . .  | 34 |
| 1.26 The replacement expression . . . . .  | 34 |
| 1.27 List of script snippets for piping commands . . . . .                             | 37 |
| 2.1 List of Debian package management tools . . . . .                                  | 39 |
| 2.2 List of Debian archive sites . . . . .   | 42 |

|      |   |     |
|------|---|-----|
| 2.3  | List of Debian archive area   | 43  |
| 2.4  | The relationship between suite and codename   | 43  |
| 2.5  | List of key web site to resolving problems with a specific package  | 48  |
| 2.6  | Basic package management operations with the commandline using <code>apt(8)</code> , <code>aptitude(8)</code> and <code>apt-get(8)</code><br><code>/apt-cache(8)</code> | 51  |
| 2.7  | Notable command options for <code>aptitude(8)</code>  | 51  |
| 2.8  | List of key bindings for <code>aptitude</code>  | 52  |
| 2.9  | List of views for <code>aptitude</code>   | 53  |
| 2.10 | The categorization of standard package views  | 54  |
| 2.11 | List of the <code>aptitude</code> regex formula   | 55  |
| 2.12 | The log files for package activities  | 56  |
| 2.13 | List of advanced package management operations  | 60  |
| 2.14 | The content of the Debian archive meta data   | 62  |
| 2.15 | The name structure of Debian packages   | 65  |
| 2.16 | The usable characters for each component in the Debian package names  | 65  |
| 2.17 | The notable files created by <code>dpkg</code>  | 66  |
| 2.18 | List of notable Pin-Priority values for <b>apt-pinning</b> technique.   | 73  |
| 2.19 | List of the proxy tools specially for Debian archive  | 78  |
| 3.1  | List of boot loaders  | 80  |
| 3.2  | The meaning of the menu entry of the above part of <code>/boot/grub/grub.cfg</code>   | 81  |
| 3.3  | List of boot utilities for the Debian system  | 83  |
| 3.4  | List of kernel error levels   | 87  |
| 3.5  | List of typical <code>journalctl</code> command snippets  | 87  |
| 3.6  | List of typical <code>systemctl</code> command snippets   | 88  |
| 3.7  | List of other monitoring command snippets under <code>systemd</code>  | 89  |
| 4.1  | 3 important configuration files for <code>pam_unix(8)</code>  | 92  |
| 4.2  | The second entry content of <code>"/etc/passwd"</code>  | 93  |
| 4.3  | List of commands to manage account information  | 94  |
| 4.4  | List of tools to generate password  | 95  |
| 4.5  | List of notable PAM and NSS systems   | 95  |
| 4.6  | List of configuration files accessed by PAM and NSS   | 96  |
| 4.7  | List of insecure and secure services and ports  | 98  |
| 4.8  | List of tools to provide extra security measures  | 99  |
| 5.1  | List of network configuration tools   | 104 |
| 5.2  | List of network address ranges  | 106 |
| 5.3  | Translation table from obsolete <code>net-tools</code> commands to new <code>iproute2</code> commands   | 109 |
| 5.4  | List of low level network commands  | 109 |

---

|      |  |     |
|------|--|-----|
| 5.5  | List of network optimization tools   | 110 |
| 5.6  | Basic guide lines of the optimal MTU value   | 111 |
| 5.7  | List of firewall tools   | 112 |
| 6.1  | List of web browsers   | 113 |
| 6.2  | List of mail user agent (MUA)  | 115 |
| 6.3  | List of basic mail transport agent related packages  | 116 |
| 6.4  | List of important postfix manual pages   | 118 |
| 6.5  | List of mail address related configuration files   | 119 |
| 6.6  | List of basic MTA operation  | 120 |
| 6.7  | List of remote access server and utilities   | 120 |
| 6.8  | List of SSH configuration files  | 121 |
| 6.9  | List of SSH client startup examples  | 121 |
| 6.10 | List of free SSH clients for other platforms   | 122 |
| 6.11 | List of print servers and utilities  | 124 |
| 6.12 | List of other network application servers  | 124 |
| 6.13 | List of network application clients  | 125 |
| 6.14 | List of popular RFCs   | 126 |
| 7.1  | List of desktop environment  | 127 |
| 7.2  | List of notable GUI infrastructure packages  | 129 |
| 7.3  | List of notable GUI applications   | 130 |
| 7.4  | List of notable TrueType and OpenType fonts  | 132 |
| 7.5  | List of notable font environment and related packages                                      | 132 |
| 7.6  | List of notable sandbox environment and related packages                                   | 134 |
| 7.7  | List of notable remote access server   | 135 |
| 7.8  | List of connection methods to the X server   | 135 |
| 7.9  | List of programs related to manipulating character clipboard                               | 136 |
| 8.1  | List of IBus and its plugin packages   | 142 |
| 8.2  | List of Fcitx5 and its plugin packages   | 143 |
| 9.1  | List of programs to support console activities   | 146 |
| 9.2  | List of key bindings for screen  | 148 |
| 9.3  | Information on the initialization of vim   | 152 |
| 9.4  | List of system log analyzers   | 153 |
| 9.5  | Display examples of time and date for the "ls -l" command with the <b>time style value</b> | 154 |
| 9.6  | List of graphics image manipulation tools  | 155 |
| 9.7  | List of packages which can record configuration history                                    | 155 |
| 9.8  | List of tools for monitoring and controlling program activities                            | 156 |

---

|   |     |
|---|-----|
| 9.9 List of nice values for the scheduling priority . . . . .   | 157 |
| 9.10 List of ps command styles . . . . .  | 157 |
| 9.11 List of frequently used signals for kill command . . . . .   | 162 |
| 9.12 List of notable SAK command keys . . . . .   | 163 |
| 9.13 List of hardware identification tools . . . . .  | 165 |
| 9.14 List of hardware configuration tools . . . . .   | 165 |
| 9.15 List of sound packages . . . . .   | 167 |
| 9.16 List of commands for disabling the screen saver . . . . .  | 167 |
| 9.17 List of memory sizes reported . . . . .  | 168 |
| 9.18 List of tools for system security and integrity check . . . . .  | 169 |
| 9.19 List of disk partition management packages . . . . .   | 170 |
| 9.20 List of filesystem management packages . . . . .   | 172 |
| 9.21 List of packages which view and edit binary data . . . . .   | 180 |
| 9.22 List of packages to manipulate files without mounting disk . . . . .   | 181 |
| 9.23 List of tools to add data redundancy to files . . . . .  | 181 |
| 9.24 List of packages for data file recovery and forensic analysis . . . . .                                      | 181 |
| 9.25 List of data encryption utilities . . . . .  | 185 |
| 9.26 List of key packages to be installed for the kernel recompilation on the Debian system . . . . .             | 187 |
| 9.27 List of virtualization tools . . . . .   | 190 |
| 10.1 List of archive and compression tools . . . . .  | 196 |
| 10.2 List of copy and synchronization tools . . . . .   | 197 |
| 10.3 List of filesystem choices for removable storage devices with typical usage scenarios . . . . .              | 201 |
| 10.4 List of the network service to choose with the typical usage scenario . . . . .                              | 202 |
| 10.5 List of backup suite utilities . . . . .   | 205 |
| 10.6 List of data security infrastructure tools . . . . .   | 208 |
| 10.7 List of GNU Privacy Guard commands for the key management . . . . .  | 209 |
| 10.8 List of the meaning of the trust code . . . . .  | 209 |
| 10.9 List of GNU Privacy Guard commands on files . . . . .  | 211 |
| 10.10 List of source code merge tools . . . . .   | 213 |
| 10.11 List of git related packages and commands . . . . .   | 214 |
| 10.12 Main Git commands . . . . .   | 216 |
| 10.13 Git tips . . . . .  | 217 |
| 10.14 List of other version control system tools . . . . .  | 218 |
| 11.1 List of text data conversion tools . . . . .   | 219 |
| 11.2 List of encoding values and their usage . . . . .  | 220 |
| 11.3 List of EOL styles for different platforms . . . . .   | 221 |
| 11.4 List of TAB conversion commands from <code>bsdmainutils</code> and <code>coreutils</code> packages . . . . . | 222 |

---

|   |     |
|---|-----|
| 11.5 List of tools to extract plain text data . . . . .                             | 223 |
| 11.6 List of tools to highlight plain text data . . . . .                           | 224 |
| 11.7 List of predefined entities for XML . . . . .                                  | 225 |
| 11.8 List of XML tools . . . . .  | 226 |
| 11.9 List of DSSSL tools . . . . .  | 226 |
| 11.10List of XML data extraction tools . . . . .                                    | 226 |
| 11.11List of XML pretty print tools . . . . .                                       | 227 |
| 11.12List of type setting tools . . . . .   | 227 |
| 11.13List of packages to help creating the manpage . . . . .                        | 229 |
| 11.14List of Ghostscript PostScript interpreters . . . . .                          | 229 |
| 11.15List of printable data utilities . . . . .                                     | 230 |
| 11.16List of packages to help mail data conversion . . . . .                        | 231 |
| 11.17List of graphics data tools (metapackage) . . . . .                            | 232 |
| 11.18List of graphics data tools (GUI) . . . . .                                    | 233 |
| 11.19List of graphics data tools (CLI) . . . . .                                    | 234 |
| 11.20List of miscellaneous data conversion tools . . . . .                          | 235 |
|   |     |
| 12.1 List of typical bashisms . . . . .   | 237 |
| 12.2 List of shell parameters . . . . .   | 238 |
| 12.3 List of shell parameter expansions . . . . .                                   | 238 |
| 12.4 List of key shell parameter substitutions . . . . .                            | 238 |
| 12.5 List of file comparison operators in the conditional expression . . . . .      | 239 |
| 12.6 List of string comparison operators in the conditional expression . . . . .    | 240 |
| 12.7 List of packages containing small utility programs for shell scripts . . . . . | 242 |
| 12.8 List of interpreter related packages . . . . .                                 | 242 |
| 12.9 List of dialog programs . . . . .  | 243 |
| 12.10List of compiler related packages . . . . .                                    | 245 |
| 12.11List of Yacc-compatible LALR parser generators . . . . .                       | 246 |
| 12.12List of tools for static code analysis . . . . .                               | 249 |
| 12.13List of debug packages . . . . .   | 249 |
| 12.14List of advanced gdb commands . . . . .  | 251 |
| 12.15List of memory leak detection tools . . . . .                                  | 252 |
| 12.16List of build tool packages . . . . .  | 253 |
| 12.17List of make automatic variables . . . . .                                     | 253 |
| 12.18List of make variable expansions . . . . .                                     | 253 |
| 12.19List of source code translation tools . . . . .                                | 255 |

---

## **Abstract**

This book is free; you may redistribute it and/or modify it under the terms of the GNU General Public License of any version compliant to the Debian Free Software Guidelines (DFSG).

# Preface

This [Debian Reference \(version 2.140\)](#) (2026-06-25 05:00:57 UTC) is intended to provide a broad overview of the Debian system administration as a post-installation user guide.

The target reader is someone who is willing to learn shell scripts but who is not ready to read all the C sources to figure out how the [GNU/Linux](#) system works.

For installation instructions, see:

- [Debian GNU/Linux Installation Guide for current stable system](#)
- [Debian GNU/Linux Installation Guide for current testing system](#)

## Disclaimer

All warranties are disclaimed. All trademarks are property of their respective trademark owners.

The Debian system itself is a moving target. This makes its documentation difficult to be current and correct. Although the current testing version of the Debian system was used as the basis for writing this, some contents may be already outdated by the time you read this.

Please treat this document as the secondary reference. This document does not replace any authoritative guides. The author and contributors do not take responsibility for consequences of errors, omissions or ambiguity in this document.

## What is Debian

The [Debian Project](#) is an association of individuals who have made common cause to create a free operating system. It's distribution is characterized by the following.

- Commitment to the software freedom: [Debian Social Contract and Debian Free Software Guidelines \(DFSG\)](#)
- Internet based distributed unpaid volunteer effort: <https://www.debian.org>
- Large number of pre-compiled high quality software packages
- Focus on stability and security with easy access to the security updates
- Focus on smooth upgrade to the latest software packages in the testing archives
- Large number of supported hardware architectures

Free Software pieces in Debian come from [GNU](#), [Linux](#), [BSD](#), [X](#), [ISC](#), [Apache](#), [Ghostscript](#), [Common Unix Printing System](#), [Samba](#), [GNOME](#), [KDE](#), [Mozilla](#), [LibreOffice](#), [Vim](#), [TeX](#), [LaTeX](#), [DocBook](#), [Perl](#), [Python](#), [Tcl](#), [Java](#), [Ruby](#), [PHP](#), [Berkeley DB](#), [MariaDB](#), [PostgreSQL](#), [SQLite](#), [Exim](#), [Postfix](#), [Mutt](#), [FreeBSD](#), [OpenBSD](#), [Plan 9](#) and many more independent free software projects. Debian integrates this diversity of Free Software into one system.

---

## About this document

### Guiding rules

Following guiding rules are followed while compiling this document.

- Provide overview and skip corner cases. (**Big Picture**)
- Keep It Short and Simple. (**KISS**)
- Do not reinvent the wheel. (Use pointers to **the existing references**)
- Focus on non-GUI tools and consoles. (Use **shell examples**)
- Be objective. (Use [popcon](#) etc.)

---

#### Tip

I tried to elucidate hierarchical aspects and lower levels of the system.

---

### Prerequisites



#### Warning

You are expected to make good efforts to seek answers by yourself beyond this documentation. This document only gives efficient starting points.

---

You must seek solution by yourself from primary sources.

- The Debian site at <https://www.debian.org> for the general information
- The documentation under the `"/usr/share/doc/package_name"` directory
- The Unix style **manpage**: `"dpkg -L package_name |grep '/man/man.*/'"`
- The GNU style **info page**: `"dpkg -L package_name |grep '/info/'"`
- The bug report: [https://bugs.debian.org/package\\_name](https://bugs.debian.org/package_name)
- The Debian Wiki at <https://wiki.debian.org/> for the moving and specific topics
- The Single UNIX Specification from the Open Group's [The UNIX System Home Page](#)
- The free encyclopedia from Wikipedia at <https://www.wikipedia.org/>
- [The Debian Administrator's Handbook](#)
- The HOWTOs from [The Linux Documentation Project \(TLPD\)](#)

---

#### Note

For detailed documentation, you may need to install the corresponding documentation package named with `"- doc"` as its suffix.

---



## Conventions

This document provides information through the following simplified presentation style with `bash(1)` shell command examples.

```
# command-in-root-account
$ command-in-user-account
```

These shell prompts distinguish account used and correspond to set environment variables as: "`PS1='\$'`" and "`PS2=' '`". These values are chosen for the sake of readability of this document and are not typical on actual installed system.

All command examples are run under the English locale "`LANG=en_US.UTF8`". Please don't expect the placeholder strings such as *command-in-root-account* and *command-in-user-account* to be translated in command examples. This is an intentional choice to keep all translated examples to be up-to-date.

---

### Note

See the meaning of the "`$PS1`" and "`$PS2`" environment variables in `bash(1)`.

---

**Action** required by the system administrator is written in the imperative sentence, e.g. "Type Enter-key after typing each command string to the shell."

The **description** column and similar ones in the table may contain a **noun phrase** following [the package short description convention](#) which drops leading articles such as "a" and "the". They may alternatively contain an infinitive phrase as a **noun phrase** without leading "to" following the short command description convention in manpages. These may look funny to some people but are my intentional choices of style to keep this documentation as simple as possible. These **Noun phrases** do not capitalize their starting nor end with periods following these short description convention.

---

### Note

Proper nouns including command names keeps their case irrespective of their location.

---

A **command snippet** quoted in a text paragraph is referred by the typewriter font between double quotation marks, such as "`aptitude safe-upgrade`".

A **text data** from a configuration file quoted in a text paragraph is referred by the typewriter font between double quotation marks, such as "`deb-src`".

A **command** is referred by its name in the typewriter font optionally followed by its manpage section number in parenthesis, such as `bash(1)`. You are encouraged to obtain information by typing the following.

```
$ man 1 bash
```

A **manpage** is referred by its name in the typewriter font followed by its manpage section number in parenthesis, such as `sources.list(5)`. You are encouraged to obtain information by typing the following.

```
$ man 5 sources.list
```

An **info page** is referred by its command snippet in the typewriter font between double quotation marks, such as "`info make`". You are encouraged to obtain information by typing the following.

```
$ info make
```

A **filename** is referred by the typewriter font between double quotation marks, such as "`/etc/passwd`". For configuration files, you are encouraged to obtain information by typing the following.

```
$ sensible-pager "/etc/passwd"
```

---

A **directory name** is referred by the typewriter font between double quotation marks, such as `"/etc/apt/"`. You are encouraged to explore its contents by typing the following.

```
$ mc "/etc/apt/"
```

A **package name** is referred by its name in the typewriter font, such as `vim`. You are encouraged to obtain information by typing the following.

```
$ dpkg -L vim
$ apt-cache show vim
$ aptitude show vim
```

A **documentation** may indicate its location by the filename in the typewriter font between double quotation marks, such as `"/usr/share/doc/base-passwd/users-and-groups.txt.gz"` and `"/usr/share/doc/base-passwd/users-and-groups.html"` or by its [URL](https://www.debian.org), such as <https://www.debian.org>. You are encouraged to read the documentation by typing the following.

```
$ zcat "/usr/share/doc/base-passwd/users-and-groups.txt.gz" | sensible-pager
$ sensible-browser "/usr/share/doc/base-passwd/users-and-groups.html"
$ sensible-browser "https://www.debian.org"
```

An **environment variable** is referred by its name with leading `"$"` in the typewriter font between double quotation marks, such as `"$TERM"`. You are encouraged to obtain its current value by typing the following.

```
$ echo "$TERM"
```

## The popcon

The [popcon](#) data is presented as the objective measure for the popularity of each package. It was downloaded on 2026-06-24 05:34:52 UTC and contains the total submission of 279651 reports over 217947 binary packages and 25 architectures.

---

### Note

Please note that the amd64 unstable archive contains only 77010 packages currently. The popcon data contains reports from many old system installations.

---

The popcon number preceded with "V:" for "votes" is calculated by  $1000 * (\text{the popcon submissions for the package executed recently on the PC}) / (\text{the total popcon submissions})$ .

The popcon number preceded with "I:" for "installs" is calculated by  $1000 * (\text{the popcon submissions for the package installed on the PC}) / (\text{the total popcon submissions})$ .

---

### Note

The popcon figures should not be considered as absolute measures of the importance of packages. There are many factors which can skew statistics. For example, some system participating popcon may have mounted directories such as `"/usr/bin"` with `"noatime"` option for system performance improvement and effectively disabled "vote" from such system.

---

## The package size

The package size data is also presented as the objective measure for each package. It is based on the `"Installed-Size:"` reported by `"apt-cache show"` or `"aptitude show"` command (currently on amd64 architecture for the unstable release). The reported size is in KiB ([Kibibyte](#) = unit for 1024 bytes).

---

---

**Note**

A package with a small numerical package size may indicate that the package in the unstable release is a dummy package which installs other packages with significant contents by the dependency. The dummy package enables a smooth transition or split of the package.

---

---

**Note**

A package size followed by "(\*)" indicates that the package in the unstable release is missing and the package size for the experimental release is used instead.

---

## Bug reports on this document

Please file bug reports on the debian-reference package using `reportbug(1)` if you find any issues on this document. Please include correction suggestion by `"diff -u"` to the plain text version or to the source.

## Reminders for new users

Here are some reminders for new users:

- Backup your data
  - See Section [10.2](#).
- Secure your password and security keys
- [KISS \(keep it simple stupid\)](#)
  - Don't over-engineer your system
- Read your log files
  - The **FIRST** error is the one that counts
- [RTFM \(read the fine manual\)](#)
- Search the Internet before asking questions
- Don't be root when you don't have to be
- Don't mess with the package management system
- Don't type anything you don't understand
- Don't change the file permissions (before the full security review)
- Don't leave your root shell until you **TEST** your changes
- Always have an alternative boot media ([USB flash drive](#), [CD-ROM](#), ...)

## Some quotes for new users

Here are some interesting quotes from the Debian mailing list which may help enlighten new users.

- "This is Unix. It gives you enough rope to hang yourself." --- Miquel van Smoorenburg <miquels at cistron.nl>
- "Unix IS user friendly... It's just selective about who its friends are." --- Tollef Fog Heen <tollef at add.no>

Wikipedia has article "[Unix philosophy](#)" which lists interesting quotes.

---

# Chapter 1

## GNU/Linux tutorials

I think learning a computer system is like learning a new foreign language. Although tutorial books and documentation are helpful, you have to practice it yourself. In order to help you get started smoothly, I elaborate a few basic points.

The powerful design of [Debian GNU/Linux](#) comes from the [Unix](#) operating system, i.e., a [multiuser](#), [multitasking](#) operating system. You must learn to take advantage of the power of these features and similarities between Unix and GNU/Linux.

Don't shy away from Unix oriented texts and don't rely solely on GNU/Linux texts, as this robs you of much useful information.

---

**Note**

If you have been using any [Unix-like](#) system for a while with command line tools, you probably know everything I explain here. Please use this as a reality check and refresher.

---

### 1.1 Console basics

#### 1.1.1 The shell prompt

Upon starting the system, you are presented with the character based login screen if you did not install any [GUI](#) environment such as [GNOME](#) or [KDE](#) desktop system. Suppose your hostname is `foo`, the login prompt looks as follows.

If you installed a [GUI](#) environment, then you can still get to the character based login prompt by Ctrl-Alt-F3, and you can return to the GUI environment via Ctrl-Alt-F2 (see Section [1.1.6](#) below for more).

```
foo login:
```

At the login prompt, you type your username, e.g. `penguin`, and press the Enter-key, then type your password and press the Enter-key again.

---

**Note**

Following the Unix tradition, the username and password of the Debian system are case sensitive. The username is usually chosen only from the lowercase. The first user account is usually created during the installation. Additional user accounts can be created with `adduser(8)` by root.

---

The system starts with the greeting message stored in `/etc/motd` (Message Of The Day) and presents a command prompt.

---

```
Debian GNU/Linux 12 foo tty3

foo login: penguin
Password:

Linux foo 6.5.0-0.deb12.4-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.5.10-1~bpo12+1 (2023-11-23) ↵
x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

Last login: Wed Dec 20 09:39:00 JST 2023 on tty3
foo:~$
```

Now you are in the [shell](#). The shell interprets your commands.

### 1.1.2 The shell prompt under GUI

If you installed a [GUI](#) environment during the installation, you are presented with the graphical login screen upon starting your system. You type your username and your password to login to the non-privileged user account. Use tab to navigate between username and password, or use the primary click of the mouse.

You can gain the shell prompt under GUI environment by starting a x-terminal-emulator program such as `gnome-terminal(1)`, `rxvt(1)` or `xterm(1)`. Under the GNOME desktop environment, press SUPER-key (Windows-key) and typing in "terminal" to the search prompt does the trick.

Under some other Desktop systems (like `fluxbox`), there may be no obvious starting point for the menu. If this happens, just try (right) clicking the background of the desktop screen and hope for a menu to pop-up.

### 1.1.3 The root account

The root account is also called [superuser](#) or privileged user. From this account, you can perform the following system administration tasks.

- Read, write, and remove any files on the system irrespective of their file permissions
- Set file ownership and permissions of any files on the system
- Set the password of any non-privileged users on the system
- Login to any accounts without their passwords

This unlimited power of root account requires you to be considerate and responsible when using it.



#### Warning

Never share the root password with others.

---

#### Note

File permissions of a file (including hardware devices such as CD-ROM etc. which are just another file for the Debian system) may render it unusable or inaccessible by non-root users. Although the use of root account is a quick way to test this kind of situation, its resolution should be done through proper setting of file permissions and user's group membership (see Section [1.2.3](#)).

---

### 1.1.4 The root shell prompt

Here are a few basic methods to gain the root shell prompt by using the root password.

- Type `root` at the character based login prompt.
- Type `"su -l"` from any user shell prompt.
  - This does not preserve the environment of the current user.
- Type `"su"` from any user shell prompt.
  - This preserves some of the environment of the current user.

### 1.1.5 GUI system administration tools

When your desktop menu does not start GUI system administration tools automatically with the appropriate privilege, you can start them from the root shell prompt of the terminal emulator, such as `gnome-terminal(1)`, `rxvt(1)`, or `xterm(1)`. See Section 1.1.4 and Section 7.9.

**Warning**

Never start the GUI display/session manager under the root account by typing in `root` to the prompt of the display manager such as `gdm3(1)`.  
Never run untrusted remote GUI program under X Window when critical information is displayed since it may eavesdrop your X screen.

---

### 1.1.6 Virtual consoles

In the default Debian system, there are six switchable [VT100-like](#) character consoles available to start the command shell directly on the Linux host. Unless you are in a GUI environment, you can switch between the virtual consoles by pressing the `Left-Alt`-key and one of the `F1` — `F6` keys simultaneously. Each character console allows independent login to the account and offers the multiuser environment. This multiuser environment is a great Unix feature, and very addictive.

If you are in the GUI environment, you gain access to the character console 3 by pressing `Ctrl-Alt-F3` key, i.e., the `left-Ctrl`-key, the `left-Alt`-key, and the `F3`-key are pressed together. You can get back to the GUI environment, normally running on the virtual console 2, by pressing `Alt-F2`.

You can alternatively change to another virtual console, e.g. to the console 3, from the commandline.

```
# chvt 3
```

### 1.1.7 How to leave the command prompt

You type `Ctrl-D`, i.e., the `left-Ctrl`-key and the `d`-key pressed together, at the command prompt to close the shell activity. If you are at the character console, you return to the login prompt with this. Even though these control characters are referred as "control D" with the upper case, you do not need to press the `Shift`-key. The short hand expression, `^D`, is also used for `Ctrl-D`. Alternately, you can type "exit".

If you are at `x-terminal-emulator(1)`, you can close `x-terminal-emulator` window with this.

---

### 1.1.8 How to shutdown the system

Just like any other modern OS where the file operation involves [caching data](#) in memory for improved performance, the Debian system needs the proper shutdown procedure before power can safely be turned off. This is to maintain the integrity of files, by forcing all changes in memory to be written to disk. If the software power control is available, the shutdown procedure automatically turns off power of the system. (Otherwise, you may have to press power button for few seconds after the shutdown procedure.)

You can shutdown the system under the normal multiuser mode from the commandline.

```
# shutdown -h now
```

You can shutdown the system under the single-user mode from the commandline.

```
# poweroff -i -f
```

See Section [6.3.8](#).

### 1.1.9 Recovering a sane console

When the screen goes berserk after doing some funny things such as "cat *some-binary-file*", type "reset" at the command prompt. You may not be able to see the command echoed as you type. You may also issue "clear" to clean up the screen.

#### 1.1.10 Additional package suggestions for the newbie

Although even the minimal installation of the Debian system without any desktop environment tasks provides the basic Unix functionality, it is a good idea to install few additional commandline and curses based character terminal packages such as mc and vim with apt-get(8) for beginners to get started by the following.

```
# apt-get update
...
# apt-get install mc vim sudo aptitude
...
```

If you already had these packages installed, no new packages are installed.

| package                   | popcon                       | size                  | description  |
|---------------------------|------------------------------|-----------------------|--|
| <a href="#">mc</a>        | <a href="#">V:41, I:182</a>  | <a href="#">1590</a>  | A text-mode full-screen file manager                                       |
| <a href="#">sudo</a>      | <a href="#">V:749, I:866</a> | <a href="#">6774</a>  | A program to allow limited root privileges to users                        |
| <a href="#">vim</a>       | <a href="#">V:85, I:347</a>  | <a href="#">4135</a>  | Unix text editor Vi IMproved, a programmers text editor (standard version) |
| <a href="#">vim-tiny</a>  | <a href="#">V:57, I:979</a>  | <a href="#">1862</a>  | Unix text editor Vi IMproved, a programmers text editor (compact version)  |
| <a href="#">emacs-nox</a> | <a href="#">V:3, I:13</a>    | <a href="#">46564</a> | GNU project Emacs, the Lisp based extensible text editor                   |
| <a href="#">w3m</a>       | <a href="#">V:11, I:137</a>  | <a href="#">2853</a>  | Text-mode WWW browsers   |
| <a href="#">gpm</a>       | <a href="#">V:8.7, I:9.5</a> | <a href="#">524</a>   | The Unix style cut-and-paste on the text console (daemon)                  |

Table 1.1: List of interesting text-mode program packages

It may be a good idea to read some informative documentations.

You can install some of these packages by the following.

```
# apt-get install package_name
```

| package                              | popcon                       | size                  | description  |
|--------------------------------------|------------------------------|-----------------------|--|
| <a href="#">doc-debian</a>           | <a href="#">1:883</a>        | <a href="#">185</a>   | Debian Project documentation, (Debian FAQ) and other documents |
| <a href="#">debian-policy</a>        | <a href="#">1:7.4</a>        | <a href="#">5147</a>  | Debian Policy Manual and related documents                     |
| <a href="#">developers-reference</a> | <a href="#">V:0.2, 1:2.4</a> | <a href="#">2635</a>  | Guidelines and information for Debian developers               |
| <a href="#">debmake-doc</a>          | <a href="#">1:0.37</a>       | <a href="#">11807</a> | Guide for Debian Maintainers                                   |
| <a href="#">debian-history</a>       | <a href="#">1:0.51</a>       | <a href="#">6251</a>  | History of the Debian Project                                  |
| <a href="#">debian-faq</a>           | <a href="#">1:882</a>        | <a href="#">791</a>   | Debian FAQ   |

Table 1.2: List of informative documentation packages

### 1.1.11 An extra user account

If you do not want to use your main user account for the following training activities, you can create a training user account, e.g. `fish` by the following.

```
# adduser fish
```

Answer all questions.

This creates a new account named as `fish`. After your practice, you can remove this user account and its home directory by the following.

```
# deluser --remove-home fish
```

On non-Debian and specialized Debian systems, above activities need to use lower level user `add(8)` and user `del(8)` utilities, instead.

### 1.1.12 sudo configuration

For the typical single user workstation such as the desktop Debian system on the laptop PC, it is common to deploy simple configuration of `sudo(8)` as follows to let the non-privileged user, e.g. `penguin`, to gain administrative privilege just with his user password but without the root password.

```
# echo "penguin ALL=(ALL) ALL" >> /etc/sudoers
```

Alternatively, it is also common to do as follows to let the non-privileged user, e.g. `penguin`, to gain administrative privilege without any password.

```
# echo "penguin ALL=(ALL) NOPASSWD:ALL" >> /etc/sudoers
```

This trick should only be used for the single user workstation which you administer and where you are the only user.



#### Warning

Do not set up accounts of regular users on multiuser workstation like this because it would be very bad for system security.



#### Caution

The password and the account of the `penguin` in the above example requires as much protection as the root password and the root account.

Administrative privilege in this context belongs to someone authorized to perform the system administration task on the workstation. Never give some manager in the Admin department of your company or your boss such privilege unless they are authorized and capable.



---

**Note**

For providing access privilege to limited devices and limited files, you should consider to use **group** to provide limited access instead of using the **root** privilege via `sudo(8)`.

With more thoughtful and careful configuration, `sudo(8)` can grant limited administrative privileges to other users on a shared system without sharing the root password. This can help with accountability with hosts with multiple administrators so you can tell who did what. On the other hand, you might not want anyone else to have such privileges.

---

### 1.1.13 Play time

Now you are ready to play with the Debian system without risks as long as you use the non-privileged user account.

This is because the Debian system is, even after the default installation, configured with proper file permissions which prevent non-privileged users from damaging the system. Of course, there may still be some holes which can be exploited but those who worry about these issues should not be reading this section but should be reading [Securing Debian Manual](#).

We learn the Debian system as a [Unix-like](#) system with the following.

- Section [1.2](#) (basic concept)
- Section [1.3](#) (survival method)
- Section [1.4](#) (basic method)
- Section [1.5](#) (shell mechanism)
- Section [1.6](#) (text processing method)

## 1.2 Unix-like filesystem

In GNU/Linux and other [Unix-like](#) operating systems, [files](#) are organized into [directories](#). All files and directories are arranged in one big tree rooted at `/`. It's called a tree because if you draw the filesystem, it looks like a tree but it is upside down.

These files and directories can be spread out over several devices. `mount(8)` serves to attach the filesystem found on some device to the big file tree. Conversely, `umount(8)` detaches it again. On recent Linux kernels, `mount(8)` with some options can bind part of a file tree somewhere else or can mount filesystem as shared, private, slave, or unbindable. Supported mount options for each filesystem are available in `/usr/share/doc/linux-doc-*/Documentation/f`.

**Directories** on Unix systems are called **folders** on some other systems. Please also note that there is no concept for **drive** such as `"A:"` on any Unix system. There is one filesystem, and everything is included. This is a huge advantage compared to Windows.

### 1.2.1 Unix file basics

Here are some Unix file basics.

- Filenames are **case sensitive**. That is, `"MYFILE"` and `"MyFile"` are different files.
  - The **root directory** means root of the filesystem referred as simply `/`. Don't confuse this with the home directory for the root user: `/root`.
  - Every directory has a name which can contain any letters or symbols **except** `/`. The root directory is an exception; its name is `/` (pronounced "slash" or "the root directory") and it cannot be renamed.
-

- Each file or directory is designated by a **fully-qualified filename**, **absolute filename**, or **path**, giving the sequence of directories which must be passed through to reach it. The three terms are synonymous.
- All **fully-qualified filenames** begin with the `"/"` directory, and there's a `"/"` between each directory or file in the filename. The first `"/"` is the top level directory, and the other `"/"`s separate successive subdirectories, until we reach the last entry which is the name of the actual file. The words used here can be confusing. Take the following **fully-qualified filename** as an example: `"/usr/share/keytables/us.map.gz"`. However, people also refers to its basename `"us.map.gz"` alone as a filename.
- The root directory has a number of branches, such as `"/etc/"` and `"/usr/"`. These subdirectories in turn branch into still more subdirectories, such as `"/etc/systemd/"` and `"/usr/local/"`. The whole thing viewed collectively is called the **directory tree**. You can think of an absolute filename as a route from the base of the tree (`"/"`) to the end of some branch (a file). You also hear people talk about the directory tree as if it were a **family** tree encompassing all direct descendants of a single figure called the root directory (`"/"`): thus subdirectories have **parents**, and a path shows the complete ancestry of a file. There are also relative paths that begin somewhere other than the root directory. You should remember that the directory `". . /"` refers to the parent directory. This terminology also applies to other directory like structures, such as hierarchical data structures.
- There's no special directory path name component that corresponds to a physical device, such as your hard disk. This differs from [RT-11](#), [CP/M](#), [OpenVMS](#), [MS-DOS](#), [AmigaOS](#), and [Microsoft Windows](#), where the path contains a device name such as `"C:\"`. (However, directory entries do exist that refer to physical devices as a part of the normal filesystem. See [Section 1.2.2.](#))

---

**Note**

While you **can** use almost any letters or symbols in a file name, in practice it is a bad idea to do so. It is better to avoid any characters that often have special meanings on the command line, including spaces, tabs, newlines, and other special characters: `{ } ( ) [ ] ' ` " \ / > < | ; ! # & ^ * % @ $ .` If you want to separate words in a name, good choices are the period, hyphen, and underscore. You could also capitalize each word, `"LikeThis"`. Experienced Linux users tend to avoid spaces in filenames.

---

---

**Note**

The word `"root"` can mean either `"root user"` or `"root directory"`. The context of their usage should make it clear.

---

---

**Note**

The word **path** is used not only for **fully-qualified filename** as above but also for the **command search path**. The intended meaning is usually clear from the context.

---

The detailed best practices for the file hierarchy are described in the Filesystem Hierarchy Standard (`"/usr/share/doc/debian/filesystem-hierarchy-standard"` and `hier(7)`). You should remember the following facts as the starter.

| directory              | usage of the directory                                |
|------------------------|---|
| <code>/</code>         | the root directory                                    |
| <code>/etc/</code>     | system wide configuration files                       |
| <code>/var/log/</code> | system log files                                      |
| <code>/home/</code>    | all the home directories for all non-privileged users |

Table 1.3: List of usage of key directories

### 1.2.2 Filesystem internals

Following the **Unix tradition**, the Debian GNU/Linux system provides the **filesystem** under which physical data on hard disks and other storage devices reside, and the interaction with the hardware devices such as console screens and remote serial consoles are represented in an unified manner under `"/dev/"`.

Each file, directory, named pipe (a way two programs can share data), or physical device on a Debian GNU/Linux system has a data structure called an **inode** which describes its associated attributes such as the user who owns it (owner), the group that it belongs to, the time last accessed, etc. The idea of representing just about everything in the filesystem was a Unix innovation, and modern Linux kernels have developed this idea ever further. Now, even information about processes running in the computer can be found in the filesystem.

This abstract and unified representation of physical entities and internal processes is very powerful since this allows us to use the same command for the same kind of operation on many totally different devices. It is even possible to change the way the kernel works by writing data to special files that are linked to running processes.

---

**Tip**

If you need to identify the correspondence between the file tree and the physical entity, execute `mount(8)` with no arguments.

---

### 1.2.3 Filesystem permissions

**Filesystem permissions** of **Unix-like** system are defined for three categories of affected users.

- The **user** who owns the file (**u**)
- Other users in the **group** which the file belongs to (**g**)
- All **other** users (**o**) also referred to as "world" and "everyone"

For the file, each corresponding permission allows following actions.

- The **read (r)** permission allows owner to examine contents of the file.
- The **write (w)** permission allows owner to modify the file.
- The **execute (x)** permission allows owner to run the file as a command.

For the directory, each corresponding permission allows following actions.

- The **read (r)** permission allows owner to list contents of the directory.
- The **write (w)** permission allows owner to add or remove files in the directory.
- The **execute (x)** permission allows owner to access files in the directory.

Here, the **execute** permission on a directory means not only to allow reading of files in that directory but also to allow viewing their attributes, such as the size and the modification time.

`ls(1)` is used to display permission information (and more) for files and directories. When it is invoked with the `"-l"` option, it displays the following information in the order given.

- **Type of file** (first character)
  - Access **permission** of the file (nine characters, consisting of three characters each for user, group, and other in this order)
  - **Number of hard links** to the file
-

- Name of the **user** who owns the file
- Name of the **group** which the file belongs to
- **Size** of the file in characters (bytes)
- **Date and time** of the file (mtime)
- **Name** of the file

| character | meaning               |
|-----------|-----------------------|
| -         | normal file           |
| d         | directory             |
| l         | symlink               |
| c         | character device node |
| b         | block device node     |
| p         | named pipe            |
| s         | socket                |

Table 1.4: List of the first character of "ls -l" output

chown(1) is used from the root account to change the owner of the file. chgrp(1) is used from the file's owner or root account to change the group of the file. chmod(1) is used from the file's owner or root account to change file and directory access permissions. Basic syntax to manipulate a foo file is the following.

```
# chown newowner foo
# chgrp newgroup foo
# chmod [ugoa][+ -=][rwxXst][, ...] foo
```

For example, you can make a directory tree to be owned by a user foo and shared by a group bar by the following.

```
# cd /some/location/
# chown -R foo:bar .
# chmod -R ug+rwX,o=rX .
```

There are three more special permission bits.

- The **set user ID** bit (**s** or **S** instead of user's **x**)
- The **set group ID** bit (**s** or **S** instead of group's **x**)
- The **sticky** bit (**t** or **T** instead of other's **x**)

Here the output of "ls -l" for these bits is **capitalized** if execution bits hidden by these outputs are **unset**.

Setting **set user ID** on an executable file allows a user to execute the executable file with the owner ID of the file (for example **root**). Similarly, setting **set group ID** on an executable file allows a user to execute the executable file with the group ID of the file (for example **root**). Because these settings can cause security risks, enabling them requires extra caution.

Setting **set group ID** on a directory enables the [BSD-like](#) file creation scheme where all files created in the directory belong to the **group** of the directory.

Setting the **sticky bit** on a directory prevents a file in the directory from being removed by a user who is not the owner of the file. In order to secure contents of a file in world-writable directories such as `/tmp` or in group-writable directories, one must not only reset the **write** permission for the file but also set the **sticky bit** on the directory. Otherwise, the file can be removed and a new file can be created with the same name by any user who has write access to the directory.

Here are a few interesting examples of file permissions.

```
$ ls -l /etc/passwd /etc/shadow /dev/ppp /usr/sbin/exim4
crw-----T 1 root root    108, 0 Oct 16 20:57 /dev/ppp
-rw-r--r-- 1 root root    2761 Aug 30 10:38 /etc/passwd
-rw-r----- 1 root shadow  1695 Aug 30 10:38 /etc/shadow
-rwsr-xr-x 1 root root   973824 Sep 23 20:04 /usr/sbin/exim4
$ ls -ld /tmp /var/tmp /usr/local /var/mail /usr/src
drwxrwxrwt 14 root root   20480 Oct 16 21:25 /tmp
drwxrwsr-x 10 root staff   4096 Sep 29 22:50 /usr/local
drwxr-xr-x 10 root root    4096 Oct 11 00:28 /usr/src
drwxrwsr-x  2 root mail    4096 Oct 15 21:40 /var/mail
drwxrwxrwt  3 root root    4096 Oct 16 21:20 /var/tmp
```

There is an alternative numeric mode to describe file permissions with `chmod(1)`. This numeric mode uses 3 to 4 digit wide octal (radix=8) numbers.

| digit              | meaning   |
|--------------------|---|
| 1st optional digit | sum of <b>set user ID</b> (=4), <b>set group ID</b> (=2), and <b>sticky bit</b> (=1)            |
| 2nd digit          | sum of <b>read</b> (=4), <b>write</b> (=2), and <b>execute</b> (=1) permissions for <b>user</b> |
| 3rd digit          | ditto for <b>group</b>  |
| 4th digit          | ditto for <b>other</b>  |

Table 1.5: The numeric mode for file permissions in `chmod(1)` commands

This sounds complicated but it is actually quite simple. If you look at the first few (2-10) columns from "`ls -l`" command output and read it as a binary (radix=2) representation of file permissions ("`-`" being "0" and "`rw`" being "1"), the last 3 digit of the numeric mode value should make sense as an octal (radix=8) representation of file permissions to you.

For example, try the following

```
$ touch foo bar
$ chmod u=rw,go=r foo
$ chmod 644 bar
$ ls -l foo bar
-rw-r--r-- 1 penguin penguin 0 Oct 16 21:39 bar
-rw-r--r-- 1 penguin penguin 0 Oct 16 21:35 foo
```

### Tip

If you need to access information displayed by "`ls -l`" in shell script, you should use pertinent commands such as `test(1)`, `stat(1)` and `readlink(1)`. The shell builtin such as "`[`" or "`test`" may be used too.

## 1.2.4 Control of permissions for newly created files: `umask`

What permissions are applied to a newly created file or directory is restricted by the `umask` shell builtin command. See `dash(1)`, `bash(1)`, and `builtins(7)`.

```
(file permissions) = (requested file permissions) & ~(umask value)
```

The Debian system uses a user private group (UPG) scheme as its default. A UPG is created whenever a new user is added to the system. A UPG has the same name as the user for which it was created and that user is the only member of the UPG. UPG scheme makes it safe to set `umask` to `0002` since every user has their own private group. (In some Unix variants, it is quite common to setup all normal users belonging to a single **users** group and is a good idea to set `umask` to `0022` for security in such cases.)

| umask | file permissions created | directory permissions created | usage                     |
|-------|--------------------------|-------------------------------|---------------------------|
| 0022  | -rw-r--r--               | -rwxr-xr-x                    | writable only by the user |
| 0002  | -rw-rw-r--               | -rwxrwxr-x                    | writable by the group     |

Table 1.6: The **umask** value examples**Tip**

Enable UPG by putting "umask 002" in the ~/.bashrc file.

### 1.2.5 Permissions for groups of users (group)

**Warning**

Please make sure to save unsaved changes before doing reboot or similar actions.

You can add a user penguin to a group bird in two steps:

- Change group configuration using one of following:
  - Execute "sudo usermod -aG bird penguin".
  - Execute "sudo adduser penguin bird". (only on typical Debian systems)
  - Execute "sudo vigr" for /etc/group and "sudo vigr -s" for /etc/gshadow to append penguin in the line for bird.
- Apply configuration using one of following:
  - Cold reboot and login. (Best option)
  - Logout via GUI menu and login. (This may not work under the modern Desktop environment.)

You can remove a user penguin from a group bird in two steps:

- Change group configuration using one of following:
  - Execute "sudo usermod -rG bird penguin".
  - Execute "sudo deluser penguin bird". (only on typical Debian systems)
  - Execute "sudo vigr" for /etc/group and "sudo vigr -s" for /etc/gshadow to remove penguin in the line for bird.
- Apply configuration using one of following:
  - Cold reboot and login. (Best option)
  - Execute "kill -TERM -1" and do some fix-up actions such as "systemctl restart NetworkManager.service"
  - Logout via GUI menu is not an option for Gnome Desktop.

Any warm reboot attempts are fragile replacements of the real cold reboot under the modern desktop system.

**Note**

Alternatively, you may dynamically add users to groups during the authentication process by adding "auth optional pam\_group.so" line to "/etc/pam.d/common-auth" and setting "/etc/security/group.conf". (See Chapter 4.)

The hardware devices are just another kind of file on the Debian system. If you have problems accessing devices such as [USB flash drive](#) and [CD-ROM](#) from a user account, you should make that user a member of the relevant group.

Some notable system-provided groups allow their members to access particular files and devices without root privilege.

| group   | description for accessible files and devices                                    |
|---------|---|
| dialout | full and direct access to serial ports ("/dev/ttyS[0-3]")                       |
| dip     | limited access to serial ports for <b>Dialup IP</b> connection to trusted peers |
| cdrom   | CD-ROM, DVD+/-RW drives   |
| audio   | audio device  |
| video   | video device  |
| scanner | scanner(s)  |
| adm     | system monitoring logs  |
| staff   | some directories for junior administrative work: "/usr/local", "/home"          |

Table 1.7: List of notable system-provided groups for file access

### Tip

You need to belong to the dialout group to reconfigure modem, dial anywhere, etc. But if root creates pre-defined configuration files for trusted peers in "/etc/ppp/peers/", you only need to belong to the dip group to create **Dialup IP** connection to those trusted peers using pppd(8), pon(1), and poff(1) commands.

Some notable system-provided groups allow their members to execute particular commands without root privilege.

| group   | accessible commands   |
|---------|---|
| sudo    | execute any command with superuser privileges                               |
| lpadmin | execute commands to add, modify, and remove printers from printer databases |

Table 1.8: List of notable system provided groups for particular command executions

For the full listing of the system provided users and groups, see the recent version of the "Users and Groups" document in "/usr/share/doc/base-passwd/users-and-groups.html" provided by the base-passwd package.

See passwd(5), group(5), shadow(5), newgrp(1), vipw(8), vigr(8), and pam\_group(8) for management commands of the user and group system.

## 1.2.6 Timestamps

There are three types of timestamps for a GNU/Linux file.

| type  | meaning (historic Unix definition)   |
|-------|--------------------------------------|
| mtime | the file modification time (ls -l)   |
| ctime | the file status change time (ls -lc) |
| atime | the last file access time (ls -lu)   |

Table 1.9: List of types of timestamps

### Note

**ctime** is not file creation time.

---

**Note**

The actual value of **atime** on GNU/Linux system may be different from that of the historic Unix definition.

---

- Overwriting a file changes all of the **mtime**, **ctime**, and **atime** attributes of the file.
- Changing ownership or permission of a file changes the **ctime** and **atime** attributes of the file.
- Reading a file changes the **atime** attribute of the file on the historic Unix system.
- Reading a file changes the **atime** attribute of the file on the GNU/Linux system if its filesystem is mounted with "strictatime".
- Reading a file for the first time or after one day changes the **atime** attribute of the file on the GNU/Linux system if its filesystem is mounted with "relatime". (default behavior since Linux 2.6.30)
- Reading a file doesn't change the **atime** attribute of the file on the GNU/Linux system if its filesystem is mounted with "noatime".

---

**Note**

The "noatime" and "relatime" mount options are introduced to improve the filesystem read performance under the normal use cases. Simple file read operation under the "strictatime" option accompanies the time-consuming write operation to update the **atime** attribute. But the **atime** attribute is rarely used except for the mbox(5) file. See mount(8).

---

Use touch(1) command to change timestamps of existing files.

For timestamps, the ls command outputs localized strings under non-English locale ("fr\_FR.UTF-8").

```
$ LANG=C ls -l foo
-rw-rw-r-- 1 penguin penguin 0 Oct 16 21:35 foo
$ LANG=en_US.UTF-8 ls -l foo
-rw-rw-r-- 1 penguin penguin 0 Oct 16 21:35 foo
$ LANG=fr_FR.UTF-8 ls -l foo
-rw-rw-r-- 1 penguin penguin 0 oct. 16 21:35 foo
```

---

**Tip**

See Section 9.3.4 to customize "ls -l" output.

---

### 1.2.7 Links

There are two methods of associating a file "foo" with a different filename "bar".

- [Hard link](#)
  - Duplicate name for an existing file
  - "ln foo bar"
- [Symbolic link or symlink](#)
  - Special file that points to another file by name
  - "ln -s foo bar"

See the following example for changes in link counts and the subtle differences in the result of the rm command.

---



```
$ umask 002
$ echo "Original Content" > foo
$ ls -li foo
1449840 -rw-rw-r-- 1 penguin penguin 17 Oct 16 21:42 foo
$ ln foo bar      # hard link
$ ln -s foo baz   # symlink
$ ls -li foo bar baz
1449840 -rw-rw-r-- 2 penguin penguin 17 Oct 16 21:42 bar
1450180 lrwxrwxrwx 1 penguin penguin  3 Oct 16 21:47 baz -> foo
1449840 -rw-rw-r-- 2 penguin penguin 17 Oct 16 21:42 foo
$ rm foo
$ echo "New Content" > foo
$ ls -li foo bar baz
1449840 -rw-rw-r-- 1 penguin penguin 17 Oct 16 21:42 bar
1450180 lrwxrwxrwx 1 penguin penguin  3 Oct 16 21:47 baz -> foo
1450183 -rw-rw-r-- 1 penguin penguin 12 Oct 16 21:48 foo
$ cat bar
Original Content
$ cat baz
New Content
```

The hardlink can be made within the same filesystem and shares the same inode number which the `-i` option with `ls(1)` reveals.

The symlink always has nominal file access permissions of `"rwxrwxrwx"`, as shown in the above example, with the effective access permissions dictated by permissions of the file that it points to.

**Caution**

It is generally a good idea not to create complicated symbolic links or hardlinks at all unless you have a very good reason. It may cause nightmares where the logical combination of the symbolic links results in loops in the filesystem.

---

**Note**

It is generally preferable to use symbolic links rather than hardlinks unless you have a good reason for using a hardlink.

---

The `"."` directory links to the directory that it appears in, thus the link count of any new directory starts at 2. The `".."` directory links to the parent directory, thus the link count of the directory increases with the addition of new subdirectories.

If you are just moving to Linux from Windows, it soon becomes clear how well-designed the filename linking of Unix is, compared with the nearest Windows equivalent of "shortcuts". Because it is implemented in the filesystem, applications can't see any difference between a linked file and the original. In the case of hardlinks, there really is no difference.

### 1.2.8 Named pipes (FIFOs)

A [named pipe](#) is a file that acts like a pipe. You put something into the file, and it comes out the other end. Thus it's called a FIFO, or First-In-First-Out: the first thing you put in the pipe is the first thing to come out the other end.

If you write to a named pipe, the process which is writing to the pipe doesn't terminate until the information being written is read from the pipe. If you read from a named pipe, the reading process waits until there is nothing to read before terminating. The size of the pipe is always zero --- it does not store data, it just links two processes like the functionality offered by the shell `"|"` syntax. However, since this pipe has a name, the two processes don't have to be on the same command line or even be run by the same user. Pipes were a very influential innovation of Unix.

For example, try the following

---

```
$ cd; mkfifo mypipe
$ echo "hello" >mypipe & # put into background
[1] 8022
$ ls -l mypipe
prw-rw-r-- 1 penguin penguin 0 Oct 16 21:49 mypipe
$ cat mypipe
hello
[1]+  Done                  echo "hello" >mypipe
$ ls mypipe
mypipe
$ rm mypipe
```

### 1.2.9 Sockets

Sockets are used extensively by all the Internet communication, databases, and the operating system itself. It is similar to the named pipe (FIFO) and allows processes to exchange information even between different computers. For the socket, those processes do not need to be running at the same time nor to be running as the children of the same ancestor process. This is the endpoint for [the inter process communication \(IPC\)](#). The exchange of information may occur over the network between different hosts. The two most common ones are [the Internet socket](#) and [the Unix domain socket](#).

---

**Tip**

"ss -t -u -a" (from the `iproute2` package) provides a very useful overview of sockets that are open on a given system.

---

### 1.2.10 Device files

[Device files](#) refer to physical or virtual devices on your system, such as your hard disk, video card, screen, or keyboard. An example of a virtual device is the console, represented by `/dev/console`.

There are 2 types of device files.

- **Character device**

- Accessed one character at a time
- 1 character = 1 byte
- E.g. keyboard device, serial port, ...

- **Block device**

- accessed in larger units called blocks
- 1 block > 1 byte
- E.g. hard disk, ...

You can read and write device files, though the file may well contain binary data which may be an incomprehensible-to-humans gibberish. Writing data directly to these files is sometimes useful for the troubleshooting of hardware connections. For example, you can dump a text file to the printer device `/dev/lp0` or send modem commands to the appropriate serial port `/dev/ttyS0`. But, unless this is done carefully, it may cause a major disaster. So be cautious.

---

**Note**

For the normal access to a printer, use `lp(1)`.

---

The device node number are displayed by executing `ls(1)` as the following.

```
$ ls -l /dev/sda /dev/sr0 /dev/ttyS0 /dev/zero
brw-rw---T 1 root disk      8,  0 Oct 16 20:57 /dev/sda
brw-rw---T+ 1 root cdrom    11,  0 Oct 16 21:53 /dev/sr0
crw-rw---T 1 root dialout   4, 64 Oct 16 20:57 /dev/ttyS0
crw-rw-rw- 1 root root       1,  5 Oct 16 20:57 /dev/zero
```

- `"/dev/sda"` has the major device number 8 and the minor device number 0. This is read/write accessible by users belonging to the `disk` group.
- `"/dev/sr0"` has the major device number 11 and the minor device number 0. This is read/write accessible by users belonging to the `cdrom` group.
- `"/dev/ttyS0"` has the major device number 4 and the minor device number 64. This is read/write accessible by users belonging to the `dialout` group.
- `"/dev/zero"` has the major device number 1 and the minor device number 5. This is read/write accessible by anyone.

On the modern Linux system, the filesystem under `"/dev/"` is automatically populated by the `udev(7)` mechanism.

### 1.2.11 Special device files

There are some special device files.

| device file               | action | description of response  |
|---------------------------|--------|--|
| <code>/dev/null</code>    | read   | return "end-of-file (EOF) character"   |
| <code>/dev/null</code>    | write  | return nothing (a bottomless data dump pit)  |
| <code>/dev/zero</code>    | read   | return "the <code>\0</code> (NUL) character" (not the same as the number zero ASCII)         |
| <code>/dev/random</code>  | read   | return random characters from a true random number generator, delivering real entropy (slow) |
| <code>/dev/urandom</code> | read   | return random characters from a cryptographically secure pseudorandom number generator       |
| <code>/dev/full</code>    | write  | return the disk-full (ENOSPC) error  |

Table 1.10: List of special device files

These are frequently used in conjunction with the shell redirection (see Section [1.5.8](#)).

### 1.2.12 `procfs` and `sysfs`

The `procfs` and `sysfs` mounted on `"/proc"` and `"/sys"` are the pseudo-filesystem and expose internal data structures of the kernel to the userspace. In other word, these entries are virtual, meaning that they act as a convenient window into the operation of the operating system.

The directory `"/proc"` contains (among other things) one subdirectory for each process running on the system, which is named after the process ID (PID). System utilities that access process information, such as `ps(1)`, get their information from this directory structure.

The directories under `"/proc/sys/"` contain interfaces to change certain kernel parameters at run time. (You may do the same through the specialized `sysctl(8)` command or its preload/configuration file `"/etc/sysctl.d/* .conf"`.)

People frequently panic when they notice one file in particular - `"/proc/kcore"` - which is generally huge. This is (more or less) a copy of the content of your computer's memory. It's used to debug the kernel. It is a virtual file that points to computer memory, so don't worry about its size.

The directory under `"/sys"` contains exported kernel data structures, their attributes, and their linkages between them. It also contains interfaces to change certain kernel parameters at run time.

See `"proc.txt(.gz)"`, `"sysfs.txt(.gz)"` and other related documents in the Linux kernel documentation (`"/usr/share/doc/linux-doc-*/Documentation/filesystems"`) provided by the `linux-doc-*` package.

### 1.2.13 tmpfs

The `tmpfs` is a temporary filesystem which keeps all files in the [virtual memory](#). The data of the `tmpfs` in the [page cache](#) on memory may be swapped out to the [swap space](#) on disk as needed.

The directory `"/run"` is mounted as the `tmpfs` in the early boot process. This enables writing to it even when the directory `"/"` is mounted as read-only. This is the new location for the storage of transient state files and replaces several locations described in the [Filesystem Hierarchy Standard](#) version 2.3:

- `"/var/run" → "/run"`
- `"/var/lock" → "/run/lock"`
- `"/dev/shm" → "/run/shm"`

See `"tmpfs.txt(.gz)"` in the Linux kernel documentation (`"/usr/share/doc/linux-doc-*/Documentation/filesystems"`) provided by the `linux-doc-*` package.

## 1.3 Midnight Commander (MC)

[Midnight Commander \(MC\)](#) is a GNU "Swiss army knife" for the Linux console and other terminal environments. This gives newbie a menu driven console experience which is much easier to learn than standard Unix commands.

You may need to install the Midnight Commander package which is titled `"mc"` by the following.

```
$ sudo apt-get install mc
```

Use the `mc(1)` command to explore the Debian system. This is the best way to learn. Please explore few interesting locations just using the cursor keys and Enter key.

- `"/etc"` and its subdirectories
- `"/var/log"` and its subdirectories
- `"/usr/share/doc"` and its subdirectories
- `"/usr/sbin"` and `"/usr/bin"`

### 1.3.1 Customization of MC

In order to make MC to change working directory upon exit and `cd` to the directory, I suggest to modify `"~/.bashrc"` to include a script provided by the `mc` package.

```
. /usr/lib/mc/mc.sh
```

See `mc(1)` (under the `"-P"` option) for the reason. (If you do not understand what exactly I am talking here, you can do this later.)

---

### 1.3.2 Starting MC

MC can be started by the following.

```
$ mc
```

MC takes care of all file operations through its menu, requiring minimal user effort. Just press F1 to get the help screen. You can play with MC just by pressing cursor-keys and function-keys.

---

#### Note

In some consoles such as `gnome-terminal(1)`, key strokes of function-keys may be stolen by the console program. You can disable these features in "Preferences" → "General" and "Shortcuts" menu for `gnome-terminal`.

---

If you encounter character encoding problem which displays garbage characters, adding "-a" to MC's command line may help prevent problems.

If this doesn't clear up your display problems with MC, see [Section 8.3.1](#).

### 1.3.3 File manager in MC

The default is two directory panels containing file lists. Another useful mode is to set the right window to "information" to see file access privilege information, etc. Following are some essential keystrokes. With the `gpm(8)` daemon running, one can use a mouse on Linux character consoles, too. (Make sure to press the shift-key to obtain the normal behavior of cut and paste in MC.)

| key              | key binding   |
|------------------|---|
| F1               | help menu   |
| F3               | internal file viewer                                  |
| F4               | internal editor                                       |
| F9               | activate pull down menu                               |
| F10              | exit Midnight Commander                               |
| Tab              | move between two windows                              |
| Insert or Ctrl-T | mark file for a multiple-file operation such as copy  |
| Del              | delete file (be careful---set MC to safe delete mode) |
| Cursor keys      | self-explanatory                                      |

Table 1.11: The key bindings of MC

### 1.3.4 Command-line tricks in MC

- `cd` command changes the directory shown on the selected screen.
  - `Ctrl-Enter` or `Alt-Enter` copies a filename to the command line. Use this with `cp(1)` and `mv(1)` commands together with command-line editing.
  - `Alt-Tab` shows shell filename expansion choices.
  - One can specify the starting directory for both windows as arguments to MC; for example, "`mc /etc /root`".
  - `Esc + n-key` → `Fn` (i.e., `Esc + 1` → `F1`, etc.; `Esc + 0` → `F10`)
  - Pressing `Esc` before the key has the same effect as pressing the `Alt` and the key together.; i.e., type `Esc + c` for `Alt-C`. `Esc` is called meta-key and sometimes noted as "M-".
-

### 1.3.5 The internal editor in MC

The internal editor has an interesting cut-and-paste scheme. Pressing F3 marks the start of a selection, a second F3 marks the end of selection and highlights the selection. Then you can move your cursor. If you press F6, the selected area is moved to the cursor location. If you press F5, the selected area is copied and inserted at the cursor location. F2 saves the file. F10 gets you out. Most cursor keys work intuitively.

This editor can be directly started on a file using one of the following commands.

```
$ mc -e filename_to_edit
```

```
$ mcedit filename_to_edit
```

This is not a multi-window editor, but one can use multiple Linux consoles to achieve the same effect. To copy between windows, use Alt-Fn keys to switch virtual consoles and use "File → Insert file" or "File → Copy to file" to move a portion of a file to another file.

This internal editor can be replaced with any external editor of choice.

Also, many programs use the environment variables "\$EDITOR" or "\$VISUAL" to decide which editor to use. If you are uncomfortable with vim(1) or nano(1) initially, you may set these to "mcedit" by adding the following lines to "~/.bashrc".

```
export EDITOR=mcedit
export VISUAL=mcedit
```

I do recommend setting these to "vim" if possible.

If you are uncomfortable with vim(1), you can keep using mcedit(1) for most system maintenance tasks.

### 1.3.6 The internal viewer in MC

MC is a very smart viewer. This is a great tool for searching words in documents. I always use this for files in the "/usr/share/doc" directory. This is the fastest way to browse through masses of Linux information. This viewer can be directly started using one of the following commands.

```
$ mc -v path/to/filename_to_view
```

```
$ mcview path/to/filename_to_view
```

### 1.3.7 Auto-start features of MC

Press Enter on a file, and the appropriate program handles the content of the file (see Section 9.4.11). This is a very convenient MC feature.

| file type                   | reaction to enter key                  |
|-----------------------------|--|
| executable file             | execute command                        |
| man file                    | pipe content to viewer software        |
| html file                   | pipe content to web browser            |
| "*.tar.gz" and "*.deb" file | browse its contents as if subdirectory |

Table 1.12: The reaction to the enter key in MC

In order to allow these viewer and virtual file features to function, viewable files should not be set as executable. Change their status using chmod(1) or via the MC file menu.

### 1.3.8 Virtual filesystem of MC

MC can be used to access files over the Internet. Go to the menu by pressing F9, "Enter" and "h" to activate the Shell filesystem. Enter a URL in the form "sh://[user@]machine[:options]/[remote-dir]", which retrieves a remote directory that appears like a local one using ssh.

## 1.4 The basic Unix-like work environment

Although MC enables you to do almost everything, it is very important for you to learn how to use the command line tools invoked from the shell prompt and become familiar with the Unix-like work environment.

### 1.4.1 The login shell

Since the login shell may be used by some system initialization programs, it is prudent to keep it as `bash(1)` and avoid switching the login shell with `chsh(1)`.

If you want to use a different interactive shell prompt, set it from GUI terminal emulator configuration or start it from `~/.bashrc`, e.g., by placing `exec /usr/bin/zsh -i -l` or `exec /usr/bin/fish -i -l` in it.

| package                         | popcon         | size | POSIX shell | description  |
|---------------------------------|----------------|------|-------------|--|
| <a href="#">bash</a>            | V:888, I:999   | 7276 | Yes         | <a href="#">Bash</a> : the GNU Bourne Again SHell (de facto standard)                                      |
| <a href="#">bash-completion</a> | V:36, I:958    | 1952 | N/A         | programmable completion for the <a href="#">bash</a> shell   |
| <a href="#">dash</a>            | V:928, I:998   | 207  | Yes         | Debian <a href="#">Almquist Shell</a> , good for shell script  |
| <a href="#">zsh</a>             | V:40, I:70     | 2499 | Yes         | <a href="#">Z shell</a> : the standard shell with many enhancements  |
| <a href="#">tcsh</a>            | V:4, I:15      | 1366 | No          | <a href="#">TENEX C Shell</a> : an enhanced version of <a href="#">Berkeley csh</a>                        |
| <a href="#">mksh</a>            | V:5.4, I:7.9   | 7713 | Yes         | A version of the <a href="#">Korn shell</a>  |
| <a href="#">csh</a>             | V:1.0, I:5.4   | 348  | No          | <a href="#">OpenBSD C Shell</a> , a version of <a href="#">Berkeley csh</a>                                |
| <a href="#">sash</a>            | V:0.3, I:5.2   | 1245 | Yes         | <a href="#">Stand-alone shell</a> with builtin commands (Not meant for standard <code>/usr/bin/sh</code> ) |
| <a href="#">ksh</a>             | V:0.3, I:8.4   | 65   | Yes         | the real, AT&T version of the <a href="#">Korn shell</a>   |
| <a href="#">rc</a>              | V:0.10, I:0.74 | 182  | No          | implementation of the <a href="#">AT&amp;T Plan 9 rc shell</a>   |
| <a href="#">posh</a>            | V:0.01, I:0.23 | 191  | Yes         | Policy-compliant Ordinary SHell (pdksh derivative)   |

Table 1.13: List of shell programs

#### Tip

Although POSIX-like shells share the basic syntax, they can differ in behavior for things as basic as shell variables and glob expansions. Please check their documentation for details.

In this tutorial chapter, the interactive shell always means `bash`.

## 1.4.2 Customizing bash

You can customize bash(1) behavior by "`~/.bashrc`".

For example, try the following.

```
# enable bash-completion
if ! shopt -oq posix; then
  if [ -f /usr/share/bash-completion/bash_completion ]; then
    . /usr/share/bash-completion/bash_completion
  elif [ -f /etc/bash_completion ]; then
    . /etc/bash_completion
  fi
fi

# CD upon exiting MC
. /usr/lib/mc/mc.sh

# set CDPATH to a good one
CDPATH=./usr/share/doc:~::~/Desktop:~
export CDPATH

PATH="${PATH+$PATH:}/usr/sbin:/sbin"
# set PATH so it includes user's private bin if it exists
if [ -d ~/bin ] ; then
  PATH="~/bin${PATH+:$PATH}"
fi
export PATH

EDITOR=vim
export EDITOR
```

---

**Tip**

You can find more bash customization tips, such as [Section 9.3.6](#), in [Chapter 9](#).

---

---

**Tip**

The `bash-completion` package enables programmable completion for bash.

---

## 1.4.3 Special key strokes

In the [Unix-like](#) environment, there are few key strokes which have special meanings. Please note that on a normal Linux character console, only the left-hand `Ctrl` and `Alt` keys work as expected. Here are few notable key strokes to remember.

---

**Tip**

The terminal feature of `Ctrl-S` can be disabled using `stty(1)`.

---

## 1.4.4 Mouse operations

[Mouse operations for text on Debian system mix 2 styles](#) with some twists:

- Traditional Unix style mouse operations:
-



| key                                    | description of key binding                                    |
|--|---|
| Ctrl-U                                 | erase line before cursor                                      |
| Ctrl-H                                 | erase a character before cursor                               |
| Ctrl-D                                 | terminate input (exit shell if you are using shell)           |
| Ctrl-C                                 | terminate a running program                                   |
| Ctrl-Z                                 | temporarily stop program by moving it to the background job   |
| Ctrl-S                                 | halt output to screen   |
| Ctrl-Q                                 | reactivate output to screen                                   |
| Ctrl-Alt-Del                           | reboot/halt the system, see <code>inittab(5)</code>           |
| Left-Alt-key (optionally, Windows-key) | meta-key for Emacs and the similar UI                         |
| Up-arrow                               | start command history search under bash                       |
| Ctrl-R                                 | start incremental command history search under bash           |
| Tab                                    | complete input of the filename to the command line under bash |
| Ctrl-V Tab                             | input Tab without expansion to the command line under bash    |

Table 1.14: List of key bindings for bash

- use 3 buttons (click)
- use PRIMARY
- used by X applications such as `xterm` and text applications in Linux console
- Modern GUI style mouse operations:
  - use 2 buttons (drag + click)
  - use PRIMARY and CLIPBOARD
  - used in Modern GUI applications such as `gnome-terminal`

| action                            | response  |
|-----------------------------------|---|
| Left-click-and-drag mouse         | select range as PRIMARY selection               |
| Left-click                        | select the start of range for PRIMARY selection |
| Right-click (traditional)         | select the end of range for PRIMARY selection   |
| Right-click (modern)              | context dependent menu (cut/copy/paste)         |
| Middle-click or Shift-Ins         | insert PRIMARY selection at the cursor          |
| Ctrl-X                            | cut PRIMARY selection to CLIPBOARD              |
| Ctrl-C (Shift-Ctrl-C in terminal) | copy PRIMARY selection to CLIPBOARD             |
| Ctrl-V                            | paste CLIPBOARD at the cursor                   |

Table 1.15: List of mouse operations and related key actions on Debian

Here, the PRIMARY selection is the highlighted text range. Within the terminal program, `Shift-Ctrl-C` is used instead to avoid terminating a running program.

The center wheel on the modern wheel mouse is considered middle mouse button and can be used for middle-click. Clicking left and right mouse buttons together serves as the middle-click under the 2 button mouse system situation.

In order to use a mouse in Linux character consoles, you need to have `gpm(8)` running as daemon.

### 1.4.5 The pager

The `less(1)` command is the enhanced pager (file content browser). It reads the file specified by its command argument or its standard input. Hit "h" if you need help while browsing with the `less` command. It can do much more than `more(1)` and can be supercharged by executing `eval $(lesspipe)"` or `eval $(lessfile)"` in the shell startup script. See more in `/usr/share/doc/less/LESSOPEN`. The "-R" option allows raw character output and enables ANSI color escape sequences. See `less(1)`.

---

**Tip**

In the `less` command, type `"h"` to see the help screen, type `"/"` or `"?"` to search a string, and type `"-i"` to the change case sensitivity.

---

### 1.4.6 The text editor

You should become proficient in one of variants of [Vim](#) or [Emacs](#) programs which are popular in the Unix-like system.

I think getting used to Vim commands is the right thing to do, since Vi-editor is always there in the Linux/Unix world. (Actually, original `vi` or new `nvi` are programs you find everywhere. I choose Vim instead for newbie since it offers you help through F1 key while it is similar enough and more powerful.)

If you choose either [Emacs](#) or [XEmacs](#) instead as your choice of the editor, that is another good choice indeed, particularly for programming. Emacs has a plethora of other features as well, including functioning as a newsreader, directory editor, mail program, etc. When used for programming or editing shell scripts, it intelligently recognizes the format of what you are working on, and tries to provide assistance. Some people maintain that the only program they need on Linux is Emacs. Ten minutes learning Emacs now can save hours later. Having the GNU Emacs manual for reference when learning Emacs is highly recommended.

All these programs usually come with tutoring program for you to learn them by practice. Start Vim by typing `"vim"` and press F1-key. You should at least read the first 35 lines. Then do the online training course by moving cursor to `"| tutor |"` and pressing `Ctrl-]`.

---

**Note**

Good editors, such as Vim and Emacs, can handle UTF-8 and other exotic encoding texts correctly. It is a good idea to use the GUI environment in the UTF-8 locale and to install required programs and fonts to it. Editors have options to set the file encoding independent of the GUI environment. Please refer to their documentation on multibyte text.

---

### 1.4.7 Setting a default text editor

Debian comes with a number of different editors. We recommend to install the `vim` package, as mentioned above.

Debian provides unified access to the system default editor via command `"/usr/bin/editor"` so other programs (e.g., `reportbug(1)`) can invoke it. You can change it by the following.

```
$ sudo update-alternatives --config editor
```

The choice `"/usr/bin/vim.basic"` over `"/usr/bin/vim.tiny"` is my recommendation for newbies since it supports syntax highlighting.

---

**Tip**

Many programs use the environment variables `"$EDITOR"` or `"$VISUAL"` to decide which editor to use (see [Section 1.3.5](#) and [Section 9.4.11](#)). For the consistency on the Debian system, set these to `"/usr/bin/editor"`. (Historically, `"$EDITOR"` was `"ed"` and `"$VISUAL"` was `"vi"`.)

---

### 1.4.8 Using vim

The recent `vim(1)` starts itself in the sane `"nocompatible"` option and enters into the NORMAL mode.<sup>1</sup>

Please use the `"vimtutor"` program to learn vim through an interactive tutorial course.

---

<sup>1</sup>Even the older `vim` can starts in the sane `"nocompatible"` mode by starting it with the `"-N"` option.

---

| mode                  | key strokes                 | action  |
|-----------------------|-----------------------------|---|
| NORMAL                | :help only                  | display the help file                         |
| NORMAL                | :e filename.ext             | open new buffer to edit filename.ext          |
| NORMAL                | :w                          | overwrite current buffer to the original file |
| NORMAL                | :w filename.ext             | write current buffer to filename.ext          |
| NORMAL                | :q                          | quit vim                                      |
| NORMAL                | :q!                         | force to quit vim                             |
| NORMAL                | :only                       | close all other split open windows            |
| NORMAL                | :set nocompatible?          | check if vim is in the sane nocompatible mode |
| NORMAL                | :set nocompatible           | set vim to the sane nocompatible mode         |
| NORMAL                | i                           | enter the INSERT mode                         |
| NORMAL                | R                           | enter the REPLACE mode                        |
| NORMAL                | v                           | enter the VISUAL mode                         |
| NORMAL                | V                           | enter the linewise VISUAL mode                |
| NORMAL                | Ctrl-V                      | enter the blockwise VISUAL mode               |
| except TERMINAL - JOB | ESC-key                     | enter the NORMAL mode                         |
| NORMAL                | :term                       | enter the TERMINAL - JOB mode                 |
| TERMINAL - NORMAL     | i                           | enter the TERMINAL - JOB mode                 |
| TERMINAL - JOB        | Ctrl-W N (or Ctrl-\ Ctrl-N) | enter the TERMINAL - NORMAL mode              |
| TERMINAL - JOB        | Ctrl-W :                    | enter the Ex-mode in TERMINAL - NORMAL mode   |

Table 1.16: List of basic Vim key strokes

The vim program changes its behavior to typed key strokes based on **mode**. Typing in key strokes to the buffer is mostly done in INSERT-mode and REPLACE-mode. Moving cursor is mostly done in NORMAL-mode. Interactive selection is done in VISUAL-mode. Typing ":" in NORMAL-mode changes its **mode** to Ex-mode. Ex-mode accepts commands.

**Tip**

The Vim comes with the **Netrw** package. Netrw supports reading files, writing files, browsing directories over a network, and local browsing! Try Netrw with "vim ." (a period as the argument) and read its manual at ":help netrw".

For the advanced configuration of vim, see Section 9.2.

### 1.4.9 Recording the shell activities

The output of the shell command may roll off your screen and may be lost forever. It is a good practice to log shell activities into the file for you to review them later. This kind of record is essential when you perform any system administration tasks.

**Tip**

The new Vim (version>=8.2) can be used to record the shell activities cleanly using TERMINAL - JOB-mode. See Section 1.4.8.

The basic method of recording the shell activity is to run it under script(1).

For example, try the following

```
$ script
Script started, file is typescript
```

Do whatever shell commands under `script`.

Press `Ctrl-D` to exit `script`.

```
$ vim typescript
```

See Section [9.1.1](#) .

### 1.4.10 Basic Unix commands

Let's learn basic Unix commands. Here I use "Unix" in its generic sense. Any Unix clone OSs usually offer equivalent commands. The Debian system is no exception. Do not worry if some commands do not work as you wish now. If `alias` is used in the shell, its corresponding command outputs are different. These examples are not meant to be executed in this order.

Try all following commands from the non-privileged user account.

---

#### Note

Unix has a tradition to hide filenames which start with `."`. They are traditionally files that contain configuration information and user preferences.

For `cd` command, see `builtins(7)`.

The default pager of the bare bone Debian system is `more(1)` which cannot scroll back. By installing the `less` package using command line `"apt-get install less"`, `less(1)` becomes default pager and you can scroll back with cursor keys.

The `"["` and `"]"` in the regular expression of the `"ps aux | grep -e "[e]xim4*"` command above enable `grep` to avoid matching itself. The `"4*"` in the regular expression means 0 or more repeats of character `"4"` thus enables `grep` to match both `"exim"` and `"exim4"`. Although `"*"` is used in the shell filename glob and the regular expression, their meanings are different. Learn the regular expression from `grep(1)`.

---

Please traverse directories and peek into the system using the above commands as training. If you have questions on any of console commands, please make sure to read the manual page.

For example, try the following

```
$ man man
$ man bash
$ man builtins
$ man grep
$ man ls
```

The style of man pages may be a little hard to get used to, because they are rather terse, particularly the older, very traditional ones. But once you get used to it, you come to appreciate their succinctness.

Please note that many Unix-like commands including ones from GNU and BSD display brief help information if you invoke them in one of the following ways (or without any arguments in some cases).

```
$ commandname --help
$ commandname -h
```

## 1.5 The simple shell command

Now you have some feel on how to use the Debian system. Let's look deep into the mechanism of the command execution in the Debian system. Here, I have simplified reality for the newbie. See `bash(1)` for the exact explanation.

A simple command is a sequence of components.

---

| command                                 | description   |
|---|---|
| <code>pwd</code>                        | display name of current/working directory   |
| <code>whoami</code>                     | display current user name   |
| <code>id</code>                         | display current user identity (name, uid, gid, and associated groups)   |
| <code>file foo</code>                   | display a type of file for the file " <i>foo</i> "  |
| <code>type -p commandname</code>        | display a file location of command " <i>commandname</i> "   |
| <code>which commandname</code>          | , ,   |
| <code>type commandname</code>           | display information on command " <i>commandname</i> "   |
| <code>apropos key-word</code>           | find commands related to " <i>key-word</i> "  |
| <code>man -k key-word</code>            | , ,   |
| <code>whatis commandname</code>         | display one line explanation on command " <i>commandname</i> "  |
| <code>man -a commandname</code>         | display explanation on command " <i>commandname</i> " (Unix style)  |
| <code>info commandname</code>           | display rather long explanation on command " <i>commandname</i> " (GNU style)   |
| <code>ls</code>                         | list contents of directory (non-dot files and directories)  |
| <code>ls -a</code>                      | list contents of directory (all files and directories)  |
| <code>ls -A</code>                      | list contents of directory (almost all files and directories, i.e., skip ". ." and ". ")  |
| <code>ls -la</code>                     | list all contents of directory with detail information  |
| <code>ls -lai</code>                    | list all contents of directory with inode number and detail information   |
| <code>ls -d</code>                      | list all directories under the current directory  |
| <code>tree</code>                       | display file tree contents  |
| <code>lsof foo</code>                   | list open status of file " <i>foo</i> "   |
| <code>lsof -p pid</code>                | list files opened by the process ID: " <i>pid</i> "   |
| <code>mkdir foo</code>                  | make a new directory " <i>foo</i> " in the current directory  |
| <code>rmdir foo</code>                  | remove a directory " <i>foo</i> " in the current directory  |
| <code>cd foo</code>                     | change directory to the directory " <i>foo</i> " in the current directory or in the directory listed in the variable "\$CDPATH"   |
| <code>cd /</code>                       | change directory to the root directory  |
| <code>cd</code>                         | change directory to the current user's home directory   |
| <code>cd /foo</code>                    | change directory to the absolute path directory " <i>/foo</i> "   |
| <code>cd ..</code>                      | change directory to the parent directory  |
| <code>cd ~foo</code>                    | change directory to the home directory of the user " <i>foo</i> "   |
| <code>cd -</code>                       | change directory to the previous directory  |
| <code>&lt;/etc/motd pager</code>        | display contents of " <i>/etc/motd</i> " using the default pager  |
| <code>touch junkfile</code>             | create a empty file " <i>junkfile</i> "   |
| <code>cp foo bar</code>                 | copy a existing file " <i>foo</i> " to a new file " <i>bar</i> "  |
| <code>rm junkfile</code>                | remove a file " <i>junkfile</i> "   |
| <code>mv foo bar</code>                 | rename an existing file " <i>foo</i> " to a new name " <i>bar</i> " (" <i>bar</i> " must not exist)   |
| <code>mv foo bar</code>                 | move an existing file " <i>foo</i> " to a new location " <i>bar/foo</i> " (the directory " <i>bar</i> " must exist)   |
| <code>mv foo bar/baz</code>             | move an existing file " <i>foo</i> " to a new location with a new name " <i>bar/baz</i> " (the directory " <i>bar</i> " must exist but the directory " <i>bar/baz</i> " must not exist) |
| <code>chmod 600 foo</code>              | make an existing file " <i>foo</i> " to be non-readable and non-writable by the other people (non-executable for all)   |
| <code>chmod 644 foo</code>              | make an existing file " <i>foo</i> " to be readable but non-writable by the other people (non-executable for all)   |
| <code>chmod 755 foo</code>              | make an existing file " <i>foo</i> " to be readable but non-writable by the other people (executable for all)   |
| <code>find . -name pattern</code>       | find matching filenames using shell " <i>pattern</i> " (slower)   |
| <code>locate -d . pattern</code>        | find matching filenames using shell " <i>pattern</i> " (quicker using regularly generated database)   |
| <code>grep -e "pattern" *.html</code>   | find a " <i>pattern</i> " in all files ending with ".html" in current directory and display them all  |
| <code>top</code>                        | display process information using full screen, type "q" to quit   |
| <code>ps aux   pager</code>             | display information on all the running processes using BSD style output   |
| <code>ps -ef   pager</code>             | display information on all the running processes using Unix system-V style output   |
| <code>ps aux   grep -e "rexim4*"</code> | display all processes running " <i>exim</i> " and " <i>exim4</i> "  |

1. Variable assignments (optional)
2. Command name
3. Arguments (optional)
4. Redirections (optional: > , >> , < , << , etc.)
5. Control operator (optional: && , || , *newline* , ; , & , ( , ) )

### 1.5.1 Command execution and environment variable

The values of some [environment variables](#) change the behavior of some Unix commands.

Default values of environment variables are initially set by the PAM system and then some of them may be reset by some application programs.

- The PAM system such as `pam_env` may set environment variables by `/etc/pam.conf`, `/etc/environment` and `/etc/default/locale`.
- The display manager such as `gdm3` may reset environment variables for GUI session by `~/.profile`.
- The user specific program initialization may reset environment variables by `~/.profile`, `~/.bash_profile` and `~/.bashrc`.

### 1.5.2 The "\$LANG" variable

The default locale is defined in the "\$LANG" environment variable and is configured as "LANG=xx\_YY.UTF-8" by the installer or by the subsequent GUI configuration, e.g., "Settings" → "Region & Language" → "Language" / "Formats" for GNOME.

---

#### Note

I recommend you to configure the system environment just by the "\$LANG" variable for now and to stay away from "\$LC\_\*" variables unless it is absolutely needed.

---

The full locale value given to "\$LANG" variable consists of 3 parts: "xx\_YY.ZZZZ".

| locale value | meaning  |
|--------------|--|
| xx           | <a href="#">ISO 639 language codes (lower case)</a> such as "en" |
| YY           | <a href="#">ISO 3166 country codes (upper case)</a> such as "US" |
| ZZZZ         | <a href="#">codeset</a> , always set to "UTF-8"                  |

Table 1.18: The 3 parts of locale value

Typical command execution uses a shell line sequence as the following.

```
$ echo $LANG
en_US.UTF-8
$ date -u
Wed 19 May 2021 03:18:43 PM UTC
$ LANG=fr_FR.UTF-8 date -u
mer. 19 mai 2021 15:19:02 UTC
```

Here, the program `date(1)` is executed with different locale values.

---

| locale recommendation | Language (area)            |
|-----------------------|----------------------------|
| en_US.UTF-8           | English (USA)              |
| en_GB.UTF-8           | English (Great Britain)    |
| fr_FR.UTF-8           | French (France)            |
| de_DE.UTF-8           | German (Germany)           |
| it_IT.UTF-8           | Italian (Italy)            |
| es_ES.UTF-8           | Spanish (Spain)            |
| ca_ES.UTF-8           | Catalan (Spain)            |
| sv_SE.UTF-8           | Swedish (Sweden)           |
| pt_BR.UTF-8           | Portuguese (Brazil)        |
| ru_RU.UTF-8           | Russian (Russia)           |
| zh_CN.UTF-8           | Chinese (P.R. of China)    |
| zh_TW.UTF-8           | Chinese (Taiwan R.O.C.)    |
| ja_JP.UTF-8           | Japanese (Japan)           |
| ko_KR.UTF-8           | Korean (Republic of Korea) |
| vi_VN.UTF-8           | Vietnamese (Vietnam)       |

Table 1.19: List of locale recommendations

- For the first command, "\$LANG" is set to the system default [locale](#) value "en\_US.UTF-8".
- For the second command, "\$LANG" is set to the French UTF-8 [locale](#) value "fr\_FR.UTF-8".

Most command executions usually do not have preceding environment variable definition. For the above example, you can alternatively execute as the following.

```
$ LANG=fr_FR.UTF-8
$ date -u
mer. 19 mai 2021 15:19:24 UTC
```

---

#### Tip

When filing a bug report, running and checking the command under "en\_US.UTF-8" locale is a good idea if you use non-English environment.

---

For fine details of the locale configuration, see [Section 8.1](#).

### 1.5.3 The "\$PATH" variable

When you type a command into the shell, the shell searches the command in the list of directories contained in the "\$PATH" environment variable. The value of the "\$PATH" environment variable is also called the shell's search path.

In the default Debian installation, the "\$PATH" environment variable of user accounts may not include "/usr/sbin" and "/usr/bin". For example, the `ifconfig` command needs to be issued with full path as `/usr/sbin/ifconfig`. (Similar `ip` command is located in `/usr/bin`.)

You can change the "\$PATH" environment variable of Bash shell by `~/ .bash_profile` or `~/ .bashrc` files.

### 1.5.4 The "\$HOME" variable

Many commands stores user specific configuration in the home directory and changes their behavior by their contents. The home directory is identified by the environment variable "\$HOME".

---

| value of "\$HOME" | program execution situation                       |
|-------------------|---|
| /                 | program run by the init process (daemon)          |
| /root             | program run from the normal root shell            |
| /home/normal_user | program run from the normal user shell            |
| /home/normal_user | program run from the normal user GUI desktop menu |
| /home/normal_user | program run as root with "sudo program"           |
| /root             | program run as root with "sudo -H program"        |

Table 1.20: List of "\$HOME" values

**Tip**

Shell expands "~/" to current user's home directory, i.e., "\$HOME/". Shell expands "~foo/" to foo's home directory, i.e., "/home/foo/".

See Section [12.1.5](#) if \$HOME isn't available for your program.

## 1.5.5 Command line options

Some commands take arguments. Arguments starting with "-" or "--" are called options and control the behavior of the command.

```
$ date
Thu 20 May 2021 01:08:08 AM JST
$ date -R
Thu, 20 May 2021 01:08:12 +0900
```

Here the command-line argument "-R" changes date(1) behavior to output [RFC2822](#) compliant date string.

## 1.5.6 Shell glob

Often you want a command to work with a group of files without typing all of them. The filename expansion pattern using the shell **glob**, (sometimes referred as **wildcards**), facilitate this need.

| shell glob pattern | description of match rule   |
|--------------------|---|
| *                  | filename (segment) not started with "."   |
| .*                 | filename (segment) started with "."   |
| ?                  | exactly one character   |
| [...]              | exactly one character with any character enclosed in brackets                       |
| [a-z]              | exactly one character with any character between "a" and "z"                        |
| [^...]             | exactly one character other than any character enclosed in brackets (excluding "^") |

Table 1.21: Shell glob patterns

For example, try the following

```
$ mkdir junk; cd junk; touch 1.txt 2.txt 3.c 4.h .5.txt ..6.txt
$ echo *.txt
1.txt 2.txt
$ echo *
1.txt 2.txt 3.c 4.h
$ echo *.hc]
```



```
3.c 4.h
$ echo .*
. .5.txt ..6.txt
$ echo .*[^.]*
.5.txt ..6.txt
$ echo [^1-3]*
4.h
$ cd ../; rm -rf junk
```

See `glob(7)`.

---

**Note**  
Unlike normal filename expansion by the shell, the shell pattern `"**"` tested in `find(1)` with `"-name"` test etc., matches the initial `"."` of the filename. (New [POSIX](#) feature)

---

---

**Note**  
BASH can be tweaked to change its glob behavior with its shopt builtin options such as `"dotglob"`, `"noglob"`, `"nocaseglob"`, `"nullglob"`, `"extglob"`, etc. See `bash(1)`.

---

1.5.7 Return value of the command

Each command returns its exit status (variable: `"$?"`) as the return value.

| command exit status | numeric return value | logical return value |
|---------------------|----------------------|----------------------|
| success             | zero, 0              | <b>TRUE</b>          |
| error               | non-zero, -1         | <b>FALSE</b>         |

Table 1.22: Command exit codes

For example, try the following.

```
$ [ 1 = 1 ] ; echo $?
0
$ [ 1 = 2 ] ; echo $?
1
```

---

**Note**  
Please note that, in the logical context for the shell, **success** is treated as the logical **TRUE** which has 0 (zero) as its value. This is somewhat non-intuitive and needs to be reminded here.

---

1.5.8 Typical command sequences and shell redirection

Let's try to remember following shell command idioms typed in one line as a part of shell command.

The Debian system is a multi-tasking system. Background jobs allow users to run multiple programs in a single shell. The management of the background process involves the shell builtins: `jobs`, `fg`, `bg`, and `kill`. Please read sections of `bash(1)` under `"SIGNALS"`, and `"JOB CONTROL"`, and `builtins(1)`.

For example, try the following

```
$ </etc/motd pager
```

| command idiom            | description  |
|--------------------------|--|
| command &                | <b>background</b> execution of command in the subshell   |
| command1   command2      | <b>pipe</b> the standard output of command1 to the standard input of command2 ( <b>concurrent</b> execution)   |
| command1 2>&1   command2 | <b>pipe</b> both standard output and standard error of command1 to the standard input of command2 ( <b>concurrent</b> execution)                             |
| command1 ; command2      | execute command1 and command2 <b>sequentially</b>  |
| command1 && command2     | execute command1; if successful, execute command2 <b>sequentially</b> (return success if both command1 <b>and</b> command2 are successful)                   |
| command1    command2     | execute command1; if not successful, execute command2 <b>sequentially</b> (return success if command1 <b>or</b> command2 are successful)                     |
| command > foo            | redirect standard output of command to a file foo (overwrite)  |
| command 2> foo           | redirect standard error of command to a file foo (overwrite)   |
| command >> foo           | redirect standard output of command to a file foo (append)   |
| command 2>> foo          | redirect standard error of command to a file foo (append)  |
| command > foo 2>&1       | redirect both standard output and standard error of command to a file foo  |
| command < foo            | redirect standard input of command to a file foo   |
| command << delimiter     | redirect standard input of command to the following lines until "delimiter" is met (here document)   |
| command <<- delimiter    | redirect standard input of command to the following lines until "delimiter" is met (here document, the leading tab characters are stripped from input lines) |

Table 1.23: Shell command idioms

```
$ pager </etc/motd
```

```
$ pager /etc/motd
```

```
$ cat /etc/motd | pager
```

Although all 4 examples of shell redirections display the same thing, the last example runs an extra `cat` command and wastes resources with no reason.

The shell allows you to open files using the `exec` builtin with an arbitrary file descriptor.

```
$ echo Hello >foo
$ exec 3<foo 4>bar # open files
$ cat <&3 >&4       # redirect stdin to 3, stdout to 4
$ exec 3<&- 4>&-   # close files
$ cat bar
Hello
```

The file descriptor 0-2 are predefined.

| device | description     | file descriptor |
|--------|-----------------|-----------------|
| stdin  | standard input  | 0               |
| stdout | standard output | 1               |
| stderr | standard error  | 2               |

Table 1.24: Predefined file descriptors

### 1.5.9 Command alias

You can set an alias for the frequently used command.

For example, try the following

```
$ alias la='ls -la'
```

Now, "la" works as a short hand for "ls -la" which lists all files in the long listing format.

You can list any existing aliases by alias (see bash(1) under "SHELL BUILTIN COMMANDS").

```
$ alias
...
alias la='ls -la'
```

You can identify exact path or identity of the command by type (see bash(1) under "SHELL BUILTIN COMMANDS").

For example, try the following

```
$ type ls
ls is hashed (/bin/ls)
$ type la
la is aliased to ls -la
$ type echo
echo is a shell builtin
$ type file
file is /usr/bin/file
```

Here ls was recently searched while "file" was not, thus "ls" is "hashed", i.e., the shell has an internal record for the quick access to the location of the "ls" command.

---

**Tip**

See Section [9.3.6](#).

---

## 1.6 Unix-like text processing

In Unix-like work environment, text processing is done by piping text through chains of standard text processing tools. This was another crucial Unix innovation.

### 1.6.1 Unix text tools

There are few standard text processing tools which are used very often on the Unix-like system.

- No regular expression is used:
    - cat(1) concatenates files and outputs the whole content.
    - tac(1) concatenates files and outputs in reverse.
    - cut(1) selects parts of lines and outputs.
    - head(1) outputs the first part of files.
    - tail(1) outputs the last part of files.
    - sort(1) sorts lines of text files.
    - uniq(1) removes duplicate lines from a sorted file.
-

- `tr(1)` translates or deletes characters.
- `diff(1)` compares files line by line.
- Basic regular expression (**BRE**) is used as default:
  - `ed(1)` is a primitive line editor.
  - `sed(1)` is a stream editor.
  - `grep(1)` matches text with patterns.
  - `vim(1)` is a screen editor.
  - `emacs(1)` is a screen editor. (somewhat extended **BRE**)
- Extended regular expression (**ERE**) is used:
  - `awk(1)` does simple text processing.
  - `egrep(1)` matches text with patterns.
  - `tc(3tcl)` can do every conceivable text processing: See `re_syntax(3)`. Often used with `tk(3tk)`.
  - `perl(1)` can do every conceivable text processing. See `perlre(1)`.
  - `pcre2grep(1)` from the `pcre2-util` package matches text with [Perl Compatible Regular Expressions \(PCRE\)](#) pattern.
  - `python(1)` with the `re` module can do every conceivable text processing. See `/usr/share/doc/python/html/ind`

If you are not sure what exactly these commands do, please use `"man command"` to figure it out by yourself.

---

**Note**

Sort order and range expression are locale dependent. If you wish to obtain traditional behavior for a command, use **C** locale or **C.UTF-8** locale instead of normal **UTF-8** ones (see Section [8.1](#)).

---

---

**Note**

[Perl](#) regular expressions (`perlre(1)`), [Perl Compatible Regular Expressions \(PCRE\)](#), and [Python](#) regular expressions offered by the `re` module have many common extensions to the normal **ERE**.

---

## 1.6.2 Regular expressions

[Regular expressions](#) are used in many text processing tools. They are analogous to the shell globs, but they are more complicated and powerful.

The regular expression describes the matching pattern and is made up of text characters and **metacharacters**.

A **metacharacter** is just a character with a special meaning. There are 2 major styles, **BRE** and **ERE**, depending on the text tools as described above.

The regular expression of **emacs** is basically **BRE** but has been extended to treat "+" and "?" as the **metacharacters** as in **ERE**. Thus, there are no needs to escape them with "\" in the regular expression of `emacs`.

`grep(1)` can be used to perform the text search using the regular expression.

For example, try the following

```
$ egrep 'GNU.*LICENSE|Yoyodyne' /usr/share/common-licenses/GPL
GNU GENERAL PUBLIC LICENSE
GNU GENERAL PUBLIC LICENSE
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
```

---

**Tip**

See Section [9.3.6](#).

---

| BRE                                | ERE                         | description of the regular expression   |
|------------------------------------|-----------------------------|---|
| <code>\ . [ ] ^ \$ *</code>        | <code>\ . [ ] ^ \$ *</code> | common <b>metacharacters</b>  |
| <code>\+ \? \(\ \) \{ \} \ </code> |                             | BRE only "\ " escaped <b>metacharacters</b>   |
|                                    | <code>+ ? ( ) { }  </code>  | ERE only non-"\" escaped <b>metacharacters</b>  |
| <code>c</code>                     | <code>c</code>              | match <b>non-metacharacter</b> "c"  |
| <code>\c</code>                    | <code>\c</code>             | match a literal character "c" even if "c" is <b>metacharacter</b> by itself   |
| <code>.</code>                     | <code>.</code>              | match any character including newline   |
| <code>^</code>                     | <code>^</code>              | position at the beginning of a string   |
| <code>\$</code>                    | <code>\$</code>             | position at the end of a string   |
| <code>\&lt;</code>                 | <code>\&lt;</code>          | position at the beginning of a word   |
| <code>\&gt;</code>                 | <code>\&gt;</code>          | position at the end of a word   |
| <code>[abc...]</code>              | <code>[abc...]</code>       | match any characters in "abc..."  |
| <code>[^abc...]</code>             | <code>[^abc...]</code>      | match any characters except in "abc..."   |
| <code>r*</code>                    | <code>r*</code>             | match zero or more regular expressions identified by "r"  |
| <code>r\+</code>                   | <code>r+</code>             | match one or more regular expressions identified by "r"   |
| <code>r\?</code>                   | <code>r?</code>             | match zero or one regular expressions identified by "r"   |
| <code>r1 r2</code>                 | <code>r1 r2</code>          | match one of the regular expressions identified by "r1" or "r2"   |
| <code>\(r1 r2\)</code>             | <code>(r1 r2)</code>        | match one of the regular expressions identified by "r1" or "r2" and treat it as a <b>bracketed</b> regular expression |

Table 1.25: Metacharacters for BRE and ERE

### 1.6.3 Replacement expressions

For the replacement expression, some characters have special meanings.

| replacement expression | description of the text to replace the replacement expression                |
|------------------------|--|
| <code>&amp;</code>     | what the regular expression matched (use <code>\&amp;</code> in emacs)       |
| <code>\n</code>        | what the n-th <b>bracketed</b> regular expression matched ("n" being number) |

Table 1.26: The replacement expression

For Perl replacement string, "\$&" is used instead of "&" and "\$n" is used instead of "\n".

For example, try the following

```
$ echo zzz1abc2efg3hij4 | \
sed -e 's/(1[a-z]*)[0-9]*\(.*)$/=&/'
zzz=1abc2efg3hij4=
$ echo zzz1abc2efg3hij4 | \
sed -E -e 's/(1[a-z]*)[0-9]*\(.*)$/=&/'
zzz=1abc2efg3hij4=
$ echo zzz1abc2efg3hij4 | \
perl -pe 's/(1[a-z]*)[0-9]*\(.*)$/=&/'
zzz=1abc2efg3hij4=
$ echo zzz1abc2efg3hij4 | \
sed -e 's/(1[a-z]*)[0-9]*\(.*)$/\2===\1/'
zzzefg3hij4===1abc
$ echo zzz1abc2efg3hij4 | \
sed -E -e 's/(1[a-z]*)[0-9]*\(.*)$/\2===\1/'
```

```
zzzefg3hij4===1abc
$ echo zzz1abc2efg3hij4 | \
perl -pe 's/(1[a-z]*)[0-9]*(.*)$/$2===1/'
zzzefg3hij4===1abc
```

Here please pay extra attention to the style of the **bracketed** regular expression and how the matched strings are used in the text replacement process on different tools.

These regular expressions can be used for cursor movements and text replacement actions in some editors too.

The back slash "\ " at the end of line in the shell commandline escapes newline as a white space character and continues shell command line input to the next line.

Please read all the related manual pages to learn these commands.

### 1.6.4 Global substitution with regular expressions

The ed(1) command can replace all instances of "FROM\_REGEX" with "TO\_TEXT" in "file".

```
$ ed file <<EOF
,s/FROM_REGEX/TO_TEXT/g
w
q
EOF
```

The sed(1) command can replace all instances of "FROM\_REGEX" with "TO\_TEXT" in "file".

```
$ sed -i -e 's/FROM_REGEX/TO_TEXT/g' file
```

The vim(1) command can replace all instances of "FROM\_REGEX" with "TO\_TEXT" in "file" by using ex(1) commands.

```
$ vim +%s/FROM_REGEX/TO_TEXT/gc' '+update' '+q' file
```

---

#### Tip

The "c" flag in the above ensures interactive confirmation for each substitution.

---

Multiple files ("file1", "file2", and "file3") can be processed with regular expressions similarly with vim(1) or perl(1).

```
$ vim '+argdo %s/FROM_REGEX/TO_TEXT/gce|update' '+q' file1 file2 file3
```

---

#### Tip

The "e" flag in the above prevents the "No match" error from breaking a mapping.

---

```
$ perl -i -p -e 's/FROM_REGEX/TO_TEXT/g;' file1 file2 file3
```

In the perl(1) example, "-i" is for the in-place editing of each target file, and "-p" is for the implicit loop over all given files.

---

#### Tip

Use of argument "-i.bak" instead of "-i" keeps each original file by adding ".bak" to its filename. This makes recovery from errors easier for complex substitutions.

---



---

#### Note

ed(1) and vim(1) are **BRE**; perl(1) is **ERE**.

---

## 1.6.5 Extracting data from text file table

Let's consider a text file called "DPL" in which some pre-2004 Debian project leader's names and their initiation date are listed in a space-separated format.

```
Ian      Murdock   August  1993
Bruce    Perens    April   1996
Ian      Jackson   January 1998
Wichert  Akkerman   January 1999
Ben      Collins    April   2001
Bdale    Garbee     April   2002
Martin   Michlmayr  March   2003
```

---

### Tip

See "[A Brief History of Debian](#)" for the latest [Debian leadership history](#).

---

Awk is frequently used to extract data from these types of files.

For example, try the following

```
$ awk '{ print $3 }' <DPL                # month started
August
April
January
January
April
April
March
$ awk '($1=="Ian") { print }' <DPL        # DPL called Ian
Ian      Murdock   August  1993
Ian      Jackson   January 1998
$ awk '($2=="Perens") { print $3,$4 }' <DPL # When Perens started
April 1996
```

Shells such as Bash can be also used to parse this kind of file.

For example, try the following

```
$ while read first last month year; do
    echo $month
done <DPL
... same output as the first Awk example
```

Here, the read builtin command uses characters in "\$IFS" (internal field separators) to split lines into words.

If you change "\$IFS" to ":", you can parse "/etc/passwd" with shell nicely.

```
$ oldIFS="$IFS"    # save old value
$ IFS=':'
$ while read user password uid gid rest_of_line; do
    if [ "$user" = "bozo" ]; then
        echo "$user's ID is $uid"
    fi
done < /etc/passwd
bozo's ID is 1000
$ IFS="$oldIFS"    # restore old value
```

(If Awk is used to do the equivalent, use "FS=':'" to set the field separator.)

IFS is also used by the shell to split results of parameter expansion, command substitution, and arithmetic expansion. These do not occur within double or single quoted words. The default value of IFS is *space*, *tab*, and *newline* combined.

---

Be careful about using this shell IFS tricks. Strange things may happen, when shell interprets some parts of the script as its **input**.

```
$ IFS=":,"
$ echo IFS=$IFS, IFS="$IFS"      # use ":" and "," as IFS
IFS= , IFS=:
$ date -R                        # echo is a Bash builtin
Sat, 23 Aug 2003 08:30:15 +0200
$ echo $(date -R)                # just a command output
Sat 23 Aug 2003 08 30 36 +0200
$ unset IFS                      # sub shell --> input to main shell
$ echo $(date -R)                # reset IFS to the default
Sat, 23 Aug 2003 08:30:50 +0200
```

### 1.6.6 Script snippets for piping commands

The following scripts do nice things as a part of a pipe.

| script snippet (type in one line)              | effect of command   |
|--|---|
| <code>find /usr -print</code>                  | find all files under "/usr"                                       |
| <code>seq 1 100</code>                         | print 1 to 100  |
| <code>  xargs -n 1 <i>command</i></code>       | run command repeatedly with each item from pipe as its argument   |
| <code>  xargs -n 1 echo</code>                 | split white-space-separated items from pipe into lines            |
| <code>  xargs echo</code>                      | merge all lines from pipe into a line                             |
| <code>  grep -e <i>regex_pattern</i></code>    | extract lines from pipe containing <i>regex_pattern</i>           |
| <code>  grep -v -e <i>regex_pattern</i></code> | extract lines from pipe not containing <i>regex_pattern</i>       |
| <code>  cut -d: -f3 -</code>                   | extract third field from pipe separated by ":" (passwd file etc.) |
| <code>  awk '{ print \$3 }'</code>             | extract third field from pipe separated by whitespaces            |
| <code>  awk -F'\t' '{ print \$3 }'</code>      | extract third field from pipe separated by tab                    |
| <code>  col -bx</code>                         | remove backspace and expand tabs to spaces                        |
| <code>  expand -</code>                        | expand tabs   |
| <code>  sort  uniq</code>                      | sort and remove duplicates  |
| <code>  tr 'A-Z' 'a-z'</code>                  | convert uppercase to lowercase                                    |
| <code>  tr -d '\n'</code>                      | concatenate lines into one line                                   |
| <code>  tr -d '\r'</code>                      | remove CR   |
| <code>  sed 's/^/# /'</code>                   | add "#" to the start of each line                                 |
| <code>  sed 's/\.ext//g'</code>                | remove ".ext"   |
| <code>  sed -n -e 2p</code>                    | print the second line   |
| <code>  head -n 2 -</code>                     | print the first 2 lines   |
| <code>  tail -n 2 -</code>                     | print the last 2 lines  |

Table 1.27: List of script snippets for piping commands

A one-line shell script can loop over many files using `find(1)` and `xargs(1)` to perform quite complicated tasks. See Section 10.1.5 and Section 9.4.9.

When using the shell interactive mode becomes too complicated, please consider to write a shell script (see Section 12.1).



## Chapter 2

# Debian package management

---

### Note

This chapter is written assuming the latest stable release is codename: `trixie`.

The data source of the APT system is collectively referred as **the source list** in this document. This can be defined anywhere in the `/etc/apt/sources.list` file, `/etc/apt/sources.list.d/*.list` files, or `/etc/apt/sources.list.d/*.sources` files.

---

## 2.1 Debian package management prerequisites

### 2.1.1 Debian package management system

[Debian](#) is a volunteer organization which builds **consistent** distributions of pre-compiled binary packages of free software and distributes them from its archive.

[The Debian archive](#) is offered by [many remote mirror sites](#) for access through HTTP and FTP methods. It is also available as [CD-ROM/DVD](#).

The current Debian package management system which can utilize all these resources is [Advanced Packaging Tool \(APT\)](#).

The Debian package management system, **when used properly**, offers the user to install **consistent sets of binary packages** to the system from the archive. Currently, there are 77010 packages available for the amd64 architecture.

The Debian package management system has a rich history and many choices for the front end user program and back end archive access method to be used. Currently, we recommend the following.

- `apt(8)` for all interactive command line operations, including package installation, removal and dist-upgrades.
- `apt-get(8)` for calling Debian package management system from scripts. It is also a fallback option when `apt` is not available (often with older Debian systems).
- `aptitude(8)` for an interactive text interface to manage the installed packages and to search the available packages.

### 2.1.2 Package configuration

Here are some key points for package configuration on the Debian system.

---

| package                             | popcon        | size | description  |
|-------------------------------------|---------------|------|--|
| <a href="#">dpkg</a>                | V:905, I:1000 | 6399 | low level package management system for Debian (file based)                            |
| <a href="#">apt</a>                 | V:896, I:1000 | 4682 | APT front-end to manage packages with CLI: apt/apt-get/apt-cache                       |
| <a href="#">aptitude</a>            | V:34, I:172   | 4621 | APT front-end to interactively manage packages with full screen console: aptitude(8)   |
| <a href="#">tasksel</a>             | V:37, I:984   | 346  | APT front-end to install selected tasks: tasksel(8)                                    |
| <a href="#">unattended-upgrades</a> | V:128, I:183  | 317  | enhancement package for APT to enable automatic installation of security upgrades      |
| <a href="#">gnome-software</a>      | V:160, I:262  | 4715 | Software Center for GNOME (GUI APT front-end)  |
| <a href="#">synaptic</a>            | V:32, I:282   | 7788 | graphical package manager (GTK APT front-end)  |
| <a href="#">apt-utils</a>           | V:418, I:998  | 1139 | APT utility programs: apt-extracttemplates(1), apt-ftpparchive(1), and apt-sortpkgs(1) |
| <a href="#">apt-listchanges</a>     | V:401, I:891  | 563  | package change history notification tool   |
| <a href="#">apt-listbugs</a>        | V:5.2, I:7.1  | 512  | lists critical bugs before each APT installation                                       |
| <a href="#">apt-file</a>            | V:15, I:56    | 89   | APT package searching utility — command-line interface                                 |
| <a href="#">apt-rdepends</a>        | V:0.4, I:4.5  | 39   | recursively lists package dependencies   |

Table 2.1: List of Debian package management tools

- For the modern Desktop environment, rebooting of the system after package configuration change and package upgrade is a good idea to ensure the system to function properly.
- The manual configuration by the system administrator is respected. In other words, the package configuration system makes no intrusive configuration for the sake of convenience.
- Each package comes with its own configuration script with standardized user interface called debconf(7) to help initial installation process of the package.
- Debian Developers try their best to make your upgrade experience flawless with package configuration scripts.
- Full functionalities of packaged software are available to the system administrator. But ones with security risks are disabled in the default installation.
- If you manually activate a service with some security risks, you are responsible for the risk containment.
- Esoteric configuration may be manually enabled by the system administrator. This may create interference with popular generic helper programs for the system configuration.

### 2.1.3 Basic precautions



#### Warning

Do not install packages from random mixture of suites. It probably breaks the package consistency which requires deep system management knowledge, such as compiler [ABI](#), [library](#) version, interpreter features, etc.

The [newbie](#) Debian system administrator should stay with the **stable** release of Debian while applying only security updates. Until you understand the Debian system very well, you should follow the following precautions.

- Do not include **testing** or **unstable** in the **source list**.
- Do not mix standard Debian with other non-Debian archives such as Ubuntu in the **source list**.

- Do not create `/etc/apt/preferences`.
- Do not change default behavior of package management tools through configuration files without knowing their full impacts.
- Do not install random packages by `dpkg -i random_package`.
- Do not ever install random packages by `dpkg --force-all -i random_package`.
- Do not erase or alter files in `/var/lib/dpkg/`.
- Do not overwrite system files by installing software programs directly compiled from source.
  - Install them into `/usr/local` or `/opt`, if needed.

The non-compatible effects caused by violating above precautions to the Debian package management system may leave your system unusable.

The serious Debian system administrator who runs mission critical servers, should use extra precautions.

- Do not install any packages including security updates from Debian without thoroughly testing them with your particular configuration under safe conditions.
  - You as the system administrator are responsible for your system in the end.
  - The long stability history of the Debian system is no guarantee by itself.

## 2.1.4 Life with eternal upgrades



### Caution

For your **production server**, the stable suite with the security updates is recommended. The same can be said for desktop PCs on which you can spend limited administration efforts.

---

Despite my warnings above, I know many readers of this document may wish to run the newer testing or unstable suites.

[Enlightenment](#) with the following saves a person from the eternal [karmic](#) struggle of upgrade [hell](#) and let him reach Debian [nirvana](#).

This list is targeted for the **self-administered** Desktop environment.

- Use the testing suite since it is practically the rolling release automatically managed by the Debian archive QA infrastructure such as the [Debian continuous integration](#), the [source only upload practices](#), and the [library transition tracking](#). The packages in the testing suite are updated frequently enough to offer all the latest features.
- Set the codename corresponding to the testing suite ("forky" during the trixie-as-stable release cycle) in **the source list**.
- Manually update this codename in **the source list** to the new one only after assessing situation by yourself for about a month after the major suite release. The Debian user and developer mailing list are good sources of information for this, too.

The use of the unstable suite isn't recommended. The unstable suite is **good for debugging packages** as a developer but tends to expose you to unnecessary risks for the normal Desktop usage. Even though the unstable suite of the Debian system looks very stable for most of the times, there have been some package problems and a few of them were not so trivial to resolve.

Here are some basic precautionary measure ideas to ensure quick and easy recovery from bugs in Debian packages.

---

- Make the rescue system available by following Section 3.2.
- Make the system **dual bootable** by installing the stable suite of the Debian system to another partition
- Consider installing `apt - listbugs` to check the [Debian Bug Tracking System \(BTS\)](#) information before the upgrade
- Learn the package system infrastructure enough to work around the problem

**Caution**

If you can not do any one of these precautionary actions, you are probably not ready for the testing and unstable suites.

---

### 2.1.5 Debian archive basics

---

**Tip**

Official policy of the Debian archive is defined at [Debian Policy Manual, Chapter 2 - The Debian Archive](#).

---

Let's look into [the Debian archive](#) from a system user's perspective.

For a system user, [the Debian archive](#) is accessed using the APT system.

The APT system specifies its data source as **the source list** and it is described in `sources.list(5)`.

For the trixie system with the typical HTTP access, **the source list** is provided in the modern deb822-style in `"/etc/apt/sources.list.d/debian.sources"` as the following:

```
Types: deb deb-src
URIs: http://deb.debian.org/debian/
Suites: trixie
Components: main non-free-firmware contrib non-free
```

```
Types: deb deb-src
URIs: http://security.debian.org/debian-security/
Suites: trixie-security
Components: main non-free-firmware contrib non-free
```

---

**Tip**

If **the source list** is provided in the older deprecated one-line-style in `"/etc/apt/sources.list"` or `"/etc/apt/sources.list.d/*.list"` files, update them with:

```
$ sudo apt modernize-sources
```

---

Key points of **the source list** in deb822-style are followings.

- It's definition files are in `"/etc/apt/sources.list.d/*.sources"` files.
  - Each block of lines separated by a blank line defines the data source for the APT system.
  - The "Types:" stanza defines the list of types such as "deb" and "deb-src".
  - The "URIs:" stanza defines the list of root URIs of the Debian archive.
  - The "Suites:" stanza defines the list of distribution names using either the suite name or the codename.
-

- The "Components:" stanza defines the list of valid archive area names of the Debian archive.

The definition for "deb-src" can safely be omitted if it is just for aptitude which does not access source related meta data. It speeds up the updates of the archive meta data.

The URL can be "https://", "http://", "ftp://", "file://", ....

Lines starting with "#" are comments and ignored.

Here, I tend to use codename "trixie" or "forky" instead of suite name "stable" or "testing" to avoid surprises when the next stable is released.

### Tip

If "sid" is used in the above example instead of "trixie", the "deb: http://security.debian.org/ ..." line or its deb822 equivalent content for security updates in **the source list** is not required. This is because there is no security update archive for "sid" (unstable).

Here is the list of URL of the Debian archive sites and suite name or codename used in the configuration file after the trixie release.

| archive URL   | suite name              | codename | purpose of repository   |
|---|-------------------------|----------|---|
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | stable                  | trixie   | Quasi-static stable release after extensive checks  |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | testing                 | forky    | Dynamic testing release after decent checks and short waits                                     |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | unstable                | sid      | Dynamic unstable release after minimal checks and no waits                                      |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | experimental            | N/A      | Pre-release experiments by developers (optional, only for developer)                            |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | stable-proposed-updates | trixie   | Proposed updates for the next stable point release (optional)                                   |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | stable-updates          | trixie   | Subset of stable-proposed-updates suite needing urgent updates such as timezone data (optional) |
| <a href="http://deb.debian.org/debian/">http://deb.debian.org/debian/</a>                             | stable-backports        | trixie   | Random collection of recompiled packages mostly from the testing release (optional)             |
| <a href="http://security.debian.org/debian-security/">http://security.debian.org/debian-security/</a> | stable-security         | trixie   | Security updates for the stable release (important)   |
| <a href="http://security.debian.org/debian-security/">http://security.debian.org/debian-security/</a> | testing-security        | forky    | This is not actively supported nor used by the security team                                    |

Table 2.2: List of Debian archive sites



### Caution

Only pure **stable** release with security updates provides the best stability. Running mostly **stable** release mixed with some packages from **testing** or **unstable** release is riskier than running pure **unstable** release for library version mismatch etc. If you really need the latest version of some programs under **stable** release, please use packages from [stable-updates](#) and [backports](#) (see Section 2.7.4) services. These services must be used with extra care.



### Caution

You should basically list only one of stable, testing, or unstable suites in the "deb" line. If you list any combination of stable, testing, and unstable suites in the "deb" line, APT programs slow down while only the latest archive is effective. Multiple listing makes sense for these when the "/etc/apt/preferences" file is used with clear objectives (see Section 2.7.7).

**Tip**

For the Debian system with the stable suite, it is a good idea to include the content with "http://security.debian.org/" in **the source list** to enable security updates as in the example above.

**Note**

The security bugs for the stable archive are fixed by the Debian security team. This activity has been quite rigorous and reliable. Those for the testing archive may be fixed by the Debian testing security team. For [several reasons](#), this activity is not as rigorous as that for stable and you may need to wait for the migration of fixed unstable packages to the testing archive. Those for the unstable archive are fixed by the individual maintainer. Actively maintained unstable packages are usually in a fairly good shape by leveraging latest upstream security fixes. See [Debian security FAQ](#) for how Debian handles security bugs.

| area              | number of packages | criteria of package component   |
|-------------------|--------------------|---|
| main              | 75532              | DFSG compliant and no dependency to non-free  |
| non-free-firmware | 74                 | <a href="#">not DFSG compliant, firmware required for reasonable system installation experience</a> |
| contrib           | 360                | DFSG compliant but having dependency to non-free  |
| non-free          | 1044               | not DFSG compliant and not in non-free-firmware   |

Table 2.3: List of Debian archive area

Here the number of packages in the above is for the amd64 architecture. The main area provides the Debian system (see Section [2.1.6](#)).

The Debian archive organization can be studied best by pointing your browser to the each archive URL appended with `dists` or `pool`.

The distribution is referred by two ways, the suite or [codename](#). The word distribution is alternatively used as the synonym to the suite in many documentations. The relationship between the suite and the codename can be summarized as the following.

| Timing                   | suite = stable    | suite = testing  | suite = unstable |
|--------------------------|-------------------|------------------|------------------|
| after the trixie release | codename = trixie | codename = forky | codename = sid   |
| after the forky release  | codename = forky  | codename = duke  | codename = sid   |

Table 2.4: The relationship between suite and codename

The history of codenames are described in [Debian FAQ: 6.2.1 Which other codenames have been used in the past?](#)

In the stricter Debian archive terminology, the word "section" is specifically used for the categorization of packages by the application area. (Although, the word "main section" may sometimes be used to describe the Debian archive area named as "main".)

Every time a new upload is done by a Debian developer (DD) to the unstable archive (via [incoming](#) processing), the DD is required to ensure uploaded packages to be compatible with the latest set of packages in the latest unstable archive.

If DD breaks this compatibility intentionally for important library upgrade etc, there is usually announcement to [the debian-devel mailing list](#) etc.

Before a set of packages are moved by the Debian archive maintenance script from the unstable archive to the testing archive, the archive maintenance script not only checks the maturity (about 2-10 days old) and the status of the RC bug reports for the packages but also tries to ensure them to be compatible with the latest set of packages in the testing archive. This process makes the testing archive very current and usable.

Through the gradual archive freeze process led by the release team, the `testing` archive is matured to make it completely consistent and bug free with some manual interventions. Then the new `stable` release is created by assigning the codename for the old `testing` archive to the new `stable` archive and creating the new codename for the new `testing` archive. The initial contents of the new `testing` archive is exactly the same as that of the newly released `stable` archive.

Both the `unstable` and the `testing` archives may suffer temporary glitches due to several factors.

- Broken package upload to the archive (mostly for `unstable`)
- Delay of accepting the new packages to the archive (mostly for `unstable`)
- Archive synchronization timing issue (both for `testing` and `unstable`)
- Manual intervention to the archive such as package removal (more for `testing`) etc.

So if you ever decide to use these archives, you should be able to fix or work around these kinds of glitches.

---

**Caution**

For about few months after a new `stable` release, most desktop users should use the `stable` archive with its security updates even if they usually use `unstable` or `testing` archives. For this transition period, both `unstable` and `testing` archives are not good for most people. Your system is difficult to keep in good working condition with the `unstable` archive since it suffers surges of major upgrades for core packages. The `testing` archive is not useful either since it contains mostly the same content as the `stable` archive without its security support ([Debian testing-security-announce 2008-12](#)). After a month or so, `unstable` or `testing` archives may become useful if you are careful.

---

**Tip**

When tracking the `testing` archive, a problem caused by a removed package is usually worked around by installing corresponding package from the `unstable` archive which is uploaded for bug fix.

---

See [Debian Policy Manual](#) for archive definitions.

- ["Sections"](#)
- ["Priorities"](#)
- ["Base system"](#)
- ["Essential packages"](#)

## 2.1.6 Debian is 100% free software

Debian is 100% free software because of the followings:

- Debian installs only free software by default to respect user's freedoms.
- Debian provides only free software in `main`.
- Debian recommends running only free software from `main`.
- No packages in `main` depend nor recommend packages in `non-free` nor `non-free-firmware` nor `contrib`.

Some people wonder if the following 2 facts contradict or not.

---



- "Debian will remain 100% free". (First term of [Debian Social Contract](#))
- Debian servers host some non-free-firmware, non-free and contrib packages.

These do not contradict, because of the followings.

- The Debian system is 100% free and its packages are hosted by Debian servers in the main area.
- Packages outside of the Debian system are hosted by Debian servers in the non-free, non-free-firmware and contrib areas.

These are precisely explained in the 4th and 5th terms of [Debian Social Contract](#):

- Our priorities are our users and free software
  - We will be guided by the needs of our users and the free software community. We will place their interests first in our priorities. We will support the needs of our users for operation in many different kinds of computing environments. We will not object to non-free works that are intended to be used on Debian systems, or attempt to charge a fee to people who create or use such works. We will allow others to create distributions containing both the Debian system and other works, without any fee from us. In furtherance of these goals, we will provide an integrated system of high-quality materials with no legal restrictions that would prevent such uses of the system.
- Works that do not meet our free software standards
  - We acknowledge that some of our users require the use of works that do not conform to the Debian Free Software Guidelines. We have created "non-free", "non-free-firmware" and "contrib" areas in our archive for these works. The packages in these areas are not part of the Debian system, although they have been configured for use with Debian. We encourage CD manufacturers to read the licenses of the packages in these areas and determine if they can distribute the packages on their CDs. Thus, although non-free works are not a part of Debian, we support their use and provide infrastructure for non-free packages (such as our bug tracking system and mailing lists). The Debian official media may include firmware that is otherwise not part of the Debian system to enable use of Debian with hardware that requires such firmware.

---

**Note**

The actual text of the 5th term in the current [Debian Social Contract](#) 1.2 is slightly different from the above text. This editorial deviation is intentional one to make this user document consistent without changing the real content of the Social Contract.

---

Users should be aware of the risks of using packages in the non-free, non-free-firmware and contrib areas:

- lack of freedom for such software packages
- lack of support from Debian on such software packages (Debian can't support software properly without having access to its source code.)
- contamination of your 100% free Debian system

The [Debian Free Software Guidelines](#) are the free software standards for [Debian](#). Debian interprets "software" in the widest scope including document, firmware, logo, and artwork data in the package. This makes Debian's free software standards very strict ones.

Typical non-free, non-free-firmware and contrib packages include freely distributable packages of following types:

- Document packages under [GNU Free Documentation License](#) with invariant sections such as ones for GCC and Make. (mostly found in the non-free/doc section.)
-



- Firmware packages containing sourceless binary data such as ones listed in Section [9.10.5](#) as non-free-firmware. (mostly found in the non-free-firmware/kernel section.)
- Game and font packages with restriction on commercial use and/or content modification.

Please note that the number of non-free, non-free-firmware and contrib packages is less than 2% of that of main packages. Enabling access to the non-free, non-free-firmware and contrib areas does not obscure the source of packages. Interactive full screen use of `aptitude(8)` provides you with full visibility and control over what packages are installed from which area to keep your system as free as you wish.

### 2.1.7 Package dependencies

The Debian system offers a consistent set of binary packages through its versioned binary dependency declaration mechanism in the control file fields. Here is a bit over simplified definition for them.

- "Depends"
  - This declares an absolute dependency and all of the packages listed in this field must be installed at the same time or in advance.
- "Pre-Depends"
  - This is like Depends, except that it requires completed installation of the listed packages in advance.
- "Recommends"
  - This declares a strong, but not absolute, dependency. Most users would not want the package unless all of the packages listed in this field are installed.
- "Suggests"
  - This declares a weak dependency. Many users of this package may benefit from installing packages listed in this field but can have reasonable functions without them.
- "Enhances"
  - This declares a weak dependency like Suggests but works in the opposite direction.
- "Breaks"
  - This declares a package incompatibility usually with some version specification. Generally the resolution is to upgrade all of the packages listed in this field.
- "Conflicts"
  - This declares an absolute incompatibility. All of the packages listed in this field must be removed to install this package.
- "Replaces"
  - This is declared when files installed by this package replace files in the listed packages.
- "Provides"
  - This is declared when this package provide all of the files and functionality in the listed packages.

---

#### Note

Please note that defining "Provides", "Conflicts" and "Replaces" simultaneously to an virtual package is the sane configuration. This ensures that only one real package providing this virtual package can be installed at any one time.

---

The official definition including source dependency can be found in [the Policy Manual: Chapter 7 - Declaring relationships between packages](#).

---

## 2.1.8 The event flow of the package management

Here is a summary of the simplified event flow of the package management by APT.

- **Update** ("apt update", "aptitude update" or "apt-get update"):
  1. Fetch archive metadata from remote archive
  2. Reconstruct and update local metadata for use by APT
- **Upgrade** ("apt upgrade" and "apt full-upgrade", or "aptitude safe-upgrade" and "aptitude full-upgrade" or "apt-get upgrade" and "apt-get dist-upgrade"):
  1. Choose candidate version which is usually the latest available version for all installed packages (see Section 2.7.7 for exception)
  2. Make package dependency resolution
  3. Fetch selected binary packages from remote archive if candidate version is different from installed version
  4. Unpack fetched binary packages
  5. Run **preinst** script
  6. Install binary files
  7. Run **postinst** script
- **Install** ("apt install ...", "aptitude install ..." or "apt-get install ..."):
  1. Choose packages listed on the command line
  2. Make package dependency resolution
  3. Fetch selected binary packages from remote archive
  4. Unpack fetched binary packages
  5. Run **preinst** script
  6. Install binary files
  7. Run **postinst** script
- **Remove** ("apt remove ...", "aptitude remove ..." or "apt-get remove ..."):
  1. Choose packages listed on the command line
  2. Make package dependency resolution
  3. Run **prerm** script
  4. Remove installed files **except** configuration files
  5. Run **postrm** script
- **Purge** ("apt purge", "aptitude purge ..." or "apt-get purge ..."):
  1. Choose packages listed on the command line
  2. Make package dependency resolution
  3. Run **prerm** script
  4. Remove installed files **including** configuration files
  5. Run **postrm** script

Here, I intentionally skipped technical details for the sake of big picture.

---

### 2.1.9 First response to package management troubles

You should read the fine official documentation. The first document to read is the Debian specific `/usr/share/doc/package_name/`. Other documentation in `/usr/share/doc/package_name/` should be consulted too. If you set shell as Section 1.4.2, type the following.

```
$ cd package_name
$ pager README.Debian
$ mc
```

You may need to install the corresponding documentation package named with `-doc` suffix for detailed information. If you are experiencing problems with a specific package, make sure to check out [the Debian bug tracking system \(BTS\)](#) sites, first.

| web site  | command  |
|---|--|
| Home page of <a href="#">the Debian bug tracking system (BTS)</a> | <code>sensible-browser "https://bugs.debian.org/"</code>             |
| The bug report of a known package name                            | <code>sensible-browser "https://bugs.debian.org/package_name"</code> |
| The bug report of known bug number                                | <code>sensible-browser "https://bugs.debian.org/bug_number"</code>   |

Table 2.5: List of key web site to resolving problems with a specific package

Search [Google](#) with search words including `site:debian.org`, `site:wiki.debian.org`, `site:lists.debian.org` etc.

When you file a bug report, please use `reportbug(1)` command.

### 2.1.10 How to pick Debian packages

When you encounter more than 2 similar packages and wonder which one to install without "trial and error" efforts, you should use some **common sense**. I consider following points are good indications of preferred packages.

- Essential: yes > no
- Area: main > contrib > non-free
- Priority: required > important > standard > optional > extra
- Tasks: packages listed in tasks such as "Desktop environment"
- Packages selected by the dependency package (e.g., gcc-15 by gcc)
- Popcon: higher in the vote and install number
- Changelog: regular updates by the maintainer
- BTS: No RC bugs (no critical, no grave, and no serious bugs)
- BTS: responsive maintainer to bug reports
- BTS: higher number of the recently fixed bugs
- BTS: lower number of remaining non-wishlist bugs

Debian being a volunteer project with distributed development model, its archive contains many packages with different focus and quality. You must make your own decision what to do with them.

### 2.1.11 How to cope with conflicting requirements

Whatever suite of Debian system you may decide to use, you may still wish to run versions of programs which aren't available in that suite. Even if you find binary packages of such programs in other Debian suites or in other non-Debian resources, their requirements may conflict with your current Debian system.

Although you can tweak package management system with **apt-pinning** technique etc. as described in Section 2.7.7 to instal such out-of-sync binary packages, such tweaking approaches have only limited use cases since they may break those programs and your system.

Before brutally installing such out-of-sync packages, you should seek all available alternative safer technical solutions which are compatible with your current Debian syetem.

- Install such programs using corresponding sandboxed upstream binary packages (see Section 7.7).
  - Many mostly GUI programs such as LibreOffice and GNOME applications are available as [Flatpak](#), [Snap](#), or [Applimage](#) packages.
- Create a chroot or similar environment and run such programs in it (see Section 9.11).
  - CLI commands can be executed easily under its compatible chroot (see Section 9.11.4).
  - Multiple full desktop environments can be tried easily without reboot (see Section 9.11.5).
- Build desired versions of binary packages which are compatible with your current Debian syetem by yourself.
  - This is a [non-trivial task](#) (see Section 2.7.13).

## 2.2 Basic package management operations

Repository based package management operations on the Debian system can be performed by many APT-based package management tools available on the Debian system. Here, we explain 3 basic package management tools: `apt`, `apt-get` / `apt-cache` and `aptitude`.

For the package management operation which involves package installation or updates package metadata, you need to have root privilege.

### 2.2.1 apt vs. apt-get / apt-cache vs. aptitude

Although `aptitude` is a very nice interactive tool which the author mainly uses, you should know some cautionary facts:

- The `aptitude` command is not recommended for the release-to-release system upgrade on the stable Debian system after the new release.
  - The use of "`apt full-upgrade`" or "`apt-get dist-upgrade`" is recommended for it. See [Bug #411280](#).
- The `aptitude` command sometimes suggests mass package removals for the system upgrade on the testing or unstable Debian system.
  - This situation has frightened many system administrators. Don't panic.
  - This seems to be caused mostly by the version skew among packages depended or recommended by a meta-package such as `gnome-core`.
  - This can be resolved by selecting "Cancel pending actions" in the `aptitude` command menu, exiting `aptitude`, and using "`apt full-upgrade`".

The `apt-get` and `apt-cache` commands are the most **basic** APT-based package management tools.

---

- `apt-get` and `apt-cache` offer only the commandline user interface.
- `apt-get` is most suitable for the **major system upgrade** between releases, etc.
- `apt-get` offers a **robust** package dependency resolver.
- `apt-get` is less demanding on hardware resources. It consumes less memory and runs faster.
- `apt-cache` offers a **standard** regex based search on the package name and description.
- `apt-get` and `apt-cache` can manage multiple versions of packages using `/etc/apt/preferences` but it is quite cumbersome.

The `apt` command is a high-level commandline interface for package management. It is basically a wrapper of `apt-get`, `apt-cache` and similar commands, originally intended as an end-user interface and enables some options better suited for interactive usage by default.

- `apt` provides a friendly progress bar when installing packages using `apt install`.
- `apt` will **remove** cached `.deb` packages by default after successful installation of downloaded packages.

---

**Tip**

Users are recommended to use the new `apt(8)` command for **interactive** usage and use the `apt-get(8)` and `apt-cache(8)` commands in the shell script.

---

The `aptitude` command is the most **versatile** APT-based package management tool.

- `aptitude` offers the fullscreen interactive text user interface.
- `aptitude` offers the commandline user interface, too.
- `aptitude` is most suitable for the **daily interactive package management** such as inspecting installed packages and searching available packages.
- `aptitude` is more demanding on hardware resources. It consumes more memory and runs slower.
- `aptitude` offers an **enhanced** regex based search on all of the package metadata.
- `aptitude` can manage multiple versions of packages without using `/etc/apt/preferences` and it is quite intuitive.

## 2.2.2 Basic package management operations with the commandline

Here are basic package management operations with the commandline using `apt(8)`, `aptitude(8)` and `apt-get(8)`/`apt-cache(8)`.

`apt` / `apt-get` and `aptitude` can be mixed without major troubles.

The "`aptitude why regex`" can list more information by "`aptitude -v why regex`". Similar information can be obtained by "`apt rdepends package`" or "`apt-cache rdepends package`".

When `aptitude` command is started in the commandline mode and faces some issues such as package conflicts, you can switch to the full screen interactive mode by pressing "e"-key later at the prompt.

---

**Note**

Although the `aptitude` command comes with rich features such as its enhanced package resolver, this complexity has caused (or may still causes) some regressions such as [Bug #411123](#), [Bug #514930](#), and [Bug #570377](#). In case of doubt, please use the `apt`, `apt-get` and `apt-cache` commands over the `aptitude` command.

---

You may provide command options right after "`aptitude`".

See `aptitude(8)` and "aptitude user's manual" at "`/usr/share/doc/aptitude/README`" for more.

---

| apt syntax                     | aptitude syntax               | apt-get/apt-cache syntax      | description  |
|--------------------------------|-------------------------------|-------------------------------|--|
| apt update                     | aptitude update               | apt-get update                | update package archive metadata  |
| apt install foo                | aptitude install foo          | apt-get install foo           | install candidate version of "foo" package with its dependencies                           |
| apt upgrade                    | aptitude safe-upgrade         | apt-get upgrade               | install candidate version of installed packages without removing any other packages        |
| apt full-upgrade               | aptitude full-upgrade         | apt-get dist-upgrade          | install candidate version of installed packages while removing obsolete packages if needed |
| apt remove foo                 | aptitude remove foo           | apt-get remove foo            | remove "foo" package while leaving its configuration files                                 |
| apt autoremove                 | N/A                           | apt-get autoremove            | remove auto-installed packages which are no longer required                                |
| apt purge foo                  | aptitude purge foo            | apt-get purge foo             | purge "foo" package with its configuration files   |
| apt clean                      | aptitude clean                | apt-get clean                 | clear out the local repository of retrieved package files completely                       |
| apt autoclean                  | aptitude autoclean            | apt-get autoclean             | clear out the local repository of retrieved package files for outdated packages            |
| apt show foo                   | aptitude show foo             | apt-cache show foo            | display detailed information about "foo" package   |
| apt search <i>regex</i>        | aptitude search <i>regex</i>  | apt-cache search <i>regex</i> | search packages which match <i>regex</i>   |
| N/A                            | aptitude why <i>regex</i>     | N/A                           | explain the reason why <i>regex</i> matching packages should be installed                  |
| N/A                            | aptitude why-not <i>regex</i> | N/A                           | explain the reason why <i>regex</i> matching packages can not be installed                 |
| apt list<br>--manual-installed | aptitude search<br>~i!~M'     | apt-mark<br>showmanual        | list manually installed packages   |

Table 2.6: Basic package management operations with the commandline using apt(8), aptitude(8) and apt-get(8) / apt-cache(8)

| command option | description   |
|----------------|---|
| -s             | simulate the result of the command                                      |
| -d             | download only but no install/upgrade                                    |
| -D             | show brief explanations before the automatic installations and removals |

Table 2.7: Notable command options for aptitude(8)

## 2.2.3 Interactive use of aptitude

For the interactive package management, you start `aptitude` in interactive mode from the console shell prompt as follows.

```
$ sudo aptitude -u
Password:
```

This updates the local copy of the archive information and display the package list in the full screen with menu. Aptitude places its configuration at `~/.aptitude/config`.

### Tip

If you want to use root's configuration instead of user's one, use `"sudo -H aptitude ..."` instead of `"sudo aptitude ..."` in the above expression.

### Tip

Aptitude automatically sets **pending actions** as it is started interactively. If you do not like it, you can reset it from menu: "Action" → "Cancel pending actions".

## 2.2.4 Key bindings of aptitude

Notable key strokes to browse status of packages and to set "planned action" on them in this full screen mode are the following.

| key                        | key binding  |
|----------------------------|--|
| F10 or Ctrl-t              | menu   |
| ?                          | display <b>help</b> for keystroke (more complete listing)          |
| F10 → Help → User's Manual | display User's Manual  |
| u                          | update package archive information                                 |
| +                          | mark the package for the <b>upgrade</b> or the <b>install</b>      |
| -                          | mark the package for the <b>remove</b> (keep configuration files)  |
| _                          | mark the package for the <b>purge</b> (remove configuration files) |
| =                          | place the package on <b>hold</b>                                   |
| U                          | mark all upgradable packages (function as <b>full-upgrade</b> )    |
| g                          | start <b>downloading</b> and <b>installing</b> selected packages   |
| q                          | quit current screen and save changes                               |
| x                          | quit current screen and discard changes                            |
| Enter                      | view information about a package                                   |
| C                          | view a package's changelog   |
| l                          | change the limit for the displayed packages                        |
| /                          | search for the first match   |
| \                          | repeat the last search   |

Table 2.8: List of key bindings for aptitude

The file name specification of the command line and the menu prompt after pressing "l" and "/" take the aptitude regex as described below. Aptitude regex can explicitly match a package name using a string started by "~n" and followed by the package name.

### Tip

You need to press "U" to get all the installed packages upgraded to the **candidate version** in the visual interface. Otherwise only the selected packages and certain packages with versioned dependency to them are upgraded to the **candidate version**.

## 2.2.5 Package views under aptitude

In the interactive full screen mode of `aptitude(8)`, packages in the package list are displayed as the next example.

```
idA  libsmclient          -2220kB 3.0.25a-1 3.0.25a-2
```

Here, this line means from the left as the following.

- The "current state" flag (the first letter)
- The "planned action" flag (the second letter)
- The "automatic" flag (the third letter)
- The Package name
- The change in disk space usage attributed to "planned action"
- The current version of the package
- The candidate version of the package

---

### Tip

The full list of flags are given at the bottom of **Help** screen shown by pressing "?".

---

The **candidate version** is chosen according to the current local preferences (see `apt_preferences(5)` and Section [2.7.7](#)).

Several types of package views are available under the menu "Views".

| view                  | description of view  |
|-----------------------|--|
| Package View          | see Table <a href="#">2.10</a> (default)   |
| Audit Recommendations | list packages which are recommended by some installed packages but not yet installed |
| Flat Package List     | list packages without categorization (for use with regex)                            |
| Debtags Browser       | list packages categorized according to their <a href="#">debtags</a> entries         |
| Source Package View   | list packages grouped by source packages   |

Table 2.9: List of views for aptitude

---

### Note

Please help us [improving tagging packages with debtags!](#)

---

The standard "Package View" categorizes packages somewhat like `dselect` with few extra features.

---

### Tip

Tasks view can be used to cherry pick packages for your task.

---



| category                              | description of view  |
|---------------------------------------|--|
| Upgradable Packages                   | list packages organized as section → area → package                |
| New Packages                          | , ,  |
| Installed Packages                    | , ,  |
| Not Installed Packages                | , ,  |
| Obsolete and Locally Created Packages | , ,  |
| Virtual Packages                      | list packages with the same function                               |
| Tasks                                 | list packages with different functions generally needed for a task |

Table 2.10: The categorization of standard package views

## 2.2.6 Search method options with aptitude

Aptitude offers several options for you to search packages using its regex formula.

- Shell commandline:
  - "aptitude search '*aptitude\_regex*'" to list installation status, package name and short description of matching packages
  - "aptitude show '*package\_name*'" to list detailed description of the package
- Interactive full screen mode:
  - "l" to limit package view to matching packages
  - "/" for search to a matching package
  - "\" for backward search to a matching package
  - "n" for find-next
  - "N" for find-next (backward)

---

### Tip

The string for *package\_name* is treated as the exact string match to the package name unless it is started explicitly with "~" to be the regex formula.

---

## 2.2.7 The aptitude regex formula

The aptitude regex formula is mutt-like extended **ERE** (see Section 1.6.2) and the meanings of the aptitude specific special match rule extensions are as follows.

- The regex part is the same **ERE** as the one used in typical Unix-like text tools using "^", ".", "\*", "\$" etc. as in `egrep(1)`, `awk(1)` and `perl(1)`.
- The dependency *type* is one of (depends, predepends, recommends, suggests, conflicts, replaces, provides) specifying the package interrelationship.
- The default dependency *type* is "depends".

---

### Tip

When *regex\_pattern* is a null string, place "~T" immediately after the command.

---

Here are some short cuts.

---

| description of the extended match rule   | regex formula   |
|--|---|
| match on package name  | <code>~nregex_name</code>   |
| match on description   | <code>~dregex_description</code>  |
| match on task name   | <code>~tregex_task</code>   |
| match on debtag  | <code>~Gregex_debtag</code>   |
| match on maintainer  | <code>~mregex_maintainer</code>   |
| match on package section   | <code>~sregex_section</code>  |
| match on package version   | <code>~Vregex_version</code>  |
| match archive  | <code>~A{trixie, forky, sid}</code>                                     |
| match origin   | <code>~O{debian, ...}</code>  |
| match priority   | <code>~p{extra, important, optional, required, standard}</code>         |
| match essential packages   | <code>~E</code>   |
| match virtual packages   | <code>~v</code>   |
| match new packages   | <code>~N</code>   |
| match with pending action  | <code>~a{install, upgrade, downgrade, remove, purge, hold, keep}</code> |
| match installed packages   | <code>~i</code>   |
| match installed packages with <b>A</b> -mark<br>(auto installed packages)                                | <code>~M</code>   |
| match installed packages without <b>A</b> -mark<br>(administrator selected packages)                     | <code>~i!~M</code>  |
| match installed and upgradable packages  | <code>~U</code>   |
| match removed but not purged packages  | <code>~c</code>   |
| match removed, purged or<br>can-be-removed packages  | <code>~g</code>   |
| match packages declaring a broken<br>dependency  | <code>~b</code>   |
| match packages declaring broken<br>dependency of <i>type</i>   | <code>~Btype</code>   |
| match <i>pattern</i> packages declaring<br>dependency of <i>type</i>                                     | <code>~D[type:]pattern</code>   |
| match <i>pattern</i> packages declaring broken<br>dependency of <i>type</i>                              | <code>~DB[type:]pattern</code>  |
| match packages to which the <i>pattern</i><br>matching package declares dependency<br><i>type</i>        | <code>~R[type:]pattern</code>   |
| match packages to which the <i>pattern</i><br>matching package declares broken<br>dependency <i>type</i> | <code>~RB[type:]pattern</code>  |
| match packages to which some other<br>installed packages depend on                                       | <code>~R~i</code>   |
| match packages to which no other installed<br>packages depend on   | <code>!~R~i</code>  |
| match packages to which some other<br>installed packages depend or recommend<br>on                       | <code>~R~i ~Rrecommends:~i</code>                                       |
| match <i>pattern</i> package with filtered version   | <code>~S filter pattern</code>  |
| match all packages (true)  | <code>~T</code>   |
| match no packages (false)  | <code>~F</code>   |

Table 2.11: List of the aptitude regex formula

- `"~Pterm" == "~Dprovides:term"`
- `"~Cterm" == "~Dconflicts:term"`
- `"...~W term" == "(...|term)"`

Users familiar with `mutt` pick up quickly, as `mutt` was the inspiration for the expression syntax. See "SEARCHING, LIMITING, AND EXPRESSIONS" in the "User's Manual" `/usr/share/doc/aptitude/README`.

---

#### Note

With the lenny version of `aptitude(8)`, the new **long form** syntax such as `"?broken"` may be used for regex matching in place for its old **short form** equivalent `"~b"`. Now space character `" "` is considered as one of the regex terminating character in addition to tilde character `"~"`. See "User's Manual" for the new **long form** syntax.

---

## 2.2.8 Dependency resolution of aptitude

The selection of a package in `aptitude` not only pulls in packages which are defined in its `"Depends:"` list but also defined in the `"Recommends:"` list if the menu `"F10 → Options → Preferences → Dependency handling"` is set accordingly. These auto installed packages are removed automatically if they are no longer needed under `aptitude`.

The flag controlling the "auto install" behavior of the `aptitude` command can also be manipulated using the `apt-mark(8)` command from the `apt` package.

## 2.2.9 Package activity logs

You can check package activity history in the log files.

| file                               | content  |
|------------------------------------|--|
| <code>/var/log/dpkg.log</code>     | Log of <code>dpkg</code> level activity for all package activities |
| <code>/var/log/apt/term.log</code> | Log of generic APT activity  |
| <code>/var/log/aptitude</code>     | Log of <code>aptitude</code> command activity                      |

Table 2.12: The log files for package activities

In reality, it is not so easy to get meaningful understanding quickly out from these logs. See Section [9.3.9](#) for easier way.

## 2.3 Examples of aptitude operations

Here are few examples of `aptitude(8)` operations.

### 2.3.1 Seeking interesting packages

You can seek packages which satisfy your needs with `aptitude` from the package description or from the list under "Tasks".

---

### 2.3.2 Listing packages with regex matching on package names

The following command lists packages with regex matching on package names.

```
$ aptitude search '~n(pam|nss).*ldap'
p libnss-ldap - NSS module for using LDAP as a naming service
p libpam-ldap - Pluggable Authentication Module allowing LDAP interfaces
```

This is quite handy for you to find the exact name of a package.

### 2.3.3 Browsing with the regex matching

The regex "~dipv6" in the "New Flat Package List" view with "l" prompt, limits view to packages with the matching description and let you browse their information interactively.

### 2.3.4 Purging removed packages for good

You can purge all remaining configuration files of removed packages.

Check results of the following command.

```
# aptitude search '~c'
```

If you think listed packages are OK to be purged, execute the following command.

```
# aptitude purge '~c'
```

You may want to do the similar in the interactive mode for fine grained control.

You provide the regex "~c" in the "New Package View" view with "l" prompt. This limits the package view only to regex matched packages, i.e., "removed but not purged". All these regex matched packages can be shown by pressing "[" at top level headings.

Then you press "\_" at top level headings such as "Not Installed Packages". Only regex matched packages under the heading are marked to be purged by this. You can exclude some packages to be purged by pressing "=" interactively for each of them.

This technique is quite handy and works for many other command keys.

### 2.3.5 Tidying auto/manual install status

Here is how I tidy auto/manual install status for packages (after using non-aptitude package installer etc.).

1. Start aptitude in interactive mode as root.
  2. Type "u", "U", "f" and "g" to update and upgrade package list and packages.
  3. Type "l" to enter the package display limit as "~i(~R~i|~Rrecommends:~i)" and type "M" over "Installed Packages" as auto installed.
  4. Type "l" to enter the package display limit as "~prequired|~pimportant|~pstandard|~E" and type "m" over "Installed Packages" as manual installed.
  5. Type "l" to enter the package display limit as "~i!~M" and remove unused package by typing "-" over each of them after exposing them by typing "[" over "Installed Packages".
  6. Type "l", to enter the package display limit as "~i"; then type "m" over "Tasks", to mark that packages as manual installed.
-

7. Exit `aptitude`.
8. Start `"apt-get -s autoremove | less"` as root to check what are not used.
9. Restart `aptitude` in interactive mode and mark needed packages as "m".
10. Restart `"apt-get -s autoremove | less"` as root to recheck REMOVED contain only expected packages.
11. Start `"apt-get autoremove | less"` as root to autoremove unused packages.

The "m" action over "Tasks" is an optional one to prevent mass package removal situation in future.

### 2.3.6 System wide upgrade

---

#### Note

When moving to a new release etc, you should consider to perform a clean installation of new system even though Debian is upgradable as described below. This provides you a chance to remove garbages collected and exposes you to the best combination of latest packages. Of course, you should make a full backup of system to a safe place (see Section 10.2) before doing this. I recommend to make a dual boot configuration using different partition to have the smoothest transition.

---

You can perform system wide upgrade to a newer release by changing contents of **the source list** pointing to a new release and running the `"apt update; apt dist-upgrade"` command.

To upgrade from stable to testing or unstable during the trixie-as-stable release cycle, you replace "trixie" in **the source list** example of Section 2.1.5 with "forky" or "sid".

In reality, you may face some complications due to some package transition issues, mostly due to package dependencies. The larger the difference of the upgrade, the more likely you face larger troubles. For the transition from the old stable to the new stable after its release, you can read its new [Release Notes](#) and follow the exact procedure described in it to minimize troubles.

When you decide to move from stable to testing before its formal release, there are no [Release Notes](#) to help you. The difference between stable and testing could have grown quite large after the previous stable release and makes upgrade situation complicated.

You should make precautionary moves for the full upgrade while gathering latest information from mailing list and using common senses.

1. Read previous "Release Notes".
  2. Backup entire system (especially data and configuration information).
  3. Have bootable media handy for broken bootloader.
  4. Inform users on the system well in advance.
  5. Record upgrade activity with `script(1)`.
  6. Apply "unmarkauto" to required packages, e.g., `"aptitude unmarkauto vim"`, to prevent removal.
  7. Minimize installed packages to reduce chance of package conflicts, e.g., remove desktop task packages.
  8. Remove the `"/etc/apt/preferences"` file (disable **apt-pinning**).
  9. Try to upgrade step wise: `oldstable` → `stable` → `testing` → `unstable`.
  10. Update **the source list** to point to new archive only and run `"aptitude update"`.
  11. Install, optionally, new **core packages** first, e.g., `"aptitude install perl"`.
-

12. Run the "apt-get -s dist-upgrade" command to assess impact.
13. Run the "apt-get dist-upgrade" command at last.

**Caution**

It is not wise to skip major Debian release when upgrading between stable releases.

---

**Caution**

In previous "Release Notes", GCC, Linux Kernel, initrd-tools, Glibc, Perl, APT tool chain, etc. have required some special attention for system wide upgrade.

---

**Caution**

"Release Notes" may not cover all possible cases. If you change low level configurations, your next upgrade may fail badly as "... segfault after upgrade ...".

---

For daily upgrade in unstable, see Section [2.4.3](#).

## 2.4 Advanced package management operations

### 2.4.1 Advanced package management operations with commandline

Here are list of other package management operations for which aptitude is too high-level or lacks required functionalities.

---

**Note**

For a package with the [multi-arch](#) feature, you may need to specify the architecture name for some commands. For example, use "dpkg -L libglb2.0-0:amd64" to list contents of the libglb2.0-0 package for the amd64 architecture.

---

**Caution**

Lower level package tools such as "dpkg -i ..." and "debinstall ..." should be carefully used by the system administrator. It does not automatically take care required package dependencies. Dpkg's commandline options "--force-all" and similar (see dpkg(1)) are intended to be used by experts only. Using them without fully understanding their effects may break your whole system.

---

Please note the following.

- All system configuration and installation commands require to be run from root.
  - Unlike aptitude which uses regex (see Section [1.6.2](#)), other package management commands use pattern like shell glob (see Section [1.5.6](#)).
  - apt-file(1) provided by the apt-file package must run "apt-file update" in advance.
-

| command   | action  |
|---|---|
| COLUMNS=120 dpkg -l<br><i>package_name_pattern</i>                | list status of an installed package for the bug report  |
| dpkg -L <i>package_name</i>                                       | list contents of an installed package   |
| dpkg -L <i>package_name</i>   egrep<br>'/usr/share/man/man.*/.+'  | list manpages for an installed package  |
| dpkg -S <i>file_name_pattern</i>                                  | list installed packages which have matching file name   |
| apt-file search<br><i>file_name_pattern</i>                       | list packages in archive which have matching file name  |
| apt-file list<br><i>package_name_pattern</i>                      | list contents of matching packages in archive   |
| dpkg-reconfigure <i>package_name</i>                              | reconfigure the exact package   |
| dpkg-reconfigure -p low<br><i>package_name</i>                    | reconfigure the exact package with the most detailed question   |
| configure-debian  | reconfigure packages from the full screen menu  |
| dpkg --audit  | audit system for partially installed packages   |
| dpkg --configure -a   | configure all partially installed packages  |
| apt-cache policy<br><i>binary_package_name</i>                    | show available version, priority, and archive information of a binary package   |
| apt-cache madison <i>package_name</i>                             | show available version, archive information of a package  |
| apt-cache showsrc<br><i>binary_package_name</i>                   | show source package information of a binary package   |
| apt-get build-dep <i>package_name</i>                             | install required packages to build package  |
| aptitude build-dep <i>package_name</i>                            | install required packages to build package  |
| apt-get source <i>package_name</i>                                | download a source (from standard archive)   |
| dget <i>URL for dsc file</i>                                      | download a source packages (from other archive)   |
| dpkg-source -x<br><i>package_name_version-debian.revision.dsc</i> | build a source tree from a set of source packages<br>( <i>on .dsc, tar.gz</i> and <i>"*.debian.tar.gz"/"*.diff.gz"</i> )    |
| debuild binary  | build package(s) from a local source tree   |
| make-kpkg kernel_image  | build a kernel package from a kernel source tree  |
| make-kpkg --initrd kernel_image                                   | build a kernel package from a kernel source tree with initramfs enabled   |
| dpkg -i<br><i>package_name_version-debian.revision_arch.deb</i>   | install a local package to the system   |
| apt install<br><i>/path/to/package_filename.deb</i>               | install a local package to the system, meanwhile try to resolve dependency automatically                                    |
| debi<br><i>package_name_version-debian.revision_arch.dsc</i>      | install local package(s) to the system  |
| dpkg --get-selections '*'<br>>selection.txt                       | save dpkg level package selection state information   |
| dpkg --set-selections<br><selection.txt                           | set dpkg level package selection state information  |
| echo <i>package_name</i> hold   dpkg<br>--set-selections          | set dpkg level package selection state for a package to <b>hold</b><br>(equivalent to "aptitude hold <i>package_name</i> ") |

Table 2.13: List of advanced package management operations

- `configure-debian(8)` provided by the `configure-debian` package runs `dpkg-reconfigure(8)` as its backend.
- `dpkg-reconfigure(8)` runs package scripts using `debconf(1)` as its backend.
- "`apt-get build-dep`", "`apt-get source`" and "`apt-cache showsrc`" commands require "`deb-src`" entry in **the source list**.
- `dget(1)`, `debuild(1)`, and `debi(1)` require `devscripts` package.
- See (re)packaging procedure using "`apt-get source`" in Section 2.7.13.
- `make-kpkg` command requires the `kernel-package` package (see Section 9.10).
- See Section 12.9 for general packaging.

## 2.4.2 Verification of installed package files

The installation of `debsums` enables verification of installed package files against MD5sum values in the `/var/lib/dpkg/info` file with `debsums(1)`. See Section 10.3.5 for how MD5sum works.

---

### Note

Because MD5sum database may be tampered by the intruder, `debsums(1)` is of limited use as a security tool. It is only good for checking local modifications by the administrator or damage due to media errors.

---

## 2.4.3 Safeguarding for package problems

Many users prefer to follow the **testing** (or **unstable**) releases of the Debian system for its new features and packages. This makes the system more prone to be hit by the critical package bugs.

The installation of the `apt-listbugs` package safeguards your system against critical bugs by checking Debian BTS automatically for critical bugs when upgrading with APT system.

The installation of the `apt-listchanges` package provides important news in "`NEWS.Debian`" when upgrading with APT system.

## 2.4.4 Searching on the package meta data

Although visiting Debian site <https://packages.debian.org/> facilitates easy ways to search on the package meta data these days, let's look into more traditional ways.

The `grep-dctrl(1)`, `grep-status(1)`, and `grep-available(1)` commands can be used to search any file which has the general format of a Debian package control file.

The "`dpkg -S file_name_pattern`" can be used to search package names which contain files with the matching name installed by `dpkg`. But this overlooks files created by the maintainer scripts.

If you need to make more elaborate search on the `dpkg` meta data, you need to run "`grep -e regex_pattern *`" command in the `/var/lib/dpkg/info/` directory. This makes you search words mentioned in package scripts and installation query texts.

If you wish to look up package dependency recursively, you should use `apt-rdepends(8)`.

## 2.5 Debian package management internals

Let's learn how the Debian package management system works internally. This should help you to create your own solution to some package problems.

---



## 2.5.1 Archive meta data

Meta data files for each distribution are stored under "`dist/codename`" on each Debian mirror sites, e.g., "`http://deb.debian.org/debian/dists/unstable`". Its archive structure can be browsed by the web browser. There are 6 types of key meta data.

| file                          | location  | content   |
|-------------------------------|---|---|
| Release                       | top of distribution   | archive description and integrity information                     |
| Release.gpg                   | top of distribution   | signature file for the "Release" file signed with the archive key |
| Contents- <i>architecture</i> | top of distribution   | list of all files for all the packages in the pertinent archive   |
| Release                       | top of each distribution/area/architecture combination        | archive description used for the rule of apt_preferences(5)       |
| Packages                      | top of each distribution/area/binary-architecture combination | concatenated debian/control for binary packages                   |
| Sources                       | top of each distribution/area/source combination              | concatenated debian/control for source packages                   |

Table 2.14: The content of the Debian archive meta data

In the recent archive, these meta data are stored as the compressed and differential files to reduce network traffic.

## 2.5.2 Top level "Release" file and authenticity

### Tip

The top level "Release" file is used for signing the archive under the **secure APT** system.

Each suite of the Debian archive has a top level "Release" file, e.g., "`http://deb.debian.org/debian/dists/unstable`" as follows.

```
Origin: Debian
Label: Debian
Suite: unstable
Codename: sid
Date: Sat, 14 May 2011 08:20:50 UTC
Valid-Until: Sat, 21 May 2011 08:20:50 UTC
Architectures: alpha amd64 armel hppa hurd-i386 i386 ia64 kfreebsd-amd64 kfreebsd-i386 mips ←
               mipsel powerpc s390 sparc
Components: main contrib non-free
Description: Debian x.y Unstable - Not Released
MD5Sum:
  bdc8fa4b3f5e4a715dd0d56d176fc789 18876880 Contents-alpha.gz
  9469a03c94b85e010d116aeeab9614c0 19441880 Contents-amd64.gz
  3d68e206d7faa3aded660dc0996054fe 19203165 Contents-armel.gz
...
```

### Note

Here, you can find my rationale to use the "suite", and "codename" in Section 2.1.5. The "distribution" is used when referring to both "suite" and "codename". All archive "area" names offered by the archive are listed under "Components".

The integrity of the top level "Release" file is verified by cryptographic infrastructure called the [secure apt](#) as described in [apt - secure\(8\)](#).

- The cryptographic signature file "Release.gpg" is created from the authentic top level "Release" file and the secret Debian archive key.
- The public Debian archive keys are locally installed by the latest `debian-archive-keyring` package.
- The **secure APT** system automatically verifies the integrity of the downloaded top level "Release" file cryptographically by this "Release.gpg" file and the locally installed public Debian archive keys.
- The integrity of all the "Packages" and "Sources" files are verified by using MD5sum values in its top level "Release" file. The integrity of all package files are verified by using MD5sum values in the "Packages" and "Sources" files. See [debsums\(1\)](#) and [Section 2.4.2](#).
- Since the cryptographic signature verification is a much more CPU intensive process than the MD5sum value calculation, use of MD5sum value for each package while using cryptographic signature for the top level "Release" file provides [the good security with the performance](#) (see [Section 10.3](#)).

If the **source list** entry specifies the "signed-by" option, the integrity of its downloaded top level "Release" file is verified using specified public key. This is useful when the **source list** contains non-Debian archives.

---

**Tip**

The use of `apt - key(8)` command for APT key management is deprecated.

---

Also, you can manually verify the integrity of the "Release" file with the "Release.gpg" file and the public Debian archive key posted on [ftp-master.debian.org](http://ftp-master.debian.org) using `gpg`.

### 2.5.3 Archive level "Release" files

---

**Tip**

The archive level "Release" files are used for the rule of `apt_preferences(5)`.

---

There are archive level "Release" files for all archive locations specified by the **source list**, such as "`http://deb.debian.org/debian/dists/sid/main/binary-amd64/Release`" as follows.

```
Archive: unstable
Origin: Debian
Label: Debian
Component: main
Architecture: amd64
```

**Caution**

For "Archive:" stanza, suite names ("stable", "testing", "unstable", ...) are used in [the Debian archive](#) while codenames ("trusty", "xenial", "artful", ...) are used in [the Ubuntu archive](#).

---

For some archives, such as `experimental`, and `trixie-backports`, which contain packages which should not be installed automatically, there is an extra line, e.g., "`http://deb.debian.org/debian/dists/experimental/main/b`" as follows.

---

```
Archive: experimental
Origin: Debian
Label: Debian
NotAutomatic: yes
Component: main
Architecture: amd64
```

Please note that for normal archives without "NotAutomatic: yes", the default Pin-Priority value is 500, while for special archives with "NotAutomatic: yes", the default Pin-Priority value is 1 (see `apt_preferences(5)` and Section 2.7.7).

## 2.5.4 Fetching of the meta data for the package

When APT tools, such as `aptitude`, `apt-get`, `synaptic`, `apt-file`, `auto-apt`, ... are used, we need to update the local copies of the meta data containing the Debian archive information. These local copies have following file names corresponding to the specified distribution, area, and architecture names in **the source list** (see Section 2.1.5).

- `/var/lib/apt/lists/deb.debian.org_debian_dists_distribution_Release`
- `/var/lib/apt/lists/deb.debian.org_debian_dists_distribution_Release.gpg`
- `/var/lib/apt/lists/deb.debian.org_debian_dists_distribution_area_binary-architecture_Packages`
- `/var/lib/apt/lists/deb.debian.org_debian_dists_distribution_area_source_Sources`
- `/var/cache/apt/apt-file/deb.debian.org_debian_dists_distribution_Contents-architecture.gpg` (for `apt-file`)

First 4 types of files are shared by all the pertinent APT commands and updated from command line by "`apt-get update`" or "`aptitude update`". The "Packages" meta data are updated if the "deb" is specified in **the source list**. The "Sources" meta data are updated if the "deb-src" is specified in **the source list**.

The "Packages" and "Sources" meta data contain "Filename:" stanza pointing to the file location of the binary and source packages. Currently, these packages are located under the "pool/" directory tree for the improved transition over the releases.

Local copies of "Packages" meta data can be interactively searched with the help of `aptitude`. The specialized search command `grep-dctrl(1)` can search local copies of "Packages" and "Sources" meta data.

Local copy of "Contents-architecture" meta data can be updated by "`apt-file update`" and its location is different from other 4 ones. See `apt-file(1)`. (The `auto-apt` uses different location for local copy of "Contents-architecture" as default.)

## 2.5.5 The package state for APT

In addition to the remotely fetched meta data, the APT tool after Lenny stores its locally generated installation state information in the `/var/lib/apt/extended_states` which is used by all APT tools to track all auto installed packages.

## 2.5.6 The package state for aptitude

In addition to the remotely fetched meta data, the `aptitude` command stores its locally generated installation state information in the `/var/lib/aptitude/pkgstates` which is used only by it.

## 2.5.7 Local copies of the fetched packages

All the remotely fetched packages via APT mechanism are stored in the `/var/cache/apt/archives` until they are cleaned.

This cache file cleaning policy for aptitude can be set under "Options" → "Preferences" and it may be forced by its menu "Clean package cache" or "Clean obsolete files" under "Actions".

## 2.5.8 Debian package file names

Debian package files have particular name structures.

| package type   | name structure  |
|--|---|
| The binary package (a.k.a deb)                       | <i>package-name_upstream-version-debian.revision_architecture</i>           |
| The binary package for debian-installer (a.k.a udeb) | <i>package-name_upstream-version-debian.revision_architecture-installer</i> |
| The source package (upstream source)                 | <i>package-name_upstream-version-debian.revision.orig.tar.gz</i>            |
| The 1.0 source package (Debian changes)              | <i>package-name_upstream-version-debian.revision.diff.gz</i>                |
| The 3.0 (quilt) source package (Debian changes)      | <i>package-name_upstream-version-debian.revision.debian.tar.gz</i>          |
| The source package (description)                     | <i>package-name_upstream-version-debian.revision.dsc</i>                    |

Table 2.15: The name structure of Debian packages

### Tip

Here only the basic source package formats are described. See more on `dpkg-source(1)`.

| name component          | usable characters (ERE regex)    | existence |
|-------------------------|----------------------------------|-----------|
| <i>package-name</i>     | <code>[a-z0-9][-a-z0-9.]+</code> | required  |
| <i>epoch:</i>           | <code>[0-9]+:</code>             | optional  |
| <i>upstream-version</i> | <code>[-a-zA-Z0-9.+:]+</code>    | required  |
| <i>debian.revision</i>  | <code>[a-zA-Z0-9.+~]+</code>     | optional  |

Table 2.16: The usable characters for each component in the Debian package names

### Note

You can check package version order by `dpkg(1)`, e.g., `"dpkg --compare-versions 7.0 gt 7.~pre1 ; echo $?"`.

### Note

[The debian-installer \(d-i\)](#) uses udeb as the file extension for its binary package instead of normal deb. An udeb package is a stripped down deb package which removes few non-essential contents such as documentation to save space while relaxing the package policy requirements. Both deb and udeb packages share the same package structure. The "u" stands for micro.

2.5.9 The dpkg command

dpkg(1) is the lowest level tool for the Debian package management. This is very powerful and needs to be used with care.

While installing package called "*package\_name*", dpkg process it in the following order.

- 1. Unpack the deb file ("ar -x" equivalent)
- 2. Execute "*package\_name.preinst*" using debconf(1)
- 3. Install the package content to the system ("tar -x" equivalent)
- 4. Execute "*package\_name.postinst*" using debconf(1)

The debconf system provides standardized user interaction with I18N and L10N (Chapter 8) supports.

| file   | description of contents   |
|--|---|
| /var/lib/dpkg/info/ <i>package_name</i> .control   | list of configuration files. (user modifiable)                                |
| /var/lib/dpkg/info/ <i>package_name</i> .list      | list of files and directories installed by the package                        |
| /var/lib/dpkg/info/ <i>package_name</i> .md5sums   | list of MD5 hash values for files installed by the package                    |
| /var/lib/dpkg/info/ <i>package_name</i> .preinst   | package script to be run before the package installation                      |
| /var/lib/dpkg/info/ <i>package_name</i> .postinst  | package script to be run after the package installation                       |
| /var/lib/dpkg/info/ <i>package_name</i> .prerm     | package script to be run before the package removal                           |
| /var/lib/dpkg/info/ <i>package_name</i> .postrm    | package script to be run after the package removal                            |
| /var/lib/dpkg/info/ <i>package_name</i> .conffiles | package script for debconf system   |
| /var/lib/dpkg/alternatives/ <i>package_name</i>    | the alternative information used by the update-alternatives command           |
| /var/lib/dpkg/available                            | the availability information for all the package                              |
| /var/lib/dpkg/diversions                           | the diversions information used by dpkg(1) and set by dpkg-divert(8)          |
| /var/lib/dpkg/statoverride                         | the stat override information used by dpkg(1) and set by dpkg-statoverride(8) |
| /var/lib/dpkg/status                               | the status information for all the packages                                   |
| /var/lib/dpkg/status-old                           | the first-generation backup of the "var/lib/dpkg/status" file                 |
| /var/backups/dpkg.status*                          | the second-generation backup and older ones of the "var/lib/dpkg/status" file |

Table 2.17: The notable files created by dpkg

The "status" file is also used by the tools such as dpkg(1), "dselect update" and "apt-get -u dselect-upgrade".

The specialized search command grep-dctrl(1) can search the local copies of "status" and "available" meta data.

Tip

In the [debian-installer](#) environment, the udpkg command is used to open udeb packages. The udpkg command is a stripped down version of the dpkg command.

2.5.10 The update-alternatives command

The Debian system has mechanism to install somewhat overlapping programs peacefully using update-alternatives(1). For example, you can make the vi command select to run vim while installing both vim and nvi packages.

```
$ ls -l $(type -p vi)
lrwxrwxrwx 1 root root 20 2007-03-24 19:05 /usr/bin/vi -> /etc/alternatives/vi
$ sudo update-alternatives --display vi
...
$ sudo update-alternatives --config vi
  Selection    Command
-----
      1        /usr/bin/vim
*+    2        /usr/bin/nvi

Enter to keep the default[*], or type selection number: 1
```

The Debian alternatives system keeps its selection as symlinks in `/etc/alternatives/`. The selection process uses corresponding file in `/var/lib/dpkg/alternatives/`.

### 2.5.11 The `dpkg-statoverride` command

**Stat overrides** provided by the `dpkg-statoverride(8)` command are a way to tell `dpkg(1)` to use a different owner or mode for a **file** when a package is installed. If `"- -update"` is specified and file exists, it is immediately set to the new owner and mode.



#### Caution

The direct alteration of owner or mode for a **file** owned by the package using `chmod` or `chown` commands by the system administrator is reset by the next upgrade of the package.

---

#### Note

I use the word **file** here, but in reality this can be any filesystem object that `dpkg` handles, including directories, devices, etc.

---

### 2.5.12 The `dpkg-divert` command

File **diversions** provided by the `dpkg-divert(8)` command are a way of forcing `dpkg(1)` not to install a file into its default location, but to a **diverted** location. The use of `dpkg-divert` is meant for the package maintenance scripts. Its casual use by the system administrator is deprecated.

## 2.6 Recovery from a broken system

When running `testing` or unstable system, the administrator is expected to recover from broken package management situation.



#### Caution

Some methods described here are high risk actions. You have been warned!

---

### 2.6.1 Incompatibility with old user configuration

If a desktop GUI program experienced instability after significant upstream version upgrade, you should suspect interference with old local configuration files created by it. If it is stable under a newly created user account, this hypothesis is confirmed. (This is a bug of packaging and usually avoided by the packager.)

To recover stability, you should move corresponding local configuration files and restart the GUI program. You may need to read old configuration file contents to recover configuration information later. (Do not erase them too quickly.)

### 2.6.2 Caching errors of the package data

Caching errors of the package data cause intriguing errors, such as "GPG error: ... invalid: BADSIG ..." with APT.

You should remove all cached data by "sudo rm -rf /var/lib/apt/\* " and try again. (If apt-cacher-ng is used, you should also run "sudo rm -rf /var/cache/apt-cacher-ng/\* ".)

### 2.6.3 Rescue with the dpkg command

Since dpkg is very low level package tool, it can function without network connection.

Let's assume foo package was broken and needs to be fixed.

You may still find cached copies of older bug free version of foo package in the package cache directory: "/var/cache/apt. (If not, you can download it from archive of <https://snapshot.debian.org/> or copy it from package cache of a functioning machine.)

If you can boot the system, you may install it by the following command.

```
# dpkg -i /path/to/foo_old_version_arch.deb
```

If attempting to install a package this way fails due to some dependency violations and you really need to do this as the last resort, you can override dependency using dpkg's "--ignore-depends", "--force-depends" and other options. If you do this, you need to make serious effort to restore proper dependency later. See dpkg(8) for details.

---

#### Note

If your system is seriously broken, you should make a full backup of system to a safe place (see Section 10.2) and should perform a clean installation. This is less time consuming and produces better results in the end.

---

---

#### Tip

If system breakage is minor, you may alternatively downgrade the whole system as in Section 2.7.11 using the higher level APT system.

---

### 2.6.4 Failed installation due to missing dependencies

If you force to install a package by "sudo dpkg -i ..." to a system without all dependency packages installed, the package installation will fail as partially installed.

You should install all dependency packages by repeatedly using "sudo dpkg -i ..." or by using:

```
# apt --fix-broken install
```

Then, configure all partially installed packages with the following command.

```
# dpkg --configure -a
```

---

## 2.6.5 Different packages with overlapped files

Archive level package management systems, such as `aptitude(8)` or `apt-get(1)`, do not even try to install packages with overlapped files using package dependencies (see Section 2.1.7).

Errors by the package maintainer or deployment of inconsistently mixed source of archives (see Section 2.7.6) by the system administrator may create a situation with incorrectly defined package dependencies. When you install a package with overlapped files using `aptitude(8)` or `apt-get(1)` under such a situation, `dpkg(1)` which unpacks package ensures to return error to the calling program without overwriting existing files.



### Caution

The use of third party packages introduces significant system risks via maintainer scripts which are run with root privilege and can do anything to your system. The `dpkg(1)` command only protects against overwriting by the unpacking.

---

You can work around such broken installation by removing the old offending package, *old-package*, first.

```
$ sudo dpkg -P old-package
```

## 2.6.6 Fixing broken package script

When a command in the package script returns error for some reason and the script exits with error, the package management system aborts their action and ends up with partially installed packages. When a package contains bugs in its removal scripts, the package may become impossible to remove and quite nasty.

For the package script problem of "*package\_name*", you should look into following package scripts.

- `/var/lib/dpkg/info/package_name.preinst`
- `/var/lib/dpkg/info/package_name.postinst`
- `/var/lib/dpkg/info/package_name.prerm`
- `/var/lib/dpkg/info/package_name.postrm`

Edit the offending package script from the root using following techniques.

- disable the offending line by preceding "#"
- force to return success by appending the offending line with "`|| true`"

Then, configure all partially installed packages with the following command.

```
# dpkg --configure -a
```

## 2.6.7 Recovering package selection data

If `/var/lib/dpkg/status` becomes corrupt for any reason, the Debian system loses package selection data and suffers severely. Look for the old `/var/lib/dpkg/status` file at `/var/lib/dpkg/status-old` or `/var/backups/`. Keeping `/var/backups/` in a separate partition may be a good idea since this directory contains lots of important system data.

For serious breakage, I recommend to make fresh re-install after making backup of the system. Even if everything in `/var/` is gone, you can still recover some information from directories in `/usr/share/doc/` to guide your new installation.

Reinstall minimal (desktop) system.

---



```
# mkdir -p /path/to/old/system
```

Mount old system at `"/path/to/old/system/"`.

```
# cd /path/to/old/system/usr/share/doc
# ls -1 >~/ls1.txt
# cd /usr/share/doc
# ls -1 >~/ls1.txt
# cd
# sort ls1.txt | uniq | less
```

Then you are presented with package names to install. (There may be some non-package names such as `"texmf"`.)

## 2.7 Tips for the package management

For simplicity, **the source list** examples in this section are presented as `"/etc/apt/sources.list"` in one-line-style after the `trixie` release.

### 2.7.1 Who uploaded the package?

Although the maintainer name listed in `"/var/lib/dpkg/available"` and `"/usr/share/doc/package_name/changelog"` provide some information on "who is behind the packaging activity", the actual uploader of the package is somewhat obscure. `who-uploads(1)` in the `devscripts` package identifies the actual uploader of Debian source packages.

### 2.7.2 Limiting download bandwidth for APT

If you want to limit the download bandwidth for APT to e.g. 800Kib/sec (=100kiB/sec), you should configure APT with its configuration parameter as the following.

```
APT::Acquire::http::DL-Limit "800";
```

### 2.7.3 Automatic download and upgrade of packages

The `apt` package comes with its own cron script `"/etc/cron.daily/apt"` to support the automatic download of packages. This script can be enhanced to perform the automatic upgrade of packages by installing the `unattended-upgrades` package. These can be customized by parameters in `"/etc/apt/apt.conf.d/02backup"` and `"/etc/apt/apt.conf.d/02unattended-upgrades"` as described in `"/usr/share/doc/unattended-upgrades/README"`.

The `unattended-upgrades` package is mainly intended for the security upgrade for the `stable` system. If the risk of breaking an existing `stable` system by the automatic upgrade is smaller than that of the system broken by the intruder using its security hole which has been closed by the security update, you should consider using this automatic upgrade with configuration parameters as the following.

```
APT::Periodic::Update-Package-Lists "1";
APT::Periodic::Download-Upgradeable-Packages "1";
APT::Periodic::Unattended-Upgrade "1";
```

If you are running an `testing` or `unstable` system, you do not want to use the automatic upgrade since it certainly breaks system some day. Even for such `testing` or `unstable` case, you may still want to download packages in advance to save time for the interactive upgrade with configuration parameters as the following.

```
APT::Periodic::Update-Package-Lists "1";
APT::Periodic::Download-Upgradeable-Packages "1";
APT::Periodic::Unattended-Upgrade "0";
```

## 2.7.4 Updates and Backports

There are [stable-updates](#) ("trixie-updates" during the trixie-as-stable release cycle) and [backports.debian.org](http://backports.debian.org) archives which provide upgrade packages for stable.

In order to use these archives, you list all required archives in the `/etc/apt/sources.list` file as the following.

```
deb http://deb.debian.org/debian/ trixie main non-free-firmware contrib non-free
deb http://security.debian.org/debian-security trixie-security main non-free-firmware ↔
  contrib non-free
deb http://deb.debian.org/debian/ trixie-updates main non-free-firmware contrib non-free
deb http://deb.debian.org/debian/ trixie-backports main non-free-firmware contrib non-free
```

There is no need to set Pin-Priority value explicitly in the `/etc/apt/preferences` file. When newer packages become available, the default configuration provides most reasonable upgrades (see Section [2.5.3](#)).

- All installed older packages are upgraded to newer ones from trixie-updates.
- Only manually installed older packages from trixie-backports are upgraded to newer ones from trixie-backports

Whenever you wish to install a package named *"package-name"* with its dependency from trixie-backports archive manually, you use following command while switching target release with `-t` option.

```
$ sudo apt-get install -t trixie-backports package-name
```



### Warning

Do not install too many packages from [backports.debian.org](http://backports.debian.org) archives. It may cause package dependency complications. See Section [2.1.11](#) for alternative solutions.

---

## 2.7.5 External package archives



### Warning

You should be aware that the external package gains the root privilege to your system. You should only use the trusted external package archive. See Section [2.1.11](#) for alternative solutions.

---

You can use secure APT with Debian-compatible external package archive by adding it to **the source list** and its archive key file into the `/etc/apt/trusted.gpg.d/` directory. See `sources.list(5)`, `apt-secure(8)` and `apt-key(8)`.

## 2.7.6 Packages from mixed source of archives without apt-pinning



### Caution

Installing packages from mixed source of archives is not supported by the official Debian distribution except for officially supported particular combinations of archives such as stable with [security updates](#) and [stable-updates](#).

---

Here is an example of operations to include specific newer upstream version packages found in unstable while tracking testing for single occasion.

---

1. Change the `/etc/apt/sources.list` file temporarily to single `unstable` entry.
2. Run `aptitude update`.
3. Run `aptitude install package-name`.
4. Recover the original `/etc/apt/sources.list` file for testing.
5. Run `aptitude update`.

You do not create the `/etc/apt/preferences` file nor need to worry about **apt-pinning** with this manual approach. But this is very cumbersome.

**Caution**

When using mixed source of archives, you must ensure compatibility of packages by yourself since the Debian does not guarantee it. If package incompatibility exists, you may break system. You must be able to judge these technical requirements. The use of mixed source of random archives is completely optional operation and its use is not something I encourage you to use.

---

General rules for installing packages from different archives are the following.

- Non-binary packages (`Architecture: all`) are **safer** to install.
  - documentation packages: no special requirements
  - interpreter program packages: compatible interpreter must be available
- Binary packages (non `Architecture: all`) usually face many road blocks and are **unsafe** to install.
  - library version compatibility (including `libc`)
  - related utility program version compatibility
  - Kernel [ABI](#) compatibility
  - C++ [ABI](#) compatibility
  - ...

---

**Note**

In order to make a package to be **safer** to install, some commercial non-free binary program packages may be provided with completely statically linked libraries. You should still check [ABI](#) compatibility issues etc. for them.

---

---

**Note**

Except to avoid broken package for a short term, installing binary packages from non-Debian archives is generally bad idea. You should seek all available alternative safer technical solutions which are compatible with your current Debian syetem (see Section [2.1.11](#)).

---

### 2.7.7 Tweaking candidate version with apt-pinning

**Warning**

Use of **apt-pinning** technique by a novice user is sure call for major troubles. You must avoid using this technique except when you absolutely need it.

---

Without the `/etc/apt/preferences` file, APT system chooses the latest available version as the **candidate version** using the version string. This is the normal state and most recommended usage of APT system. All officially supported combinations of archives do not require the `/etc/apt/preferences` file since some archives which should not be used as the automatic source of upgrades are marked as **NotAutomatic** and dealt properly.

---

**Tip**

The version string comparison rule can be verified with, e.g., `dpkg --compare-versions ver1.1 gt ver1.1~1; echo $?` (see `dpkg(1)`).

---

When you install packages from mixed source of archives (see Section 2.7.6) regularly, you can automate these complicated operations by creating the `/etc/apt/preferences` file with proper entries and tweaking the package selection rule for **candidate version** as described in `apt_preferences(5)`. This is called **apt-pinning**.

When using **apt-pinning**, you must ensure compatibility of packages by yourself since the Debian does not guarantee it. The **apt-pinning** is completely optional operation and its use is not something I encourage you to use.

Archive level Release files (see Section 2.5.3) are used for the rule of `apt_preferences(5)`. Thus **apt-pinning** works only with "suite" name for [normal Debian archives](#) and [security Debian archives](#). (This is different from [Ubuntu archives](#).) For example, you can do `Pin: release a=unstable` but can not do `Pin: release a=sid` in the `/etc/apt/preferences` file.

When you use non-Debian archive as a part of **apt-pinning**, you should check what they are intended for and also check their credibility. For example, Ubuntu and Debian are not meant to be mixed.

---

**Note**

Even if you do not create the `/etc/apt/preferences` file, you can do fairly complex system operations (see Section 2.6.3 and Section 2.7.6) without **apt-pinning**.

---

Here is a simplified explanation of **apt-pinning** technique.

The APT system chooses the highest Pin-Priority **upgrading** package from available package sources defined in the `/etc/apt/sources.list` file as the **candidate version** package. If the Pin-Priority of the package is larger than 1000, this version restriction for **upgrading** is dropped to enable downgrading (see Section 2.7.11).

Pin-Priority value of each package is defined by "Pin-Priority" entries in the `/etc/apt/preferences` file or uses its default value.

| Pin-Priority | apt-pinning effects to the package  |
|--------------|---|
| 1001         | install the package even if this constitutes a downgrade of the package                 |
| 990          | used as the default for the <b>target release</b> archive                               |
| 500          | used as the default for the <b>normal</b> archive                                       |
| 100          | used as the default for the <b>NotAutomatic</b> and <b>ButAutomaticUpgrades</b> archive |
| 100          | used for the <b>installed</b> package   |
| 1            | used as the default for the <b>NotAutomatic</b> archive                                 |
| -1           | <b>never install</b> the package even if recommended                                    |

Table 2.18: List of notable Pin-Priority values for **apt-pinning** technique.

The **target release** archive can be set by the command line option, e.g., `apt-get install -t testing some-package`.

The **NotAutomatic** and **ButAutomaticUpgrades** archive is set by archive server having its archive level Release file (see Section 2.5.3) containing both `NotAutomatic: yes` and `ButAutomaticUpgrades: yes`. The **NotAutomatic** archive is set by archive server having its archive level Release file containing only `NotAutomatic: yes`.

The **apt-pinning situation** of *package* from multiple archive sources is displayed by `apt-cache policy package`.

---

- A line started with "Package pin:" lists the package version of **pin** if association just with *package* is defined, e.g., "Package pin: 0.190".
- No line with "Package pin:" exists if no association just with *package* is defined.
- The Pin-Priority value associated just with *package* is listed right side of all version strings, e.g., "0.181 700".
- "0" is listed right side of all version strings if no association just with *package* is defined, e.g., "0.181 0".
- The Pin-Priority values of archives (defined as "Package: \*" in the "/etc/apt/preferences" file) are listed left side of all archive paths, e.g., "100 http://deb.debian.org/debian/ trixie-backports/main Packages".

## 2.7.8 Blocking packages installed by "Recommends"



### Warning

Use of **apt-pinning** technique by a novice user is sure call for major troubles. You must avoid using this technique except when you absolutely need it.

If you wish not to pull in particular packages automatically by "Recommends", you must create the "/etc/apt/preferences" file and explicitly list all those packages at the top of it as the following.

```
Package: package-1
Pin: version *
Pin-Priority: -1
```

```
Package: package-2
Pin: version *
Pin-Priority: -1
```

## 2.7.9 Tracking testing with some packages from unstable



### Warning

Use of **apt-pinning** technique by a novice user is sure call for major troubles. You must avoid using this technique except when you absolutely need it.

Here is an example of **apt-pinning** technique to include specific newer upstream version packages found in `unstable` regularly upgraded while tracking `testing`. You list all required archives in the "/etc/apt/sources.list" file as the following.

```
deb http://deb.debian.org/debian/ testing main contrib non-free
deb http://deb.debian.org/debian/ unstable main contrib non-free
deb http://security.debian.org/debian-security testing-security main contrib
```

Set the "/etc/apt/preferences" file as the following.

```
Package: *
Pin: release a=unstable
Pin-Priority: 100
```

When you wish to install a package named "*package-name*" with its dependencies from `unstable` archive under this configuration, you issue the following command which switches target release with "-t" option (Pin-Priority of `unstable` becomes 990).

```
$ sudo apt-get install -t unstable package-name
```

With this configuration, usual execution of "apt-get upgrade" and "apt-get dist-upgrade" (or "aptitude safe-upgrade" and "aptitude full-upgrade") upgrades packages which were installed from testing archive using current testing archive and packages which were installed from unstable archive using current unstable archive.

**Caution**

Be careful not to remove "testing" entry from the "/etc/apt/sources.list" file. Without "testing" entry in it, APT system upgrades packages using newer unstable archive.

---

**Tip**

I usually edit the "/etc/apt/sources.list" file to comment out "unstable" archive entry right after above operation. This avoids slow update process of having too many entries in the "/etc/apt/sources.list" file although this prevents upgrading packages which were installed from unstable archive using current unstable archive.

---

**Tip**

If "Pin-Priority: 1" is used instead of "Pin-Priority: 100" in the "/etc/apt/preferences" file, already installed packages having Pin-Priority value of 100 are not upgraded by unstable archive even if "testing" entry in the "/etc/apt/sources.list" file is removed.

---

If you wish to track particular packages in unstable automatically without initial "-t unstable" installation, you must create the "/etc/apt/preferences" file and explicitly list all those packages at the top of it as the following.

```
Package: package-1
Pin: release a=unstable
Pin-Priority: 700
```

```
Package: package-2
Pin: release a=unstable
Pin-Priority: 700
```

These set Pin-Priority value for each specific package. For example, in order to track the latest unstable version of this "Debian Reference" in English, you should have following entries in the "/etc/apt/preferences" file.

```
Package: debian-reference-en
Pin: release a=unstable
Pin-Priority: 700
```

```
Package: debian-reference-common
Pin: release a=unstable
Pin-Priority: 700
```

**Tip**

This **apt-pinning** technique is valid even when you are tracking stable archive. Documentation packages have been always safe to install from unstable archive in my experience, so far.

---

### 2.7.10 Tracking unstable with some packages from experimental

**Warning**

Use of **apt-pinning** technique by a novice user is sure call for major troubles. You must avoid using this technique except when you absolutely need it.

Here is another example of **apt-pinning** technique to include specific newer upstream version packages found in experimental while tracking unstable. You list all required archives in the `/etc/apt/sources.list` file as the following.

```
deb http://deb.debian.org/debian/ unstable main contrib non-free
deb http://deb.debian.org/debian/ experimental main contrib non-free
deb http://security.debian.org/ testing-security main contrib
```

The default Pin-Priority value for experimental archive is always 1 ( $\ll 100$ ) since it is **NotAutomatic** archive (see Section 2.5.3). There is no need to set Pin-Priority value explicitly in the `/etc/apt/preferences` file just to use experimental archive unless you wish to track particular packages in it automatically for next upgrading.

### 2.7.11 Emergency downgrading

**Warning**

Use of **apt-pinning** technique by a novice user is sure call for major troubles. You must avoid using this technique except when you absolutely need it.

**Caution**

Downgrading is not officially supported by the Debian by design. It should be done only as a part of emergency recovery process. Despite of this situation, it is known to work well in many incidents. For critical systems, you should backup all important data on the system after the recovery operation and re-install the new system from the scratch.

You may be lucky to downgrade from newer archive to older archive to recover from broken system upgrade by manipulating **candidate version** (see Section 2.7.7). This is lazy alternative to tedious actions of many `dpkg -i broken-package_old-version.deb` commands (see Section 2.6.3).

Search lines in the `/etc/apt/sources.list` file tracking unstable as the following.

```
deb http://deb.debian.org/debian/ sid main contrib non-free
```

Replace it with the following to track testing.

```
deb http://deb.debian.org/debian/ forkyl main contrib non-free
```

Set the `/etc/apt/preferences` file as the following.

```
Package: *
Pin: release a=testing
Pin-Priority: 1010
```

Run `apt-get update; apt-get dist-upgrade` to force downgrading of packages across the system.

Remove this special `/etc/apt/preferences` file after this emergency downgrading.

---

**Tip**

It is a good idea to remove (not purge!) as much packages to minimize dependency problems. You may need to manually remove and install some packages to get system downgraded. Linux kernel, bootloader, udev, PAM, APT, and networking related packages and their configuration files require special attention.

---

### 2.7.12 The equivs package

If you are to compile a program from source to replace the Debian package, it is best to make it into a real local debianized package (\*.deb) and use private archive.

If you choose to compile a program from source and to install them under "/usr/local" instead, you may need to use equivs as a last resort to satisfy the missing package dependency.

```
Package: equivs
Priority: optional
Section: admin
Description: Circumventing Debian package dependencies
 This package provides a tool to create trivial Debian packages.
 Typically these packages contain only dependency information, but they
 can also include normal installed files like other packages do.
.
 One use for this is to create a metapackage: a package whose sole
 purpose is to declare dependencies and conflicts on other packages so
 that these will be automatically installed, upgraded, or removed.
.
 Another use is to circumvent dependency checking: by letting dpkg
 think a particular package name and version is installed when it
 isn't, you can work around bugs in other packages' dependencies.
 (Please do still file such bugs, though.)
```

### 2.7.13 Porting a package to the stable system

**Caution**

There is no gurantee for the procedure descried here to work without extra manual efforts for system differ-ences.

---

For partial upgrades of the stable system, rebuilding a package within its environment using the source package is desirable. This avoids massive package upgrades due to their dependencies.

Add the following entries to the "/etc/apt/sources.list" of a stable system.

```
deb-src http://deb.debian.org/debian unstable main contrib non-free
```

Install required packages for the compilation and download the source package as the following.

```
# apt-get update
# apt-get dist-upgrade
# apt-get install fakeroot devscripts build-essential
# apt-get build-dep foo
$ apt-get source foo
$ cd foo*
```

Update some tool chain packages such as dpkg, and debhelper from the backport packages if they are required for the backporting.

Execute the following.

---



```
$ dch -i
```

Bump package version, e.g. one appended with "+bp1" in "debian/changelog"

Build packages and install them to the system as the following.

```
$ debuild
$ cd ..
# debi foo*.changes
```

### 2.7.14 Proxy server for APT

Since mirroring whole subsection of Debian archive wastes disk space and network bandwidth, deployment of a local proxy server for APT is desirable consideration when you administer many systems on LAN. APT can be configured to use generic web (http) proxy servers such as squid (see Section 6.5) as described in `apt.conf(5)` and in `/usr/share/doc/apt/examples/configure-index.gz`. The `$http_proxy` environment variable can be used to override proxy server setting in the `/etc/apt/apt.conf` file.

There are proxy tools specially for Debian archive. You should check BTS before using them.

| package                       | popcon                         | size | description  |
|-------------------------------|--------------------------------|------|--|
| <a href="#">apt-cacher</a>    | <a href="#">V:0.31, I:0.36</a> | 267  | Caching proxy for Debian package and source files (Perl program)           |
| <a href="#">apt-cacher-ng</a> | <a href="#">V:4.0, I:4.1</a>   | 1968 | Caching proxy for distribution of software packages (compiled C++ program) |

Table 2.19: List of the proxy tools specially for Debian archive



#### Caution

When Debian reorganizes its archive structure, these specialized proxy tools tend to require code rewrites by the package maintainer and may not be functional for a while. On the other hand, generic web (http) proxy servers are more robust and easier to cope with such changes.

### 2.7.15 More readings for the package management

You can learn more on the package management from following documentations.

- Primary documentations on the package management:
  - `aptitude(8)`, `dpkg(1)`, `tasksel(8)`, `apt(8)`, `apt-get(8)`, `apt-config(8)`, `apt-secure(8)`, `sources.list(5)`, `apt.conf(5)`, and `apt_preferences(5)`;
  - `/usr/share/doc/apt-doc/guide.html/index.html` and `/usr/share/doc/apt-doc/offline.html/index.html` from the `apt-doc` package; and
  - `/usr/share/doc/aptitude/html/en/index.html` from the `aptitude-doc-en` package.
- Official and detailed documentations on the Debian archive:
  - ["Debian Policy Manual Chapter 2 - The Debian Archive"](#),
  - ["Debian Developer's Reference, Chapter 4 - Resources for Debian Developers 4.6 The Debian archive"](#), and
  - ["The Debian GNU/Linux FAQ, Chapter 6 - The Debian FTP archives"](#).
- Tutorial for building of a Debian package for Debian users:
  - ["Guide for Debian Maintainers"](#).

## Chapter 3

# The system initialization

It is wise for you as the system administrator to know roughly how the Debian system is started and configured. Although the exact details are in the source files of the packages installed and their documentations, it is a bit overwhelming for most of us.

Here is a rough overview of the key points of the Debian system initialization. Since the Debian system is a moving target, you should refer to the latest documentation.

- [Debian Linux Kernel Handbook](#) is the primary source of information on the Debian kernel.
- `bootup(7)` describes the system bootup process based on `systemd`. (Recent Debian)
- `boot(7)` describes the system bootup process based on UNIX System V Release 4. (Older Debian)

### 3.1 An overview of the boot strap process

The computer system undergoes several phases of [boot strap processes](#) from the power-on event until it offers the fully functional operating system (OS) to the user.

For simplicity, I limit discussion to the typical PC platform with the default installation.

The typical boot strap process is like a four-stage rocket. Each stage rocket hands over the system control to the next stage one.

- Section [3.1.1](#)
- Section [3.1.2](#)
- Section [3.1.3](#)
- Section [3.1.4](#)

Of course, these can be configured differently. For example, if you compiled your own kernel, you may be skipping the step with the mini-Debian system. So please do not assume this is the case for your system until you check it yourself.

#### 3.1.1 Stage 1: the UEFI

The [Unified Extensible Firmware Interface \(UEFI\)](#) defines a boot manager as part of the UEFI specification. When a computer is powered on, the boot manager is the 1st stage of the boot process which checks the boot configuration and based on its settings, then executes the specified OS boot loader or operating system kernel (usually boot loader).

---

The boot configuration is defined by variables stored in NVRAM, including variables that indicate the file system paths to OS loaders or OS kernels.

An [EFI system partition \(ESP\)](#) is a data storage device partition that is used in computers adhering to the UEFI specification. Accessed by the UEFI firmware when a computer is powered up, it stores UEFI applications and the files these applications need to run, including operating system boot loaders. (On the legacy PC system, [BIOS](#) stored in the [MBR](#) may be used instead.)

### 3.1.2 Stage 2: the boot loader

The [boot loader](#) is the 2nd stage of the boot process which is started by the UEFI. It loads the system kernel image and the [initrd](#) image to the memory and hands control over to them. This [initrd](#) image is the root filesystem image and its support depends on the bootloader used.

The Debian system normally uses the Linux kernel as the default system kernel. The [initrd](#) image for the current 5.x Linux kernel is technically the [initramfs](#) (initial RAM filesystem) image.

There are many boot loaders and configuration options available.

| package                         | popcon                         | size                 | initrd        | bootloader                         | description  |
|---------------------------------|--------------------------------|----------------------|---------------|------------------------------------|--|
| <a href="#">grub-efi-amd64</a>  | <a href="#">I:451</a>          | <a href="#">142</a>  | Supported     | <a href="#">GRUB UEFI</a>          | This is smart enough to understand disk partitions and filesystems such as vfat, ext4, .... (UEFI)         |
| <a href="#">grub-pc</a>         | <a href="#">V:17, I:525</a>    | <a href="#">479</a>  | Supported     | <a href="#">GRUB 2</a>             | This is smart enough to understand disk partitions and filesystems such as vfat, ext4, .... (BIOS)         |
| <a href="#">grub-rescue-pc</a>  | <a href="#">V:0.07, I:0.59</a> | <a href="#">7273</a> | Supported     | <a href="#">GRUB 2</a>             | This is GRUB 2 bootable rescue images (CD and floppy) (PC/BIOS version)                                    |
| <a href="#">grml-rescueboot</a> | <a href="#">V:0.1, I:1.1</a>   | <a href="#">36</a>   | N/A           | <a href="#">GRUB 2 plug-in</a>     | <a href="#">grml-rescueboot</a> adds live Linux ISO images to the grub2 boot menu                          |
| <a href="#">syslinux</a>        | <a href="#">V:3, I:32</a>      | <a href="#">325</a>  | Supported     | <a href="#">Isolinux</a>           | This understands the ISO9660 filesystem. This is used by the boot CD.                                      |
| <a href="#">syslinux</a>        | <a href="#">V:3, I:32</a>      | <a href="#">325</a>  | Supported     | <a href="#">Syslinux</a>           | This understands the <a href="#">MSDOS filesystem (FAT)</a> . This is used by the boot floppy.             |
| <a href="#">loadlin</a>         | <a href="#">V:0.03, I:0.40</a> | <a href="#">87</a>   | Supported     | <a href="#">Loadlin</a>            | New system is started from the FreeDOS/MSDOS system.   |
| <a href="#">mbr</a>             | <a href="#">V:0.3, I:2.9</a>   | <a href="#">47</a>   | Not supported | <a href="#">MBR by Neil Turton</a> | This is free software which substitutes MSDOS <a href="#">MBR</a> . This only understands disk partitions. |

Table 3.1: List of boot loaders

For UEFI system, GRUB2 first reads the ESP partition and uses UUID specified for search. `fs_uuid` in `"/boot/efi/EFI/"` to determine the partition of the GRUB2 menu configuration file `"/boot/grub/grub.cfg"`.

The key part of the GRUB2 menu configuration file looks like:

```
menuentry 'Debian GNU/Linux' ... {
    load_video
    insmod gzio
    insmod part_gpt
    insmod ext2
    search --no-floppy --fs-uuid --set=root fe3e1db5-6454-46d6-a14c-071208ebe4b1
    echo 'Loading Linux 5.10.0-6-amd64 ...'
```

```
linux    /boot/vmlinuz-5.10.0-6-amd64 root=UUID=fe3e1db5-6454-46d6-a14c-071208ebe4b1 ↵
        ro quiet
echo     'Loading initial ramdisk ...'
initrd   /boot/initrd.img-5.10.0-6-amd64
}
```

For this part of `/boot/grub/grub.cfg`, this menu entry means the following.

| setting                                   | value  |
|---|--|
| GRUB2 modules loaded                      | gzio, part_gpt, ext2   |
| root file system partition used           | partition identified by<br>UUID=fe3e1db5-6454-46d6-a14c-071208ebe4b1 |
| kernel image path in the root file system | /boot/vmlinuz-5.10.0-6-amd64   |
| kernel boot parameter used                | "root=UUID=fe3e1db5-6454-46d6-a14c-071208ebe4b1<br>ro quiet"         |
| initrd image path in the root file system | /boot/initrd.img-5.10.0-6-amd64                                      |

Table 3.2: The meaning of the menu entry of the above part of `/boot/grub/grub.cfg`

On Debian system, `"/boot/grub/grub.cfg"` is managed by the installed GRUB package (e.g. `grub-efi-amd64`) and direct user modification to this file is deprecated. You should customize configuration files in `"/etc/grub.d/"` and `"/etc/default/grub"`, instead. Then configure the GRUB configuration files and update NVRAM variables to automatically boot into Debian by:

```
# dpkg-reconfigure grub-efi-amd64
```

---

**Tip**  
You can show kernel boot log messages by removing "quiet" from the "GRUB\_CMDLINE\_LINUX\_DEFAULT" value in `"/etc/default/grub"`.

---

---

**Tip**  
You can add GRUB splash background by placing its image file in `"/boot/grub/"`.

---

See `"info grub"`, `grub-install(8)`, `grub-mkconfig(8)`.

### 3.1.3 Stage 3: the mini-Debian system

The mini-Debian system is the 3rd stage of the boot process which is started by the boot loader. It runs the system kernel with its root filesystem on the memory. This is an optional preparatory stage of the boot process.

---

**Note**  
The term "the mini-Debian system" is coined by the author to describe this 3rd stage boot process for this document. This system is commonly referred as the [initrd](#) or `initramfs` system. Similar system on the memory is used by [the Debian Installer](#).

---

The `"/init"` program is executed as the first program in this root filesystem on the memory. It is a program which initializes the kernel in user space and hands control over to the next stage. This mini-Debian system offers flexibility to the boot process such as adding kernel modules before the main boot process or mounting the root filesystem as an encrypted one.

---

- The `/init` program is a shell script program if `initramfs` was created by `initramfs-tools`.
  - You can interrupt this part of the boot process to gain root shell by providing `break=init` etc. to the kernel boot parameter. See the `/init` script for more break conditions. This shell environment is sophisticated enough to make a good inspection of your machine's hardware.
  - Commands available in this mini-Debian system are stripped down ones and mainly provided by a GNU tool called `busybox(1)`.
- The `/init` program is a binary `systemd` program if `initramfs` was created by `dracut`.
  - Commands available in this mini-Debian system are stripped down `systemd(1)` environment.

**Caution**

You need to use `-n` option for `mount` command when you are on the readonly root filesystem.

---

### 3.1.4 Stage 4: the normal Debian system

The normal Debian system is the 4th stage of the boot process which is started by the mini-Debian system. The system kernel for the mini-Debian system continues to run in this environment. The root filesystem is switched from the one on the memory to the one on the physical storage device.

The `init` program is executed as the first program with `PID=1` to perform the main boot process of starting many programs. The default file path for the `init` program is `/usr/sbin/init` but it can be changed by the kernel boot parameter as `init=/path/to/init_program`.

`/usr/sbin/init` is symlinked to `/lib/systemd/systemd` after Debian 8 Jessie (released in 2015).

---

**Tip**

The actual `init` command on your system can be verified by the `ps --pid 1 -f` command.

---

---

**Tip**

See [Debian wiki: BootProcessSpeedup](#) for the latest tips to speed up the boot process.

---

## 3.2 Rescue system

**Warning**

Do not perform system administration tasks around the boot strap process without having a rescue system.

---

Availability of a rescue system enables us to perform challenging tasks such as:

- Booting a system from a broken boot loader installation
  - Fixing a broken boot loader installation
  - Extracting data from a broken unbootable system
-

| package                             | popcon         | size  | description   |
|-------------------------------------|----------------|-------|---|
| <a href="#">systemd</a>             | V:919, I:979   | 11764 | event-based <code>init(8)</code> daemon for concurrency (alternative to <code>sysvinit</code> ) |
| <a href="#">cloud-init</a>          | V:4.4, I:6.7   | 3240  | initialization system for infrastructure cloud instances  |
| <a href="#">systemd-sysv</a>        | V:909, I:980   | 68    | the manual pages and links needed for <code>systemd</code> to replace <code>sysvinit</code>     |
| <a href="#">init-system-helpers</a> | V:595, I:987   | 133   | helper tools for switching between <code>sysvinit</code> and <code>systemd</code>               |
| <a href="#">initscripts</a>         | V:17, I:62     | 197   | scripts for initializing and shutting down the system   |
| <a href="#">sysvinit-core</a>       | V:3.4, I:3.9   | 365   | System-V-like <code>init(8)</code> utilities  |
| <a href="#">sysv-rc</a>             | V:33, I:66     | 85    | System-V-like runlevel change mechanism   |
| <a href="#">sysvinit-utils</a>      | V:726, I:1000  | 100   | System-V-like utilities ( <code>startpar(8)</code> , <code>bootlogd(8)</code> , ...)            |
| <a href="#">lsb-base</a>            | V:227, I:332   | 12    | <a href="#">Linux Standard Base</a> 3.2 init script functionality                               |
| <a href="#">insserv</a>             | V:40, I:65     | 132   | tool to organize boot sequence using LSB <code>init.d</code> script dependencies                |
| <a href="#">kexec-tools</a>         | V:1.4, I:5.3   | 320   | <code>kexec</code> tool for <code>kexec(8)</code> reboots (warm reboot)                         |
| <a href="#">systemd-bootchart</a>   | V:0.17, I:0.55 | 131   | boot process performance analyser   |
| <a href="#">mingetty</a>            | V:0.1, I:2.6   | 36    | console-only <code>getty(8)</code>  |
| <a href="#">mgetty</a>              | V:0.13, I:0.48 | 318   | smart modem <code>getty(8)</code> replacement   |

Table 3.3: List of boot utilities for the Debian system

- Editing filesystems, disk partitions, and LVM volumes involving the root filesystem

Typically, a rescue system is provided as a ISO image file and written to a removable storage media such as:

- [USB flash drive](#) prepared as [Section 9.7.2](#)
- [CD / DVD](#) prepared as [Section 9.7.7](#)

For simplicity, USB flash drive cases are mentioned as examples below but CD or DVD may be used as well.

---

#### Tip

You may need to change some UEFI NVRAM variables to boot arbitrary boot loaders on the removable storage media.

---

### 3.2.1 GRUB UEFI rescue system on USB

The GRUB UEFI rescue system with menu can be started by turning on system power with the "GRUB UEFI rescue system on USB" inserted.

This "GRUB UEFI rescue system on USB" is prepared by writing the [Super Grub2 Disk](#) ISO image to [USB flash drive](#) in advance.

In case of broken boot loader configuration by the installation of another operating system etc., you can fix this by:

- Start the GRUB UEFI rescue system to discover bootable installed systems automatically.
  - Start the installed Debian system from the GRUB menu.
  - At Linux root shell prompt:
-

```
# dpkg-reconfigure grub-efi-amd64
```

---

**Note**

The bootable GRUB rescue ISO image can be generated by following "info grub-mkrescue", too. It offers a CLI GRUB shell prompt but doesn't offer automatic discovery of bootable installed systems.

---

### 3.2.2 Linux live rescue system on USB

The Linux live rescue system can be started by turning on system power with the "Linux live rescue system on USB" inserted.

This "Linux live rescue system on USB" can be prepared by writing one of Linux live ISO images based on Debian to a [USB flash drive](#) in advance. Here are some examples of such Linux live images.

- [Debian Live images](#)
- [Kali Linux Live](#)
- [Grml Live Linux](#)

Here are some use cases of this Linux live rescue system:

- Fix the broken boot loader configuration caused by the installation of another operating system etc.:

- Start the Linux live rescue system.
- Mount the partition containing the root filesystem of the unbootable installed Debian system to `/mnt`.
- At Linux root shell prompt:

```
# chroot /mnt; dpkg-reconfigure grub-efi-amd64
```

- Fix the broken dpkg package:

- Start the Linux live rescue system.
- Mount the partition containing the root filesystem of the installed Debian system with the broken dpkg package to `/mnt`.
- At Linux root shell prompt:

```
# dpkg --root /mnt -i /mnt/var/cache/apt/archives/dpkg_old_version_amd64.deb
```

- Perform normally prohibited changes such as filesystem operations to the installed system (see [Section 9.6](#)).

**Warning**

Your GUI screen of the Linux live system may be locked after the inactivity.

---

**Tip**

- It's a good idea to set [your password as soon as you start a Linux live system](#).
  - You may set your password for example by `"sudo passwd user"` from the user's shell prompt on the Linux virtual consoles (see [Section 1.1.6](#)).
  - Some Linux live systems may set their default `"user/password"`: "Debian Live" = "user/live", "Kali Linux Live" = "kali/kali"
-

### 3.2.3 Linux live rescue system from GRUB

The Linux live rescue system can be started from the GRUB menu entry. The GRUB configuration for this is prepared by the following:

- Install the `grml-rescueboot` package
- Find a Linux live ISO image which has `/boot/grub/loopback.cfg` in its image.
  - ISO images mentioned in Section 3.2.2 have `/boot/grub/loopback.cfg` in their image.
- Copy some of these Linux live ISO images to the `/boot/grml/` directory.
- Update GRUB menu by:

```
# dpkg-reconfigure grub-efi-amd64
```

Upon turning on system power, the GRUB displays menu with candidates for Linux live rescue systems.

## 3.3 Systemd

### 3.3.1 Systemd init

When the Debian system starts, `/usr/sbin/init` symlinked to `/usr/lib/systemd` is started as the init system process (PID=1) owned by root (UID=0). See `systemd(1)`.

The `systemd` init process spawns processes in parallel based on the unit configuration files (see `systemd.unit(5)`) which are written in declarative style instead of SysV-like procedural style.

The spawned processes are placed in individual [Linux control groups](#) named after the unit which they belong to in the private `systemd` hierarchy (see [cgroups](#) and Section 4.7.5).

Units for the system mode are loaded from the "System Unit Search Path" described in `systemd.unit(5)`. The main ones are as follows in the order of priority:

- `/etc/systemd/system/*`: System units created by the administrator
- `/run/systemd/system/*`: Runtime units
- `/lib/systemd/system/*`: System units installed by the distribution package manager

Their inter-dependencies are specified by the directives `"Wants="`, `"Requires="`, `"Before="`, `"After="`, ... (see "MAPPING OF UNIT PROPERTIES TO THEIR INVERSES" in `systemd.unit(5)`). The resource controls are also defined (see `systemd.resource-control(5)`).

The suffix of the unit configuration file encodes their types as:

- **\*.service** describes the process controlled and supervised by `systemd`. See `systemd.service(5)`.
- **\*.device** describes the device exposed in the `sysfs(5)` as `udev(7)` device tree. See `systemd.device(5)`.
- **\*.mount** describes the file system mount point controlled and supervised by `systemd`. See `systemd.mount(5)`.
- **\*.automount** describes the file system auto mount point controlled and supervised by `systemd`. See `systemd.automount(5)`.
- **\*.swap** describes the swap device or file controlled and supervised by `systemd`. See `systemd.swap(5)`.
- **\*.path** describes the path monitored by `systemd` for path-based activation. See `systemd.path(5)`.
- **\*.socket** describes the socket controlled and supervised by `systemd` for socket-based activation. See `systemd.socket(5)`.



- **\*.timer** describes the timer controlled and supervised by `systemd` for timer-based activation. See `systemd.timer(5)`.
- **\*.slice** manages resources with the `cgroups(7)`. See `systemd.slice(5)`.
- **\*.scope** is created programmatically using the bus interfaces of `systemd` to manages a set of system processes. See `systemd.scope(5)`.
- **\*.target** groups other unit configuration files to create the synchronization point during start-up. See `systemd.target(5)`.

Upon system start up (i.e., `init`), the `systemd` process tries to start the `/lib/systemd/system/default.target` (normally symlinked to `graphical.target`). First, some special target units (see `systemd.special(7)`) such as `local-fs.target`, `swap.target` and `cryptsetup.target` are pulled in to mount the filesystems. Then, other target units are also pulled in by the target unit dependencies. For details, read `bootup(7)`.

`systemd` offers backward compatibility features. SysV-style boot scripts in `/etc/init.d/rc[0123456S].d/[KS]name` are still parsed and `telinit(8)` is translated into `systemd` unit activation requests.

**Caution**

Emulated runlevel 2 to 4 are all symlinked to the same `multi-user.target`.

---

### 3.3.2 Systemd login

When a user logs in to the Debian system via `gdm3(8)`, `sshd(8)`, etc., `/lib/systemd/system --user` is started as the user service manager process owned by the corresponding user. See `systemd(1)`.

The `systemd` user service manager process spawns processes in parallel based on the declarative unit configuration files (see `systemd.unit(5)` and `user@.service(5)`).

Units for the user mode are loaded from the "User Unit Search Path" described in `systemd.unit(5)`. The main ones are as follows in the order of priority:

- `~/.config/systemd/user/*`: User configuration units
- `/etc/systemd/user/*`: User units created by the administrator
- `/run/systemd/user/*`: Runtime units
- `/lib/systemd/user/*`: User units installed by the distribution package manager

These are managed in the same way as Section [3.3.1](#).

## 3.4 The kernel message

The kernel error message displayed to the console can be configured by setting its threshold level.

```
# dmesg -n3
```

---

| error level value | error level name | meaning                          |
|-------------------|------------------|----------------------------------|
| 0                 | KERN_EMERG       | system is unusable               |
| 1                 | KERN_ALERT       | action must be taken immediately |
| 2                 | KERN_CRIT        | critical conditions              |
| 3                 | KERN_ERR         | error conditions                 |
| 4                 | KERN_WARNING     | warning conditions               |
| 5                 | KERN_NOTICE      | normal but significant condition |
| 6                 | KERN_INFO        | informational                    |
| 7                 | KERN_DEBUG       | debug-level messages             |

Table 3.4: List of kernel error levels

| Operation   | Command snippets             |
|---|------------------------------|
| View log for system services and kernel from the last boot    | "journalctl -b --system"     |
| View log for services of the current user from the last boot  | "journalctl -b --user"       |
| View job log of "\$unit" from the last boot                   | "journalctl -b -u \$unit"    |
| View job log of "\$unit" ("tail -f" style) from the last boot | "journalctl -b -u \$unit -f" |

Table 3.5: List of typical journalctl command snippets

## 3.5 The system message

Under systemd, both kernel and system messages are logged by the journal service `systemd-journald.service` (a.k.a `journald`) either into a persistent binary data below `/var/log/journal` or into a volatile binary data below `/run/log/journal/`. These binary log data are accessed by the `journalctl(1)` command. For example, you can display log from the last boot as:

```
$ journalctl -b
```

Under systemd, the system logging utility `rsyslogd(8)` may be uninstalled. If it is installed, it changes its behavior to read the volatile binary log data (instead of pre-systemd default `/dev/log`) and to create traditional permanent ASCII system log data. This can be customized by `/etc/default/rsyslog` and `/etc/rsyslog.conf` for both the log file and on-screen display. See `rsyslogd(8)` and `rsyslog.conf(5)`. See also Section 9.3.2.

## 3.6 System management

The `systemd` offers not only init system but also generic system management operations with the `systemctl(1)` command.

Here, "\$unit" in the above examples may be a single unit name (suffix such as `.service` and `.target` are optional) or, in many cases, multiple unit specifications (shell-style globs `"*"`, `"?"`, `"["` using `fnmatch(3)` which will be matched against the primary names of all units currently in memory).

System state changing commands in the above examples are typically preceded by the `"sudo"` to attain the required administrative privilege.

The output of the `"systemctl status $unit | $PID | $device"` uses color of the dot ("●") to summarize the unit state at a glance.

- White "●" indicates an "inactive" or "deactivating" state.
- Red "●" indicates a "failed" or "error" state.

| Operation                                       | Command snippets                           |
|---|--|
| List all available unit types                   | "systemctl list-units --type=help"         |
| List all target units in memory                 | "systemctl list-units --type=target"       |
| List all service units in memory                | "systemctl list-units --type=service"      |
| List all device units in memory                 | "systemctl list-units --type=device"       |
| List all mount units in memory                  | "systemctl list-units --type=mount"        |
| List all socket units in memory                 | "systemctl list-sockets"                   |
| List all timer units in memory                  | "systemctl list-timers"                    |
| Start "\$unit"                                  | "systemctl start \$unit"                   |
| Stop "\$unit"                                   | "systemctl stop \$unit"                    |
| Reload service-specific configuration           | "systemctl reload \$unit"                  |
| Stop and start all "\$unit"                     | "systemctl restart \$unit"                 |
| Start "\$unit" and stop all others              | "systemctl isolate \$unit"                 |
| Switch to "graphical" (GUI system)              | "systemctl isolate graphical"              |
| Switch to "multi-user" (CLI system)             | "systemctl isolate multi-user"             |
| Switch to "rescue" (single user CLI system)     | "systemctl isolate rescue"                 |
| Send kill signal to "\$unit"                    | "systemctl kill \$unit"                    |
| Check if "\$unit" service is active             | "systemctl is-active \$unit"               |
| Check if "\$unit" service is failed             | "systemctl is-failed \$unit"               |
| Check status of "\$unit \$PID device"           | "systemctl status \$unit \$PID \$device"   |
| Show properties of "\$unit \$job"               | "systemctl show \$unit \$job"              |
| Reset failed "\$unit"                           | "systemctl reset-failed \$unit"            |
| List dependency of all unit services            | "systemctl list-dependencies --all"        |
| List unit files installed on the system         | "systemctl list-unit-files"                |
| Enable "\$unit" (add symlink)                   | "systemctl enable \$unit"                  |
| Disable "\$unit" (remove symlink)               | "systemctl disable \$unit"                 |
| Unmask "\$unit" (remove symlink to "/dev/null") | "systemctl unmask \$unit"                  |
| Mask "\$unit" (add symlink to "/dev/null")      | "systemctl mask \$unit"                    |
| Get default-target setting                      | "systemctl get-default"                    |
| Set default-target to "graphical" (GUI system)  | "systemctl set-default graphical"          |
| Set default-target to "multi-user" (CLI system) | "systemctl set-default multi-user"         |
| Show job environment                            | "systemctl show-environment"               |
| Set job environment "variable" to "value"       | "systemctl set-environment variable=value" |
| Unset job environment "variable"                | "systemctl unset-environment variable"     |
| Reload all unit files and daemons               | "systemctl daemon-reload"                  |
| Shut down the system                            | "systemctl poweroff"                       |
| Shut down and reboot the system                 | "systemctl reboot"                         |
| Suspend the system                              | "systemctl suspend"                        |
| Hibernate the system                            | "systemctl hibernate"                      |

Table 3.6: List of typical systemctl command snippets

- Green "●" indicates an "active", "reloading" or "activating" state.

## 3.7 Other system monitors

Here are a list of other monitoring command snippets under `systemd`. Please read the pertinent manpages including `cgroups(7)`.

| Operation   | Command snippets  |
|---|---|
| Show time spent for each initialization steps                             | "systemd-analyze time"  |
| List of all units by the time to initialize                               | "systemd-analyze blame"                                       |
| Load and detect errors in "\$unit" file                                   | "systemd-analyze verify \$unit"                               |
| Show terse runtime status information of the user of the caller's session | "loginctl user-status"  |
| Show terse runtime status information of the caller's session             | "loginctl session-status"                                     |
| Track boot process by the <a href="#">cgroups</a>                         | "systemd-cgls"  |
| Track boot process by the <a href="#">cgroups</a>                         | "ps xawf -eo pid,user,cgroup,args"                            |
| Track boot process by the <a href="#">cgroups</a>                         | Read <a href="#">sysfs</a> under <code>/sys/fs/cgroup/</code> |

Table 3.7: List of other monitoring command snippets under `systemd`

## 3.8 System configuration

### 3.8.1 The hostname

The kernel maintains the system **hostname**. The system unit started by `systemd-hostnamed.service` sets the system hostname at boot time to the name stored in `/etc/hostname`. This file should contain **only** the system hostname, not a fully qualified domain name.

To print out the current hostname run `hostname(1)` without an argument.

### 3.8.2 The filesystem

The mount options of normal disk and network filesystems are set in `/etc/fstab`. See `fstab(5)` and Section [9.6.7](#).

The configuration of the encrypted filesystem is set in `/etc/crypttab`. See `crypttab(5)`

The configuration of software RAID with `mdadm(8)` is set in `/etc/mdadm/mdadm.conf`. See `mdadm.conf(5)`.



#### Warning

After mounting all the filesystems, temporary files in `/tmp`, `/var/lock`, and `/var/run` are cleaned for each boot up.

### 3.8.3 Network interface initialization

Network interfaces are typically initialized in `networking.service` for the `lo` interface and `NetworkManager.service` for other interfaces on modern Debian desktop system under `systemd`.

See Chapter [5](#) for how to configure them.

### 3.8.4 Cloud system initialization

The cloud system instance may be launched as a clone of "[Debian Official Cloud Images](#)" or similar images. For such system instance, personalities such as hostname, filesystem, networking, locale, SSH keys, users and groups may be configured using functionalities provided by `cloud-init` and `netplan.io` packages with multiple data sources such as files placed in the original system image and external data provided during its launch. These packages enable the declarative system configuration using [YAML](#) data.

See more at "[Cloud Computing with Debian and its descendants](#)", "[Cloud-init documentation](#)" and [Section 5.4](#).

### 3.8.5 Customization example to tweak sshd service

With default installation, many network services (see [Chapter 6](#)) are started as daemon processes after `network.target` at boot time by `systemd`. The "sshd" is no exception. Let's change this to on-demand start of "sshd" as a customization example.

First, disable system installed service unit.

```
$ sudo systemctl stop sshd.service
$ sudo systemctl mask sshd.service
```

The on-demand socket activation system of the classic Unix services was through the `inetd` (or `xinetd`) superserver. Under `systemd`, the equivalent can be enabled by adding **\*.socket** and **\*.service** unit configuration files.

`sshd.socket` for specifying a socket to listen on

```
[Unit]
Description=SSH Socket for Per-Connection Servers

[Socket]
ListenStream=22
Accept=yes

[Install]
WantedBy=sockets.target
```

`sshd@.service` as the matching service file of `sshd.socket`

```
[Unit]
Description=SSH Per-Connection Server

[Service]
ExecStart=-/usr/sbin/sshd -i
StandardInput=socket
```

Then reload.

```
$ sudo systemctl daemon-reload
```

## 3.9 The udev system

The [udev system](#) provides mechanism for the automatic hardware discovery and initialization (see `udev(7)`) since Linux kernel 2.6. Upon discovery of each device by the kernel, the udev system starts a user process which uses information from the [sysfs](#) filesystem (see [Section 1.2.12](#)), loads required kernel modules supporting it using the `modprobe(8)` program (see [Section 3.10](#)), and creates corresponding device nodes.

---

**Tip**

If `/lib/modules/kernel-version/modules.dep` was not generated properly by `depmod(8)` for some reason, modules may not be loaded as expected by the `udev` system. Execute `depmod -a` to fix it. For mounting rules in `/etc/fstab`, device nodes do not need to be static ones. You can use [UUID](#) to mount devices instead of device names such as `/dev/sda`. See [Section 9.6.3](#).

---

Since the `udev` system is somewhat a moving target, I leave details to other documentations and describe the minimum information here.

**Warning**

Don't try to run long running programs such as backup script with `RUN` in `udev` rules as mentioned in `udev(7)`. Please create a proper `systemd.service(5)` file and activate it, instead. See [Section 10.2.3.2](#).

---

## 3.10 The kernel module initialization

The `modprobe(8)` program enables us to configure running Linux kernel from user process by adding and removing kernel modules. The `udev` system (see [Section 3.9](#)) automates its invocation to help the kernel module initialization.

There are non-hardware modules and special hardware driver modules as the following which need to be pre-loaded by listing them in the `/etc/modules` file (see `modules(5)`).

- [TUN/TAP](#) modules providing virtual Point-to-Point network device (TUN) and virtual Ethernet network device (TAP),
- [netfilter](#) modules providing netfilter firewall capabilities (`iptables(8)`, [Section 5.7](#)), and
- [watchdog timer](#) driver modules.

The configuration files for the `modprobe(8)` program are located under the `/etc/modprobes.d/` directory as explained in `modprobe.conf(5)`. (If you want to avoid some kernel modules to be auto-loaded, consider to blacklist them in the `/etc/modprobes.d/blacklist` file.)

The `/lib/modules/version/modules.dep` file generated by the `depmod(8)` program describes module dependencies used by the `modprobe(8)` program.

---

**Note**

If you experience module loading issues with boot time module loading or with `modprobe(8)`, `depmod -a` may resolve these issues by reconstructing `modules.dep`.

---

The `modinfo(8)` program shows information about a Linux kernel module.

The `lsmod(8)` program nicely formats the contents of the `/proc/modules`, showing what kernel modules are currently loaded.

---

**Tip**

You can identify exact hardware on your system. See [Section 9.5.3](#).

You may configure hardware at boot time to activate expected hardware features. See [Section 9.5.4](#).

You can probably add support for your special device by recompiling the kernel. See [Section 9.10](#).

---

## Chapter 4

# Authentication and access controls

When a person (or a program) requests access to the system, authentication confirms the identity to be a trusted one.



### Warning

Configuration errors of PAM may lock you out of your own system. You must have a rescue CD handy or setup an alternative boot partition. To recover, boot the system with them and correct things from there.

## 4.1 Normal Unix authentication

Normal Unix authentication is provided by the `pam_unix(8)` module under the [PAM \(Pluggable Authentication Modules\)](#). Its 3 important configuration files, with ":" separated entries, are the following.

| file        | permission | user | group  | description                          |
|-------------|------------|------|--------|--------------------------------------|
| /etc/passwd | -rw-r--r-- | root | root   | (sanitized) user account information |
| /etc/shadow | -rw-r----- | root | shadow | secure user account information      |
| /etc/group  | -rw-r--r-- | root | root   | group information                    |

Table 4.1: 3 important configuration files for `pam_unix(8)`

"/etc/passwd" contains the following.

```
...
user1:x:1000:1000:User1 Name,,,:/home/user1:/bin/bash
user2:x:1001:1001:User2 Name,,,:/home/user2:/bin/bash
...
```

As explained in `passwd(5)`, each ":" separated entry of this file means the following.

- Login name
- Password specification entry
- Numerical user ID
- Numerical group ID
- User name or comment field

- User home directory
- Optional user command interpreter

The second entry of `/etc/passwd` was used for the encrypted password entry. After the introduction of `/etc/shadow`, this entry is used for the password specification entry.

| content | meaning   |
|---------|---|
| (empty) | passwordless account                                  |
| x       | the encrypted password is in <code>/etc/shadow</code> |

Table 4.2: The second entry content of `/etc/passwd`

`/etc/shadow` contains the following.

```
...
user1:$1$Xop0FYH9$IfxyQwBe9b8tiyIkt2P4F/:13262:0:99999:7:::
user2:$1$vXGZLVbS$ElyErNf/agUDsm1DehJMS/:13261:0:99999:7:::
...
```

As explained in `shadow(5)`, each `:` separated entry of this file means the following.

- Login name
- Encrypted password (The initial `$1$` indicates use of the MD5 encryption. The `*` indicates no login.)
- Date of the last password change, expressed as the number of days since Jan 1, 1970
- Number of days the user will have to wait before she will be allowed to change her password again
- Number of days after which the user will have to change her password
- Number of days before a password is going to expire during which the user should be warned
- Number of days after a password has expired during which the password should still be accepted
- Date of expiration of the account, expressed as the number of days since Jan 1, 1970
- ...

`/etc/group` contains the following.

```
group1:x:20:user1,user2
```

As explained in `group(5)`, each `:` separated entry of this file means the following.

- Group name
- Encrypted password (not really used)
- Numerical group ID
- `,` separated list of user names

---

#### Note

`/etc/gshadow` provides the similar function as `/etc/shadow` for `/etc/group` but is not really used.

---



**Note**

The actual group membership of a user may be dynamically added if "auth optional pam\_group.so" line is added to "/etc/pam.d/common-auth" and set it in "/etc/security/group.conf". See `pam_group(8)`.

**Note**

The `base-passwd` package contains an authoritative list of the user and the group: "/usr/share/doc/base-passwd/users-and-groups.html".

## 4.2 Managing account and password information

Here are few notable commands to manage account information.

| command                              | function  |
|--------------------------------------|---|
| <code>getent passwd user_name</code> | browse account information of " <i>user_name</i> "          |
| <code>getent shadow user_name</code> | browse shadowed account information of " <i>user_name</i> " |
| <code>getent group group_name</code> | browse group information of " <i>group_name</i> "           |
| <code>passwd</code>                  | manage password for the account                             |
| <code>passwd -e</code>               | set one-time password for the account activation            |
| <code>chage</code>                   | manage password aging information                           |

Table 4.3: List of commands to manage account information

You may need to have the root privilege for some functions to work. See `crypt(3)` for the password and data encryption.

**Note**

On the system set up with PAM and NSS as the Debian [salsa](#) machine, the content of local "/etc/passwd", "/etc/group" and "/etc/shadow" may not be actively used by the system. Above commands are valid even under such environment.

## 4.3 Good password

When creating an account during your system installation or with the `passwd(1)` command, you should choose a [good password](#) which consists of at least 6 to 8 characters including one or more characters from each of the following sets according to `passwd(1)`.

- Lower case alphabetics
- Digits 0 through 9
- Punctuation marks

**Warning**

Do not choose guessable words for the password. Account name, social security number, phone number, address, birthday, name of your family members or pets, dictionary words, simple sequence of characters such as "12345" or "qwerty", ... are all bad choice for the password.

## 4.4 Creating encrypted password

There are independent tools to [generate encrypted passwords with salt](#).

| package                 | popcon                       | size                 | command                           | function   |
|-------------------------|------------------------------|----------------------|-----------------------------------|--|
| <a href="#">whois</a>   | <a href="#">V:23, I:208</a>  | <a href="#">384</a>  | mkpasswd                          | over-featured front end to the crypt(3) library    |
| <a href="#">openssl</a> | <a href="#">V:847, I:996</a> | <a href="#">2532</a> | <a href="#">openssl</a><br>passwd | compute password hashes (OpenSSL).<br>passwd(1ssl) |

Table 4.4: List of tools to generate password

## 4.5 PAM and NSS

Modern [Unix-like](#) systems such as the Debian system provide [PAM \(Pluggable Authentication Modules\)](#) and [NSS \(Name Service Switch\)](#) mechanism to the local system administrator to configure his system. The role of these can be summarized as the following.

- PAM offers a flexible authentication mechanism used by the application software thus involves password data exchange.
- NSS offers a flexible name service mechanism which is frequently used by the [C standard library](#) to obtain the user and group name for programs such as `ls(1)` and `id(1)`.

These PAM and NSS systems need to be configured consistently.

The notable packages of PAM and NSS systems are the following.

| package                             | popcon                        | size                  | description   |
|-------------------------------------|-------------------------------|-----------------------|---|
| <a href="#">libpam-modules</a>      | <a href="#">V:941, I:1000</a> | <a href="#">891</a>   | Pluggable Authentication Modules (basic service)                                  |
| <a href="#">libpam-ldapd</a>        | <a href="#">V:7, I:14</a>     | <a href="#">79</a>    | Pluggable Authentication Module allowing LDAP interfaces                          |
| <a href="#">libpam-systemd</a>      | <a href="#">V:738, I:966</a>  | <a href="#">777</a>   | Pluggable Authentication Module to register user sessions for <code>logind</code> |
| <a href="#">libpam-doc</a>          | <a href="#">I:7.1</a>         | <a href="#">1491</a>  | Pluggable Authentication Modules (documentation in html and text)                 |
| <a href="#">libc6</a>               | <a href="#">V:940, I:1000</a> | <a href="#">5355</a>  | GNU C Library: Shared libraries which also provides "Name Service Switch" service |
| <a href="#">glibc-doc</a>           | <a href="#">I:5.5</a>         | <a href="#">3836</a>  | GNU C Library: Manpages   |
| <a href="#">glibc-doc-reference</a> | <a href="#">I:3.3</a>         | <a href="#">14261</a> | GNU C Library: Reference manual in info, pdf and html format (non-free)           |
| <a href="#">libnss-mdns</a>         | <a href="#">V:271, I:506</a>  | <a href="#">142</a>   | NSS module for Multicast DNS name resolution                                      |
| <a href="#">libnss-ldapd</a>        | <a href="#">V:8, I:17</a>     | <a href="#">131</a>   | NSS module for using LDAP as a naming service                                     |

Table 4.5: List of notable PAM and NSS systems

- "The Linux-PAM System Administrators' Guide" in `libpam-doc` is essential for learning PAM configuration.
- "System Databases and Name Service Switch" section in `glibc-doc-reference` is essential for learning NSS configuration.

**Note**

You can see more extensive and current list by "aptitude search 'libpam-|libnss-'" command. The acronym NSS may also mean "Network Security Service" which is different from "Name Service Switch".

**Note**

PAM is the most basic way to initialize environment variables for each program with the system wide default value.

Under [systemd](#), libpam-systemd package is installed to manage user logins by registering user sessions in the systemd control group hierarchy for [logind](#). See systemd-logind(8), logind.conf(5), and pam\_systemd(8).

### 4.5.1 Configuration files accessed by PAM and NSS

Here are a few notable configuration files accessed by PAM and NSS.

| configuration file              | function   |
|---------------------------------|--|
| /etc/pam.d/ <i>program_name</i> | set up PAM configuration for the " <i>program_name</i> " program; see pam(7) and pam.d(5)          |
| /etc/nsswitch.conf              | set up NSS configuration with the entry for each service. See nsswitch.conf(5)                     |
| /etc/nologin                    | limit the user login by the pam_nologin(8) module  |
| /etc/securetty                  | limit the tty for the root access by the pam_securetty(8) module                                   |
| /etc/security/access.conf       | set access limit by the pam_access(8) module   |
| /etc/security/group.conf        | set group based restraint by the pam_group(8) module   |
| /etc/security/pam_env.conf      | set environment variables by the pam_env(8) module   |
| /etc/environment                | set additional environment variables by the pam_env(8) module with the "readenv=1" argument        |
| /etc/default/locale             | set locale by pam_env(8) module with the "readenv=1 envfile=/etc/default/locale" argument (Debian) |
| /etc/security/limits.conf       | set resource restraint (ulimit, core, ...) by the pam_limits(8) module                             |
| /etc/security/time.conf         | set time restraint by the pam_time(8) module   |
| /etc/systemd/logind.conf        | set systemd login manager configuration (see logind.conf(5) and systemd-logind.service(8))         |

Table 4.6: List of configuration files accessed by PAM and NSS

The limitation of the password selection is implemented by the PAM modules, pam\_unix(8) and pam\_cracklib(8). They can be configured by their arguments.

**Tip**

PAM modules use suffix ".so" for their filenames.

### 4.5.2 The modern centralized system management

The modern centralized system management can be deployed using the centralized [Lightweight Directory Access Protocol \(LDAP\)](#) server to administer many Unix-like and non-Unix-like systems on the network. The open source implementation of the Lightweight Directory Access Protocol is [OpenLDAP Software](#).

The LDAP server provides the account information through the use of PAM and NSS with `libpam-ldapd` and `libnss-ldapd` packages for the Debian system. Several actions are required to enable this (I have not used this setup and the following is purely secondary information. Please read this in this context.).

- You set up a centralized LDAP server by running a program such as the stand-alone LDAP daemon, `slapd(8)`.
- You change the PAM configuration files in the `/etc/pam.d/` directory to use `pam_ldap.so` instead of the default `pam_unix.so`.
- You change the NSS configuration in the `/etc/nsswitch.conf` file to use `ldap` instead of the default (`compat` or `file`).
- You must make `libpam-ldapd` to use [SSL \(or TLS\)](#) connection for the security of password.
- You may make `libnss-ldapd` to use [SSL \(or TLS\)](#) connection to ensure integrity of data at the cost of the LDAP network overhead.
- You should run `nscd(8)` locally to cache any LDAP search results in order to reduce the LDAP network traffic.

See documentations in `nsswitch.conf(5)`, `pam.conf(5)`, `ldap.conf(5)`, and `/usr/share/doc/libpam-doc/html/` offered by the `libpam-doc` package and `info libc 'Name Service Switch'` offered by the `glibc-doc` package.

Similarly, you can set up alternative centralized systems with other methods.

- Integration of user and group with the Windows system.
  - Access [Windows domain](#) services by the `winbind` and `libpam_winbind` packages.
  - See `winbindd(8)` and [Integrating MS Windows Networks with Samba](#).
- Integration of user and group with the legacy Unix-like system.
  - Access [NIS \(originally called YP\)](#) or [NIS+](#) by the `nis` package.
  - See [The Linux NIS\(YP\)/NIS/NIS+ HOWTO](#).

### 4.5.3 "Why GNU su does not support the wheel group"

This is the famous phrase at the bottom of the old `info su` page by Richard M. Stallman. Not to worry: the current `su` command in Debian uses PAM, so that one can restrict the ability to use `su` to the root group by enabling the line with `pam_wheel.so` in `/etc/pam.d/su`.

### 4.5.4 Stricter password rule

Installing the `libpam-cracklib` package enables you to force stricter password rule.

On a typical GNOME system which automatically installs `libpam-gnome-keyring`, `/etc/pam.d/common-password` looks like:

```
# here are the per-package modules (the "Primary" block)
password requisite pam_cracklib.so retry=3 minlen=8 difok=3
password [success=1 default=ignore] pam_unix.so obscure use_authtok try_first_pass ↵
    yescrypt
# here's the fallback if no module succeeds
password requisite pam_deny.so
# prime the stack with a positive return value if there isn't one already;
# this avoids us returning an error just because nothing sets a success code
# since the modules above will each just jump around
password required pam_permit.so
# and here are more per-package modules (the "Additional" block)
password optional pam_gnome_keyring.so
# end of pam-auth-update config
```

## 4.6 Security of authentication

---

### Note

The information here **may not be sufficient** for your security needs but it should be a **good start**.

---

### 4.6.1 Secure password on the Internet

Many popular transportation layer services communicate messages including password authentication in the plain text. It is very bad idea to transmit password in the plain text over the wild Internet where it can be intercepted. You can run these services over "[Transport Layer Security](#)" (TLS) or its predecessor, "Secure Sockets Layer" (SSL) to secure entire communication including password by the encryption.

| insecure service name | port | secure service name | port |
|-----------------------|------|---------------------|------|
| www (http)            | 80   | https               | 443  |
| smtp (mail)           | 25   | ssmtp (smtps)       | 465  |
| ftp-data              | 20   | ftps-data           | 989  |
| ftp                   | 21   | ftps                | 990  |
| telnet                | 23   | telnets             | 992  |
| imap2                 | 143  | imaps               | 993  |
| pop3                  | 110  | pop3s               | 995  |
| ldap                  | 389  | ldaps               | 636  |

Table 4.7: List of insecure and secure services and ports

The encryption costs CPU time. As a CPU friendly alternative, you can keep communication in plain text while securing just the password with the secure authentication protocol such as "Authenticated Post Office Protocol" (APOP) for POP and "Challenge-Response Authentication Mechanism MD5" (CRAM-MD5) for SMTP and IMAP. (For sending mail messages over the Internet to your mail server from your mail client, it is recently popular to use new message submission port 587 instead of traditional SMTP port 25 to avoid port 25 blocking by the network provider while authenticating yourself with CRAM-MD5.)

### 4.6.2 Secure Shell

The [Secure Shell \(SSH\)](#) program provides secure encrypted communications between two untrusted hosts over an insecure network with the secure authentication. It consists of the [OpenSSH](#) client, `ssh(1)`, and the [OpenSSH](#) daemon, `sshd(8)`. This SSH can be used to tunnel an insecure protocol communication such as POP and X securely over the Internet with the port forwarding feature.

The client tries to authenticate itself using host-based authentication, public key authentication, challenge-response authentication, or password authentication. The use of public key authentication enables the remote password-less login. See [Section 6.3](#).

### 4.6.3 Extra security measures for the Internet

Even when you run secure services such as [Secure Shell \(SSH\)](#) and [Point-to-point tunneling protocol \(PPTP\)](#) servers, there are still chances for the break-ins using brute force password guessing attack etc. from the Internet. Use of the firewall policy (see [Section 5.7](#)) together with the following security tools may improve the security situation.

| package                       | popcon         | size | description   |
|-------------------------------|----------------|------|---|
| <a href="#">knockd</a>        | V:0.7, I:1.7   | 110  | small port-knock daemon knockd(1) and client knock(1) |
| <a href="#">fail2ban</a>      | V:101, I:111   | 2192 | ban IPs that cause multiple authentication errors     |
| <a href="#">libpam-shield</a> | V:0.06, I:0.06 | 115  | lock out remote attackers trying password guessing    |

Table 4.8: List of tools to provide extra security measures

#### 4.6.4 Securing the root password

To prevent people to access your machine with root privilege, you need to make following actions.

- Prevent physical access to the system storage device ([HDD](#) / [SSD](#) / ...)
- Lock UEFI/BIOS and prevent booting from the removable media
- Set password for GRUB interactive session
- Lock GRUB menu from editing

With physical access to the system storage device, resetting the password is relatively easy with following steps.

1. Move the system storage device to a PC with USB bootable UEFI/BIOS.
2. Boot system with a rescue media (see [Section 3.2.2](#)).
3. Mount root partition with read/write access.
4. Edit `/etc/passwd` in the root partition and make the second entry for the root account empty.

If you have edit access to the GRUB menu entry (see [Section 3.1.2](#)) for grub-rescue-pc at boot time, it is even easier with following steps.

1. Boot system with the kernel parameter changed to something like `"root=/dev/sda6 rw init=/bin/sh"`.
2. Edit `/etc/passwd` and make the second entry for the root account empty.
3. Reboot system.

The root shell of the system is now accessible without password.

---

##### Note

Once one has root shell access, he can access everything on the system and reset any passwords on the system. Further more, he may compromise password for all user accounts using brute force password cracking tools such as [john](#) and [crack](#) packages (see [Section 9.5.10](#)). This cracked password may lead to compromise other systems.

---

The only reasonable software solution to avoid all these concerns is to use software encrypted root partition (or `/etc` partition) using [dm-crypt](#) and [initramfs](#) (see [Section 9.9](#)). You always need password to boot the system, though.

## 4.7 Other access controls

There are access controls to the system other than the password based authentication and file permissions.

---

##### Note

See [Section 9.4.16](#) for restricting the kernel [secure attention key \(SAK\)](#) feature.

---

### 4.7.1 Access control lists (ACLs)

ACLs are a superset of the regular permissions as explained in Section 1.2.3.

You encounter ACLs in action on modern desktop environment. When a formatted USB storage device is auto mounted as, e.g., `/media/penguin/USBSTICK`, a normal user `penguin` can execute:

```
$ cd /media/penguin
$ ls -la
total 16
drwxr-x---+ 1 root    root    16 Jan 17 22:55 .
drwxr-xr-x  1 root    root    28 Sep 17 19:03 ..
drwxr-xr-x  1 penguin penguin 18 Jan  6 07:05 USBSTICK
```

"+" in the 11th column indicates ACLs are in action. Without ACLs, a normal user `penguin` shouldn't be able to list like this since `penguin` isn't in `root` group. You can see ACLs as:

```
$ getfacl .
# file: .
# owner: root
# group: root
user::rwx
user:penguin:r-x
group:---
mask:r-x
other:---
```

Here:

- "user::rwx", "group:---", and "other:---" correspond to the regular owner, group, and other permissions.
- The ACL "user:penguin:r-x" allows a normal user `penguin` to have "r-x" permissions. This enabled "`ls -la`" to list directory content.
- The ACL "mask:r-x" sets the upper bound of permissions.

See ["POSIX Access Control Lists on Linux"](#), `acl(5)`, `getfacl(1)`, and `setfacl(1)` for more.

### 4.7.2 sudo

`sudo(8)` is a program designed to allow a sysadmin to give limited root privileges to users and log root activity. `sudo` requires only an ordinary user's password. Install `sudo` package and activate it by setting options in `/etc/sudoers`. See configuration example at `/usr/share/doc/sudo/examples/sudoers` and Section 1.1.12.

My usage of `sudo` for the single user system (see Section 1.1.12) is aimed to protect myself from my own stupidity. Personally, I consider using `sudo` a better alternative than using the system from the root account all the time. For example, the following changes the owner of `some_file` to `my_name`.

```
$ sudo chown my_name some_file
```

Of course if you know the root password (as self-installed Debian users do), any command can be run under root from any user's account using `su -c`.

### 4.7.3 PolicyKit

[PolicyKit](#) is an operating system component for controlling system-wide privileges in Unix-like operating systems.

Newer GUI applications are not designed to run as privileged processes. They talk to privileged processes via PolicyKit to perform administrative operations.

PolicyKit limits such operations to user accounts belonging to the `sudo` group on the Debian system.

See `polkit(8)`.

## 4.7.4 Restricting access to some server services

For system security, it is a good idea to disable as much server programs as possible. This becomes critical for network servers. Having unused servers, activated either directly as [daemon](#) or via [super-server](#) program, are considered security risks.

Many programs, such as `sshd(8)`, use PAM based access control. There are many ways to restrict access to some server services.

- configuration files: `/etc/default/program_name`
- Systemd service unit configuration for [daemon](#)
- [PAM \(Pluggable Authentication Modules\)](#)
- `/etc/inetd.conf` for [super-server](#)
- `/etc/hosts.deny` and `/etc/hosts.allow` for [TCP wrapper](#), `tcpd(8)`
- `/etc/rpc.conf` for [Sun RPC](#)
- `/etc/at.allow` and `/etc/at.deny` for `atd(8)`
- `/etc/cron.allow` and `/etc/cron.deny` for `crontab(1)`
- [Network firewall](#) of [netfilter](#) infrastructure

See Section 3.6, Section 4.5.1, and Section 5.7.

---

**Tip**

[Sun RPC](#) services need to be active for [NFS](#) and other RPC based programs.

---

---

**Tip**

If you have problems with remote access in a recent Debian system, comment out offending configuration such as `"ALL: PARANOID"` in `/etc/hosts.deny` if it exists. (But you must be careful on security risks involved with this kind of action.)

---

## 4.7.5 Linux security features

Linux kernel has evolved and supports security features not found in traditional UNIX implementations.

Linux supports [extended attributes](#) which extend the traditional UNIX attributes (see `xattr(7)`).

Linux divides the privileges traditionally associated with superuser into distinct units, known as [capabilities\(7\)](#), which can be independently enabled and disabled. Capabilities are a per-thread attribute since kernel version 2.2.

The [Linux Security Module \(LSM\) framework](#) provides a [mechanism for various security checks](#) to be hooked by new kernel extensions. For example:

- [AppArmor](#)
  - [Security-Enhanced Linux \(SELinux\)](#)
  - [Smack \(Simplified Mandatory Access Control Kernel\)](#)
  - [Tomoyo Linux](#)
-



Since these extensions may tighten privilege model tighter than the ordinary Unix-like security model policies, even the root power may be restricted. You are advised to read the [Linux Security Module \(LSM\) framework document at kernel.org](#).

Linux [namespaces](#) wrap a global system resource in an abstraction that makes it appear to the processes within the namespace that they have their own isolated instance of the global resource. Changes to the global resource are visible to other processes that are members of the namespace, but are invisible to other processes. Since kernel version 5.6, there are 8 kinds of namespaces (see `namespaces(7)`, `unshare(1)`, `nsenter(1)`).

As of Debian 11 Bullseye (2021), Debian uses unified cgroup hierarchy (a.k.a. [cgroups-v2](#)).

Usage examples of [namespaces](#) with [cgroups](#) to isolate their processes and to allow resource control are:

- [Systemd](#). See Section [3.3.1](#).
- [Sandbox environment](#). See Section [7.7](#).
- [Linux containers](#) such as [Docker](#), [LXC](#). See Section [9.11](#).

These functionalities can't be realized by Section [4.1](#). These advanced topics are mostly out-of-scope for this introductory document.

## Chapter 5

# Network setup

---

**Tip**

For modern Debian specific guide to the networking, read [The Debian Administrator's Handbook — Configuring the Network](#).

---

---

**Tip**

Under [systemd](#), [networkd](#) may be used to manage networks. See `systemd-networkd(8)`.

---

### 5.1 The basic network infrastructure

Let's review the basic network infrastructure on the modern Debian system.

#### 5.1.1 The hostname resolution

The hostname resolution is currently supported by the [NSS \(Name Service Switch\)](#) mechanism too. The flow of this resolution is the following.

1. The `/etc/nsswitch.conf` file with stanza like `hosts: files dns` dictates the hostname resolution order. (This replaces the old functionality of the `order` stanza in `/etc/host.conf`.)
2. The `files` method is invoked first. If the hostname is found in the `/etc/hosts` file, it returns all valid addresses for it and exits. (The `/etc/host.conf` file contains `multi on`.)
3. The `dns` method is invoked. If the hostname is found by the query to the [Internet Domain Name System \(DNS\)](#) identified by the `/etc/resolv.conf` file, it returns all valid addresses for it and exits.

A typical workstation may be installed with its host name set to, e.g., `host_name` and its optional domain name set to an empty string. Then, `/etc/hosts` looks like the following.

```
127.0.0.1 localhost
127.0.1.1 host_name

# The following lines are desirable for IPv6 capable hosts
::1      localhost ip6-localhost ip6-loopback
ff02::1  ip6-allnodes
ff02::2  ip6-allrouters
```

| packages                              | popcon          | size  | type                | description   |
|---------------------------------------|-----------------|-------|---------------------|---|
| <a href="#">network-manager</a>       | V:423,<br>I:470 | 6996  | config::NM          | <a href="#">NetworkManager</a> (daemon): manage the network automatically   |
| <a href="#">network-manager-gnome</a> | V:43,<br>I:167  | 18    | config::NM          | <a href="#">NetworkManager</a> (GNOME frontend)   |
| <a href="#">netplan.io</a>            | V:2.5,<br>I:8.5 | 340   | config::NM+networkd | <a href="#">Netplan</a> (generator): Unified, declarative interface to <a href="#">NetworkManager</a> and <a href="#">systemd-networkd</a> backends |
| <a href="#">ifupdown</a>              | V:641,<br>I:973 | 201   | config::ifupdown    | standardized tool to bring up and down the network (Debian specific)  |
| <a href="#">pppoeconf</a>             | V:0.2,<br>I:4.1 | 176   | config::helper      | configuration helper for PPPoE connection   |
| <a href="#">wpa_supplicant</a>        | V:409,<br>I:514 | 3896  | config::helper      | client support for WPA and WPA2 (IEEE 802.11i)  |
| <a href="#">wpa_gui</a>               | V:0.2,<br>I:1.3 | 779   | config::helper      | Qt GUI client for wpa_supplicant  |
| <a href="#">wireless-tools</a>        | V:191,<br>I:258 | 225   | config::helper      | tools for manipulating Linux Wireless Extensions  |
| <a href="#">iw</a>                    | V:37,<br>I:474  | 332   | config::helper      | tool for configuring Linux wireless devices   |
| <a href="#">iproute2</a>              | V:776,<br>I:986 | 4123  | config::iproute2    | <a href="#">iproute2</a> , IPv6 and other advanced network configuration: <a href="#">ip(8)</a> , <a href="#">tc(8)</a> , etc                       |
| <a href="#">iptables</a>              | V:376,<br>I:638 | 2408  | config::Netfilter   | administration tools for packet filtering and NAT ( <a href="#">Netfilter</a> )   |
| <a href="#">nftables</a>              | V:246,<br>I:866 | 189   | config::Netfilter   | administration tools for packet filtering and NAT ( <a href="#">Netfilter</a> ) (successor to {ip,ip6,arp,eb}tables)                                |
| <a href="#">iputils-ping</a>          | V:198,<br>I:997 | 188   | test                | test network reachability of a remote host by <a href="#">hostname</a> or <a href="#">IP address</a> ( <a href="#">iproute2</a> )                   |
| <a href="#">iputils-arping</a>        | V:2,<br>I:18    | 53    | test                | test network reachability of a remote host specified by the <a href="#">ARP</a> address   |
| <a href="#">iputils-tracepath</a>     | V:2,<br>I:20    | 50    | test                | trace the network path to a remote host   |
| <a href="#">ethtool</a>               | V:96,<br>I:254  | 1088  | test                | display or change Ethernet device settings  |
| <a href="#">mtr-tiny</a>              | V:4,<br>I:39    | 181   | test::low-level     | trace the network path to a remote host (curses)  |
| <a href="#">mtr</a>                   | V:4,<br>I:41    | 230   | test::low-level     | trace the network path to a remote host (curses and GTK)  |
| <a href="#">gnome-nettool</a>         | V:0.5,<br>I:9.0 | 2480  | test::low-level     | tools for common network information operations (GNOME)   |
| <a href="#">nmap</a>                  | V:25,<br>I:185  | 4766  | test::low-level     | network mapper / port scanner ( <a href="#">Nmap</a> , console)   |
| <a href="#">tcpdump</a>               | V:18,<br>I:174  | 1346  | test::low-level     | network traffic analyzer ( <a href="#">Tcpdump</a> , console)   |
| <a href="#">wireshark</a>             | V:4,<br>I:39    | 17068 | test::low-level     | network traffic analyzer ( <a href="#">Wireshark</a> , GTK)   |
| <a href="#">tshark</a>                | V:2,<br>I:23    | 433   | test::low-level     | network traffic analyzer (console)  |
| <a href="#">tcptrace</a>              | V:0.2,<br>I:1.6 | 407   | test::low-level     | produce a summarization of the connections from <a href="#">tcpdump</a> output  |
| <a href="#">dnsutils</a>              | V:5,<br>I:161   | 23    | test::low-level     | network clients provided with <a href="#">BIND</a> : <a href="#">nslookup(8)</a> , <a href="#">nsupdate(8)</a> , <a href="#">dig(8)</a>             |
| <a href="#">dlint</a>                 | V:0.1,<br>I:2.2 | 52    | test::low-level     | check <a href="#">DNS</a> zone information using nameserver lookups   |
| <a href="#">dnstracer</a>             | V:0.1,<br>I:1.2 | 59    | test::low-level     | trace a chain of <a href="#">DNS</a> servers to the source  |

Table 5.1: List of network configuration tools

Each line starts with a [IP address](#) and it is followed by the associated [hostname](#).

The IP address 127.0.1.1 in the second line of this example may not be found on some other Unix-like systems. The [Debian Installer](#) creates this entry for a system without a permanent IP address as a workaround for some software (e.g., GNOME) as documented in the [bug #719621](#).

The *host\_name* matches the hostname defined in the `/etc/hostname` (see [Section 3.8.1](#)).

For a system with a permanent IP address, that permanent IP address should be used here instead of 127.0.1.1.

For a system with a permanent IP address and a [fully qualified domain name \(FQDN\)](#) provided by the [Domain Name System \(DNS\)](#), that canonical *host\_name.domain\_name* should be used instead of just *host\_name*.

The `/etc/resolv.conf` is a static file if the `resolvconf` package is not installed. If installed, it is a symbolic link. Either way, it contains information that initialize the resolver routines. If the DNS is found at IP="192.168.11.1", it contains the following.

```
nameserver 192.168.11.1
```

The `resolvconf` package makes this `/etc/resolv.conf` into a symbolic link and manages its contents by the hook scripts automatically.

For the PC workstation on the typical adhoc LAN environment, the hostname can be resolved via [Multicast DNS](#) (mDNS) in addition to the basic files and dns methods.

- [Avahi](#) provides a framework for Multicast DNS Service Discovery on Debian.
- It is equivalent of [Apple Bonjour](#) / [Apple Rendezvous](#).
- The `libnss-mdns` plugin package provides host name resolution via mDNS for the GNU Name Service Switch (NSS) functionality of the GNU C Library (glibc).
- The `/etc/nsswitch.conf` file should have stanza like "hosts: files mdns4\_minimal [NOTFOUND=return] dns" (see `/usr/share/doc/libnss-mdns/README.Debian` for other configurations).
- A host name suffixed with the [".local"](#) [pseudo-top-level domain](#) is resolved by sending a mDNS query message in a multicast UDP packet using IPv4 address "224.0.0.251" or IPv6 address "FF02::FB".

---

**Note**

The [expansion of generic Top-Level Domains \(gTLD\)](#) in the [Domain Name System](#) is underway. Watch out for the [name collision](#) when choosing a domain name used only within LAN.

---

---

**Note**

Use of packages such as `libnss-resolve` together with `systemd-resolved`, or `libnss-myhostname`, or `libnss-mymachine`, with corresponding listings on the "hosts" line in the `/etc/nsswitch.conf` file may override the traditional network configuration discussed in the above. See `nss-resolve(8)`, `systemd-resolved(8)`, `nss-myhostname(8)`, and `nss-mymachines(8)` for more.

---

## 5.1.2 The network interface name

The `systemd` uses ["Predictable Network Interface Names"](#) such as `enp0s25`.

| Class | network addresses           | net mask      | net mask /bits | number of subnets |
|-------|-----------------------------|---------------|----------------|-------------------|
| A     | 10.x.x.x                    | 255.0.0.0     | /8             | 1                 |
| B     | 172.16.x.x — 172.31.x.x     | 255.255.0.0   | /16            | 16                |
| C     | 192.168.0.x — 192.168.255.x | 255.255.255.0 | /24            | 256               |

Table 5.2: List of network address ranges

### 5.1.3 The network address range for the LAN

Let us be reminded of the IPv4 32 bit address ranges in each class reserved for use on the [local area networks \(LANs\)](#) by [rfc1918](#). These addresses are guaranteed not to conflict with any addresses on the Internet proper.

---

#### Note

IP address written with colon are [IPv6 address](#), e.g., ":::1" for localhost.

---



---

#### Note

If one of these addresses is assigned to a host, then that host must not access the Internet directly but must access it through a gateway that acts as a proxy for individual services or else does [Network Address Translation \(NAT\)](#). The broadband router usually performs NAT for the consumer LAN environment.

---

### 5.1.4 The network device support

Although most hardware devices are supported by the Debian system, there are some network devices which require [DFSG](#) non-free firmware to support them. Please see Section [9.10.5](#).

## 5.2 The modern network configuration for desktop

Network interfaces are typically initialized in "networking.service" for the lo interface and "NetworkManager.service" for other interfaces on modern Debian desktop system under systemd.

Debian can manage the network connection via management [daemon](#) software such as [NetworkManager \(NM\)](#) (network-manager and associated packages).

- They come with their own [GUI](#) and command-line programs as their user interfaces.
- They come with their own [daemon](#) as their backend system.
- They allow easy connection of your system to the Internet.
- They allow easy management of wired and wireless network configuration.
- They allow us to configure network independent of the legacy `ifupdown` package.

---

#### Note

Do not use these automatic network configuration tools for servers. These are aimed primarily for mobile desktop users on laptops.

---

These modern network configuration tools need to be configured properly to avoid conflicting with the legacy `ifupdown` package and its configuration file `" /etc/network/interfaces"`.

---

### 5.2.1 GUI network configuration tools

Official documentations for NM on Debian are provided in `"/usr/share/doc/network-manager/README.Debian"`. Essentially, the network configuration for desktop is done as follows.

1. Make desktop user, e.g. `foo`, belong to group `"netdev"` by the following (Alternatively, do it automatically via [D-bus](#) under modern desktop environments such as GNOME and KDE).

```
$ sudo usermod -a -G netdev foo
```

2. Keep configuration of `"/etc/network/interfaces"` as simple as in the following.

```
auto lo
iface lo inet loopback
```

3. Restart NM by the following.

```
$ sudo systemctl restart NetworkManager
```

4. Configure your network via GUI.

---

#### Note

Only interfaces which are **not** listed in `"/etc/network/interfaces"` are managed by NM to avoid conflict with `ifupdown`.

---

---

#### Tip

If you wish to extend network configuration capabilities of NM, please seek appropriate plug-in modules and supplemental packages such as `network-manager-openconnect`, `network-manager-openvpn-gnome`, `network-manager-pptp-gnome`, `mobile-broadband-provider-info`, `gnome-bluetooth`, etc.

---

## 5.3 The modern network configuration without GUI

Under [systemd](#), the network may be configured in `/etc/systemd/network/` instead. See `systemd-resolved(8)`, `resolved.conf(5)`, and `systemd-networkd(8)`.

This allows the modern network configuration without GUI.

A DHCP client configuration can be set up by creating `"/etc/systemd/network/dhcp.network"`. E.g.:

```
[Match]
Name=en*

[Network]
DHCP=yes
```

A static network configuration can be set up by creating `"/etc/systemd/network/static.network"`. E.g.:

```
[Match]
Name=en*

[Network]
Address=192.168.0.15/24
Gateway=192.168.0.1
```

---

## 5.4 The modern network configuration for cloud

The modern network configuration for cloud may use `cloud-init` and `netplan.io` packages (see Section 3.8.4). The `netplan.io` package supports `systemd-networkd` and `NetworkManager` as its network configuration backends, and enables the declarative network configuration using [YAML](#) data. When you change YAML:

- Run `"netplan generate"` command to generate all the necessary backend configuration from [YAML](#).
- Run `"netplan apply"` command to apply the generated configuration to the backends.

See ["Netplan documentation"](#), `netplan(5)`, `netplan-generate(8)`, and `netplan-apply(8)`.

See also ["Cloud-init documentation"](#) (especially around ["Configuration sources"](#) and ["Netplan Passthrough"](#)) for how `cloud-init` can integrate `netplan.io` configuration with alternative data sources.

### 5.4.1 The modern network configuration for cloud with DHCP

A DHCP client configuration can be set up by creating a data source file `"/etc/netplan/50-dhcp.yaml"`:

```
network:
  version: 2
  ethernets:
    all-en:
      match:
        name: "en*"
      dhcp4: true
      dhcp6: true
```

### 5.4.2 The modern network configuration for cloud with static IP

A static network configuration can be set up by creating a data source file `"/etc/netplan/50-static.yaml"`:

```
network:
  version: 2
  ethernets:
    eth0:
      addresses:
        - 192.168.0.15/24
      routes:
        - to: default
          via: 192.168.0.1
```

### 5.4.3 The modern network configuration for cloud with Network Manager

The network client configuration using Network Manager infrastructure can be set up by creating a data source file `"/etc/netplan/00-network-manager.yaml"`:

```
network:
  version: 2
  renderer: NetworkManager
```

## 5.5 The low level network configuration

For the low level network configuration on Linux, use the [iproute2](#) programs (`ip(8)`, ...).

### 5.5.1 Iproute2 commands

[Iproute2](#) commands offer complete low-level network configuration capabilities. Here is a translation table from obsolete [net-tools](#) commands to new [iproute2](#) etc. commands.

| obsolete net-tools       | new iproute2 etc.        | manipulation                                   |
|--------------------------|--------------------------|--|
| <code>ifconfig(8)</code> | <code>ip addr</code>     | protocol (IP or IPv6) address on a device      |
| <code>route(8)</code>    | <code>ip route</code>    | routing table entry                            |
| <code>arp(8)</code>      | <code>ip neigh</code>    | ARP or NDISC cache entry                       |
| <code>ipmaddr</code>     | <code>ip maddr</code>    | multicast address                              |
| <code>iptunnel</code>    | <code>ip tunnel</code>   | tunnel over IP                                 |
| <code>nameif(8)</code>   | <code>ifrename(8)</code> | name network interfaces based on MAC addresses |
| <code>mii-tool(8)</code> | <code>ethtool(8)</code>  | Ethernet device settings                       |

Table 5.3: Translation table from obsolete `net - tools` commands to new `iproute2` commands

See `ip(8)` and [Linux Advanced Routing & Traffic Control](#).

### 5.5.2 Safe low level network operations

You may use low level network commands as follows safely since they do not change network configuration.

| command   | description   |
|---|---|
| <code>ip addr show</code>                                       | display the link and address status of active interfaces  |
| <code>route -n</code>   | display all the routing table in numerical addresses  |
| <code>ip route show</code>                                      | display all the routing table in numerical addresses  |
| <code>arp</code>  | display the current content of the <a href="#">ARP</a> cache tables                                     |
| <code>ip neigh</code>   | display the current content of the <a href="#">ARP</a> cache tables                                     |
| <code>plog</code>   | display ppp daemon log  |
| <code>ping yahoo.com</code>                                     | check the Internet connection to "yahoo.com"  |
| <code>whois yahoo.com</code>                                    | check who registered "yahoo.com" in the domains database  |
| <code>traceroute yahoo.com</code>                               | trace the Internet connection to "yahoo.com"  |
| <code>tracepath yahoo.com</code>                                | trace the Internet connection to "yahoo.com"  |
| <code>mtr yahoo.com</code>                                      | trace the Internet connection to "yahoo.com" (repeatedly)   |
| <code>dig [@dns-server.com]<br/>example.com [{a mx any}]</code> | check <a href="#">DNS</a> records of "example.com" by "dns-server.com" for a "a", "mx", or "any" record |
| <code>iptables -L -n</code>                                     | check packet filter   |
| <code>ss -a</code>  | find all open ports   |
| <code>ss -l</code>  | find listening ports  |
| <code>ss -l -t -n</code>  | find listening TCP ports (numeric)  |
| <code>dlint example.com</code>                                  | check DNS zone information of "example.com"   |

Table 5.4: List of low level network commands



**Tip**

Some of these low level network configuration tools reside in `/usr/sbin/`. You may need to issue full command path such as `/usr/sbin/ifconfig` or add `/usr/sbin` to the `$PATH` list in your `~/.bashrc`.

## 5.6 Network optimization

Generic network optimization is beyond the scope of this documentation. I touch only subjects pertinent to the consumer grade connection.

| packages                  | popcon         | size | description   |
|---------------------------|----------------|------|---|
| <a href="#">iftop</a>     | V:6, I:89      | 93   | display bandwidth usage information on an network interface |
| <a href="#">iperf</a>     | V:2, I:35      | 431  | Internet Protocol bandwidth measuring tool                  |
| <a href="#">ifstat</a>    | V:0.7, I:5.5   | 52   | InterFace STATistics Monitoring                             |
| <a href="#">bmon</a>      | V:2, I:20      | 141  | portable bandwidth monitor and rate estimator               |
| <a href="#">ethstatus</a> | V:0.3, I:2.5   | 41   | script that quickly measures network device throughput      |
| <a href="#">bing</a>      | V:0.08, I:0.51 | 80   | empirical stochastic bandwidth tester                       |
| <a href="#">bwm-ng</a>    | V:1.1, I:9.8   | 95   | small and simple console-based bandwidth monitor            |
| <a href="#">ethstats</a>  | V:0.05, I:0.39 | 21   | console-based Ethernet statistics monitor                   |
| <a href="#">ipfm</a>      | V:0.05, I:0.12 | 78   | bandwidth analysis tool                                     |

Table 5.5: List of network optimization tools

### 5.6.1 Finding optimal MTU

NM normally sets optimal [Maximum Transmission Unit \(MTU\)](#) automatically.

In some occasion, you may wish to set MTU manually after experiments with `ping(8)` with `-M do` option to send a ICMP packet with various data packet size. MTU is the maximum succeeding data packet size without IP fragmentation plus 28 bytes for the IPv4 and plus 48 bytes for the IPv6. For example the following finds MTU for IPv4 connection to be 1460 and MTU for IPv6 connection to be 1500.

```
$ ping -4 -c 1 -s $((1500-28)) -M do www.debian.org
PING (149.20.4.15) 1472(1500) bytes of data.
ping: local error: message too long, mtu=1460

--- ping statistics ---
1 packets transmitted, 0 received, +1 errors, 100% packet loss, time 0ms

$ ping -4 -c 1 -s $((1460-28)) -M do www.debian.org
PING (130.89.148.77) 1432(1460) bytes of data.
1440 bytes from klecker-misc.debian.org (130.89.148.77): icmp_seq=1 ttl=50 time=325 ms

--- ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 325.318/325.318/325.318/0.000 ms
$ ping -6 -c 1 -s $((1500-48)) -M do www.debian.org
PING www.debian.org(mirror-csail.debian.org (2603:400a:ffff:bb8::801f:3e)) 1452 data bytes
1460 bytes from mirror-csail.debian.org (2603:400a:ffff:bb8::801f:3e): icmp_seq=1 ttl=47 ↔
time=191 ms
```

```
--- www.debian.org ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 191.332/191.332/191.332/0.000 ms
```

This process is [Path MTU \(PMTU\) discovery \(RFC1191\)](#) and the `tracert`(8) command can automate this.

| network environment               | MTU  | rationale            |
|-----------------------------------|------|----------------------|
| Dial-up link (IP: PPP)            | 576  | standard             |
| Ethernet link (IP: DHCP or fixed) | 1500 | standard and default |

Table 5.6: Basic guide lines of the optimal MTU value

In addition to these basic guide lines, you should know the following.

- Any use of tunneling methods ([VPN](#) etc.) may reduce optimal MTU further by their overheads.
- The MTU value should not exceed the experimentally determined PMTU value.
- The bigger MTU value is generally better when other limitations are met.

The [maximum segment size](#) (MSS) is used as an alternative measure of packet size. The relationship between MSS and MTU are the following.

- $MSS = MTU - 40$  for IPv4
- $MSS = MTU - 60$  for IPv6

---

#### Note

The `iptables`(8) (see Section 5.7) based optimization can clamp packet size by the MSS and is useful for the router. See "TCPMSS" in `iptables`(8).

---

## 5.6.2 WAN TCP optimization

The TCP throughput can be maximized by adjusting TCP buffer size parameters as in "[TCP tuning](#)" for the modern high-bandwidth and high-latency WAN. So far, the current Debian default settings serve well even for my LAN connected by the fast 1G bps FTTP service.

## 5.7 Netfilter infrastructure

[Netfilter](#) provides infrastructure for [stateful firewall](#) and [network address translation \(NAT\)](#) with [Linux kernel](#) modules (see Section 3.10).

Main user space program of [netfilter](#) is `iptables`(8). You can manually configure [netfilter](#) interactively from shell, save its state with `iptables-save`(8), and restore it via init script with `iptables-restore`(8) upon system reboot.

Configuration helper scripts such as [shorewall](#) ease this process.

See documentations at [Netfilter Documentation](#) (or in `/usr/share/doc/iptables/html/`).

- [Linux Networking-concepts HOWTO](#)
  - [Linux 2.4 Packet Filtering HOWTO](#)
-

| packages                        | popcon         | size | description   |
|---------------------------------|----------------|------|---|
| <a href="#">nftables</a>        | V:246, I:866   | 189  | administration tools for packet filtering and NAT ( <a href="#">Netfilter</a> ) (successor to {ip,ip6,arp,eb}tables)              |
| <a href="#">iptables</a>        | V:376, I:638   | 2408 | administration tools for <a href="#">netfilter</a> ( <a href="#">iptables(8)</a> for IPv4, <a href="#">ip6tables(8)</a> for IPv6) |
| <a href="#">arptables</a>       | V:0.1, I:1.7   | 102  | administration tools for <a href="#">netfilter</a> ( <a href="#">arptables(8)</a> for ARP)  |
| <a href="#">ebtables</a>        | V:15, I:24     | 276  | administration tools for <a href="#">netfilter</a> ( <a href="#">ebtables(8)</a> for Ethernet bridging)                           |
| <a href="#">iptstate</a>        | V:0.2, I:1.7   | 122  | continuously monitor <a href="#">netfilter</a> state (similar to <a href="#">top(1)</a> )   |
| <a href="#">ufw</a>             | V:79, I:105    | 859  | <a href="#">Uncomplicated Firewall (UFW)</a> is a program for managing a <a href="#">netfilter</a> firewall                       |
| <a href="#">gufw</a>            | V:6, I:11      | 3663 | graphical user interface for <a href="#">Uncomplicated Firewall (UFW)</a>   |
| <a href="#">firewalld</a>       | V:15, I:23     | 2558 | <a href="#">firewalld</a> is a dynamically managed firewall program with support for network zones                                |
| <a href="#">firewall-config</a> | V:0.7, I:3.3   | 1096 | graphical user interface for <a href="#">firewalld</a>  |
| <a href="#">shorewall-init</a>  | V:0.21, I:0.41 | 88   | <a href="#">Shoreline Firewall</a> initialization   |
| <a href="#">shorewall</a>       | V:2.3, I:5.1   | 3090 | <a href="#">Shoreline Firewall</a> , <a href="#">netfilter</a> configuration file generator                                       |
| <a href="#">shorewall-lite</a>  | V:0.03, I:0.06 | 71   | <a href="#">Shoreline Firewall</a> , <a href="#">netfilter</a> configuration file generator (light version)                       |
| <a href="#">shorewall6</a>      | V:0.7, I:1.3   | 1334 | <a href="#">Shoreline Firewall</a> , <a href="#">netfilter</a> configuration file generator (IPv6 version)                        |
| <a href="#">shorewall6-lite</a> | V:0.02, I:0.03 | 71   | <a href="#">Shoreline Firewall</a> , <a href="#">netfilter</a> configuration file generator (IPv6, light version)                 |

Table 5.7: List of firewall tools

- [Linux 2.4 NAT HOWTO](#)

**Tip**

Although these were written for Linux **2.4**, both `iptables(8)` command and `netfilter` kernel function apply for Linux **2.6** and **3.x** kernel series.

## Chapter 6

# Network applications

After establishing network connectivity (see Chapter 5), you can run various network applications.

---

### Tip

For modern Debian specific guide to the network infrastructure, read [The Debian Administrator's Handbook — Network Infrastructure](#).

---



---

### Tip

If you enabled "2-Step Verification" with some ISP, you need to obtain an application password to access POP and SMTP services from your program. You may need to approve your host IP in advance.

---

## 6.1 Web browsers

There are many [web browser](#) packages to access remote contents with [Hypertext Transfer Protocol](#) (HTTP).

| package                          | popcon                       | size                   | type     | description of web browser  |
|----------------------------------|------------------------------|------------------------|----------|---|
| <a href="#">chromium</a>         | <a href="#">V:29, I:101</a>  | <a href="#">302260</a> | X        | <a href="#">Chromium</a> , (open-source browser from Google)                                    |
| <a href="#">firefox</a>          | <a href="#">V:15, I:21</a>   | <a href="#">294791</a> | , ,      | <a href="#">Firefox</a> , (open-source browser from Mozilla, only available in Debian Unstable) |
| <a href="#">firefox-esr</a>      | <a href="#">V:192, I:426</a> | <a href="#">265874</a> | , ,      | <a href="#">Firefox ESR</a> , (Firefox Extended Support Release)                                |
| <a href="#">epiphany-browser</a> | <a href="#">V:2, I:11</a>    | <a href="#">6666</a>   | , ,      | <a href="#">GNOME</a> , <a href="#">HIG</a> compliant, <a href="#">Epiphany</a>                 |
| <a href="#">konqueror</a>        | <a href="#">V:26, I:112</a>  | <a href="#">7982</a>   | , ,      | <a href="#">KDE</a> , <a href="#">Konqueror</a>   |
| <a href="#">dillo</a>            | <a href="#">V:0.5, I:4.1</a> | <a href="#">1585</a>   | , ,      | <a href="#">Dillo</a> , (light weight browser, <a href="#">FLTK</a> based)                      |
| <a href="#">w3m</a>              | <a href="#">V:11, I:137</a>  | <a href="#">2853</a>   | text     | <a href="#">w3m</a>   |
| <a href="#">lynx</a>             | <a href="#">V:28, I:449</a>  | <a href="#">2031</a>   | , ,      | <a href="#">Lynx</a>  |
| <a href="#">elinks</a>           | <a href="#">V:3, I:16</a>    | <a href="#">1789</a>   | , ,      | <a href="#">ELinks</a>  |
| <a href="#">links</a>            | <a href="#">V:2, I:21</a>    | <a href="#">2321</a>   | , ,      | <a href="#">Links</a> (text only)   |
| <a href="#">links2</a>           | <a href="#">V:1, I:10</a>    | <a href="#">5466</a>   | graphics | <a href="#">Links</a> (console graphics without X)  |

Table 6.1: List of web browsers

---

### 6.1.1 Spoofing the User-Agent string

In order to access some overly restrictive web sites, you may need to spoof the [User-Agent](#) string returned by the web browser program. See:

- [MDN Web Docs: userAgent](#)
- [Chrome Developers: Override the user agent string](#)
- [How to change your user agent](#)
- [How to Change User-Agent in Chrome, Firefox, Safari, and more](#)
- [How to Change Your Browser's User Agent Without Installing Any Extensions](#)
- [How to change the User Agent in Gnome Web \(epiphany\)](#)

### 6.1.2 Browser extension

All modern GUI browsers support source code based [browser extension](#) and it is becoming standardized as [web extensions](#).

## 6.2 The mail system

This section focuses on typical mobile workstations on consumer grade Internet connections.



#### Caution

If you are to set up the mail server to exchange mail directly with the Internet, you should be better than reading this elementary document.

---

### 6.2.1 Email basics

An [email](#) message consists of three components, the message envelope, the message header, and the message body.

- The "To" and "From" information in the message envelope is used by the [SMTP](#) to deliver the email. (The "From" information in the message envelope is also called [bounce address](#), `From_`, etc.).
- The "To" and "From" information in the message header is displayed by the [email client](#). (While it is most common for these to be the same as ones in the message envelope, such is not always the case.)
- The email message format covering header and body data is extended by [Multipurpose Internet Mail Extensions \(MIME\)](#) from the plain ASCII text to other character encodings, as well as attachments of audio, video, images, and application programs.

Full featured GUI based [email clients](#) offer all the following functions using the GUI based intuitive configuration.

- It creates and interprets the message header and body data using [Multipurpose Internet Mail Extensions \(MIME\)](#) to deal the content data type and encoding.
  - It authenticates itself to the ISP's SMTP and IMAP servers using the legacy [basic access authentication](#) or modern [OAuth 2.0](#). (For [OAuth 2.0](#), set it via Desktop environment settings. E.g., "Settings" -> "Online Accounts".)
-

- It sends the message to the ISP's smarthost SMTP server listening to the message submission port (587).
- It receives the stored message on the ISP's server from the TLS/IMAP4 port (993).
- It can filter mails by their attributes.
- It may offer additional functionalities: Contacts, Calendar, Tasks, Memos.

| package                     | popcon            | size   | type   |
|-----------------------------|-------------------|--------|--|
| <a href="#">evolution</a>   | V:26, I:228       | 488    | X GUI program (GNOME, groupware suite)                         |
| <a href="#">thunderbird</a> | V:42, I:105       | 274189 | X GUI program (GTK, <a href="#">Mozilla Thunderbird</a> )      |
| <a href="#">kmail</a>       | V:43, I:103       | 25270  | X GUI program (KDE)  |
| <a href="#">mutt</a>        | V:11, I:89        | 7332   | character terminal program probably used with <code>vim</code> |
| <a href="#">mew</a>         | V:0.02,<br>I:0.16 | 2319   | character terminal program under (x)emacs                      |

Table 6.2: List of mail user agent (MUA)

## 6.2.2 Modern mail service limitation

Modern mail service are under some limitations in order to minimize exposure to the spam (unwanted and unsolicited email) problems.

- It is not realistic to run SMTP server on the consumer grade network to send mail directly to the remote host reliably.
- A mail may be rejected by any host en route to the destination quietly unless it appears as authentic as possible.
- It is not realistic to expect a single smarthost to send mails of unrelated source mail addresses to the remote host reliably.

This is because:

- The SMTP port (25) connections from hosts serviced by the consumer grade network to the Internet are blocked.
- The SMTP port (25) connections to hosts serviced by the consumer grade network from the Internet are blocked.
- The outgoing messages from hosts serviced by the consumer grade network to the Internet can only be sent via the message submission port (587).
- [Anti-spam techniques](#) such as [DomainKeys Identified Mail \(DKIM\)](#), [Sender\\_Policy\\_Framework \(SPF\)](#), and [Domain-based Message Authentication, Reporting and Conformance \(DMARC\)](#) are widely used for the [email filtering](#).
- The [DomainKeys Identified Mail](#) service may be provided for your mail sent through the smarthost.
- The smarthost may rewrite the source mail address in the message header to your mail account on the smarthost to prevent email address spoofing.

## 6.2.3 Historic mail service expectation

Some programs on Debian expect to access the `/usr/sbin/sendmail` command to send emails as their default or customized setting since the mail service on a UNIX system functioned historically as:

- An email is created as a text file.
- The email is handed to the `/usr/sbin/sendmail` command.

- For the destination address on the same host, the `/usr/sbin/sendmail` command makes local delivery of the email by appending it to the `/var/mail/$username` file.
  - Commands expecting this feature: `apt - listchanges`, `cron`, `at`, ...
- For the destination address on the remote host, the `/usr/sbin/sendmail` command makes remote transfer of the email to the destination host found by the DNS MX record using SMTP.
  - Commands expecting this feature: `popcon`, `reportbug`, `bts`, ...

## 6.2.4 Mail transport agent (MTA)

Debian mobile workstations can be configured just with full featured GUI based [email clients](#) without [mail transfer agent \(MTA\)](#) program after Debian 12 Bookworm.

Debian traditionally installed some MTA program to support programs expecting the `/usr/sbin/sendmail` command. Such MTA on mobile workstations must cope with Section 6.2.2 and Section 6.2.3.

For mobile workstations, the typical choice of MTA is either `exim4-daemon-light` or `postfix` with its installation option such as "Mail sent by smarthost; received via SMTP or fetchmail" selected. These are light weight MTAs that respect `/etc/aliases`.

### Tip

Configuring `exim4` to send the Internet mail via multiple corresponding smarthosts for multiple source email addresses is non-trivial. If you need such capability for some programs, set them up to use `msmtp` which is easy to set up for multiple source email addresses. Then leave main MTA only for a single email address.

| package                            | popcon       | size | description  |
|------------------------------------|--------------|------|--|
| <a href="#">exim4-daemon-light</a> | V:211, I:219 | 1637 | Exim4 mail transport agent (MTA: Debian default)                           |
| <a href="#">exim4-daemon-heavy</a> | V:5.1, I:5.2 | 1802 | Exim4 mail transport agent (MTA: flexible alternative)                     |
| <a href="#">exim4-base</a>         | V:217, I:224 | 1634 | Exim4 documentation (text) and common files                                |
| <a href="#">exim4-doc-html</a>     | I:0.98       | 3798 | Exim4 documentation (html)   |
| <a href="#">exim4-doc-info</a>     | I:0.55       | 648  | Exim4 documentation (info)   |
| <a href="#">postfix</a>            | V:107, I:112 | 4224 | Postfix mail transport agent (MTA: secure alternative)                     |
| <a href="#">postfix-doc</a>        | I:4.6        | 5022 | Postfix documentation (html+text)  |
| <a href="#">sas12-bin</a>          | V:5, I:10    | 381  | Cyrus SASL API implementation (supplement postfix for SMTP AUTH)           |
| <a href="#">cyrus-sas12-doc</a>    | I:0.67       | 2140 | Cyrus SASL - documentation   |
| <a href="#">msmtp</a>              | V:8, I:14    | 811  | Light weight MTA   |
| <a href="#">msmtp-mta</a>          | V:6.6, I:8.4 | 136  | Light weight MTA (sendmail compatibility extension to <code>msmtp</code> ) |
| <a href="#">nullmailer</a>         | V:7.9, I:8.4 | 483  | Strip down MTA, no local mail  |
| <a href="#">ssmtp</a>              | V:4.2, I:6.3 | 134  | Strip down MTA, no local mail  |
| <a href="#">sendmail-bin</a>       | V:11, I:11   | 1954 | Full featured MTA (only if you are already familiar)                       |
| <a href="#">git-email</a>          | V:0.4, I:9.8 | 1204 | <code>git-send-email(1)</code> program for sending series of patch emails  |

Table 6.3: List of basic mail transport agent related packages

### 6.2.4.1 The configuration of `exim4`

For the Internet mail via smarthost, you (re)configure `exim4 - *` packages as the following.

```
$ sudo systemctl stop exim4
$ sudo dpkg-reconfigure exim4-config
```

Select "mail sent by smarthost; received via SMTP or fetchmail" for "General type of mail configuration".

Set "System mail name:" to its default as the FQDN (see Section 5.1.1).

Set "IP-addresses to listen on for incoming SMTP connections:" to its default as "127.0.0.1 ; ::1".

Unset contents of "Other destinations for which mail is accepted:".

Unset contents of "Machines to relay mail for:".

Set "IP address or host name of the outgoing smarthost:" to "smtp.hostname.dom:587".

Select "No" for "Hide local mail name in outgoing mail?". (Use "/etc/email-addresses" as in Section 6.2.4.3, instead.)

Reply to "Keep number of DNS-queries minimal (Dial-on-Demand)?" as one of the following.

- "No" if the system is connected to the Internet while booting.
- "Yes" if the system is **not** connected to the Internet while booting.

Set "Delivery method for local mail:" to "mbox format in /var/mail/".

Select "Yes" for "Split configuration into small files?:".

Create password entries for the smarthost by editing "/etc/exim4/passwd.client".

```
$ sudo vim /etc/exim4/passwd.client
...
$ cat /etc/exim4/passwd.client
^smtp.*\.hostname\.dom:username@hostname.dom:password
```

Configure exim4(8) with "QUEUERUNNER='queueonly'", "QUEUERUNNER='nodaemon'", etc. in "/etc/default/exim4" to minimize system resource usages. (optional)

Start exim4 by the following.

```
$ sudo systemctl start exim4
```

The host name in "/etc/exim4/passwd.client" should not be the alias. You check the real host name with the following.

```
$ host smtp.hostname.dom
smtp.hostname.dom is an alias for smtp99.hostname.dom.
smtp99.hostname.dom has address 123.234.123.89
```

I use regex in "/etc/exim4/passwd.client" to work around the alias issue. SMTP AUTH probably works even if the ISP moves host pointed by the alias.

You can manually update exim4 configuration by the following:

- Update exim4 configuration files in "/etc/exim4/".
  - creating "/etc/exim4/exim4.conf.localmacros" to set MACROs and editing "/etc/exim4/exim4.conf.template" (non-split configuration)
  - creating new files or editing existing files in the "/etc/exim4/exim4.conf.d" subdirectories. (split configuration)
- Run "systemctl reload exim4".



**Caution**

Starting `exim4` takes long time if "No" (default value) was chosen for the debconf query of "Keep number of DNS-queries minimal (Dial-on-Demand)?" and the system is **not** connected to the Internet while booting.

Please read the official guide at: `/usr/share/doc/exim4-base/README.Debian.gz` and `update-exim4.conf(8)`.

**Warning**

For all practical consideration, use [SMTP](#) with [STARTTLS](#) on port 587 or [SMTPS](#) (SMTP over SSL) on port 465, instead of plain SMTP on port 25.

### 6.2.4.2 The configuration of postfix with SASL

For the Internet mail via smarthost, you should first read [postfix documentation](#) and key manual pages.

| command                   | function                           |
|---------------------------|------------------------------------|
| <code>postfix(1)</code>   | Postfix control program            |
| <code>postconf(1)</code>  | Postfix configuration utility      |
| <code>postconf(5)</code>  | Postfix configuration parameters   |
| <code>postmap(1)</code>   | Postfix lookup table maintenance   |
| <code>postalias(1)</code> | Postfix alias database maintenance |

Table 6.4: List of important postfix manual pages

You (re)configure `postfix` and `sasl2-bin` packages as follows.

```
$ sudo systemctl stop postfix
$ sudo dpkg-reconfigure postfix
```

Chose "Internet with smarthost".

Set "SMTP relay host (blank for none):" to `[smtp.hostname.dom]:587` and configure it by the following.

```
$ sudo postconf -e 'smtp_sender_dependent_authentication = yes'
$ sudo postconf -e 'smtp_sasl_auth_enable = yes'
$ sudo postconf -e 'smtp_sasl_password_maps = hash:/etc/postfix/sasl_passwd'
$ sudo postconf -e 'smtp_sasl_type = cyrus'
$ sudo vim /etc/postfix/sasl_passwd
```

Create password entries for the smarthost.

```
$ cat /etc/postfix/sasl_passwd
[smtp.hostname.dom]:587      username:password
$ sudo postmap hash:/etc/postfix/sasl_passwd
```

Start the `postfix` by the following.

```
$ sudo systemctl start postfix
```

Here the use of "[" and "]" in the `dpkg-reconfigure` dialog and `/etc/postfix/sasl_passwd` ensures not to check MX record but directly use exact hostname specified. See "Enabling SASL authentication in the Postfix SMTP client" in `/usr/share/doc/postfix/html/SASL_README.html`.

| file                 | function                              | application  |
|----------------------|---------------------------------------|--|
| /etc/mailname        | default host name for (outgoing) mail | Debian specific, mailname(5)                                       |
| /etc/email-addresses | host name spoofing for outgoing mail  | exim(8) specific, exim4-config_files(5)                            |
| /etc/postfix/generic | host name spoofing for outgoing mail  | postfix(1) specific, activated after postmap(1) command execution. |
| /etc/aliases         | account name alias for incoming mail  | general, activated after newaliases(1) command execution.          |

Table 6.5: List of mail address related configuration files

### 6.2.4.3 The mail address configuration

There are a few [mail address configuration files for mail transport, delivery and user agents](#).

The **mailname** in the "/etc/mailname" file is usually a fully qualified domain name (FQDN) that resolves to one of the host's IP addresses. For the mobile workstation which does not have a hostname with resolvable IP address, set this **mailname** to the value of "hostname -f". (This is safe choice and works for both exim4-\* and postfix.)

#### Tip

The contents of "/etc/mailname" is used by many non-MTA programs for their default behavior. For mutt, set "hostname" and "from" variables in ~/.muttrc file to override the **mailname** value. For programs in the devscripts package, such as bts(1) and dch(1), export environment variables "\$DEBFULLNAME" and "\$DEBEMAIL" to override it.

#### Tip

The popularity-contest package normally send mail from root account with FQDN. You need to set MAILFROM in /etc/popularity-contest.conf as described in the /usr/share/popularity-contest/default.conf file. Otherwise, your mail will be rejected by the smarthost SMTP server. Although this is tedious, this approach is safer than rewriting the source address for all mails from root by MTA and should be used for other daemons and cron scripts.

When setting the **mailname** to "hostname -f", the spoofing of the source mail address via MTA can be realized by the following.

- "/etc/email-addresses" file for exim4(8) as explained in the exim4-config\_files(5)
- "/etc/postfix/generic" file for postfix(1) as explained in the generic(5)

For postfix, the following extra steps are needed.

```
# postmap hash:/etc/postfix/generic
# postconf -e 'smtp_generic_maps = hash:/etc/postfix/generic'
# postfix reload
```

You can test mail address configuration using the following.

- exim(8) with -brw, -bf, -bF, -bV, ... options
- postmap(1) with -q option.

#### Tip

Exim comes with several utility programs such as exiqgrep(8) and exipick(8). See "dpkg -L exim4-base|grep man8/" for available commands.

#### 6.2.4.4 Basic MTA operations

There are several basic MTA operations. Some may be performed via `sendmail(1)` compatibility interface.

| exim command                     | postfix command                                      | description   |
|----------------------------------|--|---|
| <code>sendmail</code>            | <code>sendmail</code>                                | read mails from standard input and arrange for delivery (-bm) |
| <code>mailq</code>               | <code>mailq</code>                                   | list the mail queue with status and queue ID (-bp)            |
| <code>newaliases</code>          | <code>newaliases</code>                              | initialize alias database (-I)                                |
| <code>exim4 -q</code>            | <code>postqueue -f</code>                            | flush waiting mails (-q)                                      |
| <code>exim4 -qf</code>           | <code>postsuper -r ALL deferred; postqueue -f</code> | flush all mails   |
| <code>exim4 -qff</code>          | <code>postsuper -r ALL; postqueue -f</code>          | flush even frozen mails                                       |
| <code>exim4 -Mg queue_id</code>  | <code>postsuper -h queue_id</code>                   | freeze one message by its queue ID                            |
| <code>exim4 -Mrm queue_id</code> | <code>postsuper -d queue_id</code>                   | remove one message by its queue ID                            |
| N/A                              | <code>postsuper -d ALL</code>                        | remove all messages   |

Table 6.6: List of basic MTA operation

#### Tip

It may be a good idea to flush all mails by a script in `"/etc/ppp/ip-up.d/*"`.

## 6.3 The remote access server and utilities (SSH)

The [Secure SHell](#) (SSH) is the **secure** way to connect over the Internet. A free version of SSH called [OpenSSH](#) is available as `openssh-client` and `openssh-server` packages in Debian.

For the user, `ssh(1)` functions as a smarter and more secure `telnet(1)`. Unlike `telnet` command, `ssh` command does not stop on the `telnet` escape character (initial default CTRL-`J`).

| package                                | popcon        | size | tool                                   | description   |
|--|---------------|------|--|---|
| <a href="#">openssh-client</a>         | V:914, I:996  | 4210 | <code>ssh(1)</code>                    | Secure shell client   |
| <a href="#">openssh-server</a>         | V:768, I:819  | 3359 | <code>sshd(8)</code>                   | Secure shell server   |
| <a href="#">ssh-askpass</a>            | I:16          | 103  | <code>ssh-askpass(1)</code>            | asks user for a pass phrase for <code>ssh-add</code> (plain X)                    |
| <a href="#">ssh-askpass-gnome</a>      | V:0.4, I:3.0  | 207  | <code>ssh-askpass-gnome(1)</code>      | asks user for a pass phrase for <code>ssh-add</code> (GNOME)                      |
| <a href="#">ssh-askpass-fullscreen</a> | V:0.4, I:0.46 | 41   | <code>ssh-askpass-fullscreen(1)</code> | asks user for a pass phrase for <code>ssh-add</code> (GNOME) with extra eye candy |
| <a href="#">shellinabox</a>            | V:0.7, I:1.1  | 528  | <code>shellinaboxd(1)</code>           | web server for <a href="#">browser accessible VT100 terminal emulator</a>         |

Table 6.7: List of remote access server and utilities

Although `shellinabox` is not a SSH program, it is listed here as an interesting alternative for the remote terminal access.

See also [Section 7.9](#) for connecting to remote X client programs.

**Caution**

See Section 4.6.3 if your SSH is accessible from the Internet.

**Tip**

Please use the `screen(1)` program to enable remote shell process to survive the interrupted connection (see Section 9.1.2).

### 6.3.1 Basics of SSH

The OpenSSH SSH daemon supports SSH protocol 2 only.

Please read `"/usr/share/doc/openssh-client/README.Debian.gz"`, `ssh(1)`, `sshd(8)`, `ssh-keygen(1)`, `ssh-add(1)` and `ssh-agent(1)`.

**Warning**

`"/etc/ssh/sshd_not_to_be_run"` must not be present if one wishes to run the OpenSSH server. Don't enable rhost based authentication (`HostbasedAuthentication` in `/etc/ssh/sshd_config`).

| configuration file                   | description of configuration file   |
|--------------------------------------|---|
| <code>/etc/ssh/ssh_config</code>     | SSH client defaults, see <code>ssh_config(5)</code>   |
| <code>/etc/ssh/sshd_config</code>    | SSH server defaults, see <code>sshd_config(5)</code>  |
| <code>~/.ssh/authorized_keys</code>  | default public SSH keys that clients use to connect to this account on this SSH server                    |
| <code>~/.ssh/id_rsa</code>           | secret SSH-2 RSA key of the user  |
| <code>~/.ssh/id_key-type-name</code> | secret SSH-2 <i>key-type-name</i> key such as <code>ecdsa</code> , <code>ed25519</code> , ... of the user |

Table 6.8: List of SSH configuration files

The following starts an `ssh(1)` connection from a client.

| command  | description   |
|--|---|
| <code>ssh username@hostname.domain.ext</code>                                      | connect with default mode   |
| <code>ssh -v username@hostname.domain.ext</code>                                   | connect with default mode with debugging messages                   |
| <code>ssh -o PreferredAuthentications=password username@hostname.domain.ext</code> | force to use password with SSH version 2                            |
| <code>ssh -t username@hostname.domain.ext passwd</code>                            | run <code>passwd</code> program to update password on a remote host |

Table 6.9: List of SSH client startup examples

### 6.3.2 User name on the remote host

If you use the same user name on the local and the remote host, you can eliminate typing "username@".

Even if you use different user name on the local and the remote host, you can eliminate it using "~/.ssh/config". For [Debian Salsa service](#) with account name "foo-guest", you set "~/.ssh/config" to contain the following.

```
Host salsa.debian.org people.debian.org
User foo-guest
```

### 6.3.3 Connecting without remote passwords

One can avoid having to remember passwords for remote systems by using "PubkeyAuthentication" (SSH-2 protocol).

On the remote system, set the respective entries, "PubkeyAuthentication yes", in "/etc/ssh/sshd\_config". Generate authentication keys locally and install the public key on the remote system by the following.

```
$ ssh-keygen -t rsa
$ cat .ssh/id_rsa.pub | ssh user1@remote "cat - >>.ssh/authorized_keys"
```

You can add options to the entries in "~/.ssh/authorized\_keys" to limit hosts and to run specific commands. See sshd(8) "AUTHORIZED\_KEYS FILE FORMAT".

### 6.3.4 Dealing with alien SSH clients

There are some free [SSH](#) clients available for other platforms.

| environment      | free SSH program  |
|------------------|---|
| Windows          | puTTY ( <a href="#">PuTTY: a free SSH and Telnet client</a> ) (GPL)                 |
| Windows (cygwin) | SSH in cygwin ( <a href="#">Cygwin: Get that Linux feeling - on Windows</a> ) (GPL) |
| Mac OS X         | OpenSSH; use ssh in the Terminal application (GPL)                                  |

Table 6.10: List of free SSH clients for other platforms

### 6.3.5 Setting up ssh-agent

It is safer to protect your SSH authentication secret keys with a pass phrase. If a pass phrase was not set, use "ssh-keygen -p" to set it.

Place your public SSH key (e.g. "~/.ssh/id\_rsa.pub") into "~/.ssh/authorized\_keys" on a remote host using a password-based connection to the remote host as described above.

```
$ ssh-agent bash
$ ssh-add ~/.ssh/id_rsa
Enter passphrase for /home/username/.ssh/id_rsa:
Identity added: /home/username/.ssh/id_rsa (/home/username/.ssh/id_rsa)
```

No remote password needed from here on for the next command.

```
$ scp foo username@remote.host:foo
```

Press ^D to terminating ssh-agent session.

For the X server, the normal Debian startup script executes ssh-agent as the parent process. So you only need to execute ssh-add once. For more, read ssh-agent(1) and ssh-add(1).

### 6.3.6 Sending a mail from a remote host

If you have an SSH shell account on a server with proper DNS settings, you can send a mail generated on your workstation as an email genuinely sent from the remote server.

```
$ ssh username@example.org /usr/sbin/sendmail -bm -ti -f "username@example.org" < mail_data ↵  
.txt
```

### 6.3.7 Port forwarding for SMTP/POP3 tunneling

To establish a pipe to connect to port 25 of remote-server from port 4025 of localhost, and to port 110 of remote-server from port 4110 of localhost through ssh, execute on the local host as the following.

```
# ssh -q -L 4025:remote-server:25 4110:remote-server:110 username@remote-server
```

This is a secure way to make connections to SMTP/POP3 servers over the Internet. Set the "AllowTcpForwarding" entry to "yes" in "/etc/ssh/sshd\_config" of the remote host.

### 6.3.8 How to shutdown the remote system on SSH

You need to protect the process doing "shutdown -h now" (see Section 1.1.8) from the termination of SSH using the at(1) command (see Section 9.4.13) by the following.

```
# echo "shutdown -h now" | at now
```

Running "shutdown -h now" in screen(1) (see Section 9.1.2) session is another way to do the same.

### 6.3.9 Troubleshooting SSH

If you have problems, check the permissions of configuration files and run ssh with the "-v" option.

Use the "-p" option if you are root and have trouble with a firewall; this avoids the use of server ports 1 — 1023.

If ssh connections to a remote site suddenly stop working, it may be the result of tinkering by the sysadmin, most likely a change in "host\_key" during system maintenance. After making sure this is the case and nobody is trying to fake the remote host by some clever hack, one can regain a connection by removing the "host\_key" entry from "~/.ssh/known\_hosts" on the local host.

## 6.4 The print server and utilities

In the old Unix-like system, the BSD [Line printer daemon \(lpd\)](#) was the standard and the standard print out format of the classic free software was [PostScript \(PS\)](#). Some filter system was used along with [Ghostscript](#) to enable printing to the non-PostScript printer. See Section 11.4.1.

In the modern Debian system, the [Common UNIX Printing System \(CUPS\)](#) is the de facto standard and the standard print out format of the modern free software is [Portable Document Format \(PDF\)](#).

The CUPS uses [Internet Printing Protocol \(IPP\)](#). The IPP is the cross-platform de facto standard for remote printing with bi-directional communication capability.

Thanks to the file format dependent auto-conversion feature of the CUPS system, simply feeding any data to the `lpr` command should generate the expected print output. (In CUPS, `lpr` can be enabled by installing the `cups-bsd` package.)

The Debian system has some notable packages for the print servers and utilities.

---

| package                                   | popcon                       | size | port           | description  |
|---|------------------------------|------|----------------|--|
| <a href="#">lpr</a>                       | <a href="#">V:2.1, I:2.4</a> | 378  | printer (515)  | BSD lpr/lpd ( <a href="#">Line printer daemon</a> )  |
| <a href="#">cups</a>                      | <a href="#">V:98, I:446</a>  | 1088 | IPP (631)      | Internet Printing CUPS server  |
| <a href="#">cups-client</a>               | <a href="#">V:118, I:459</a> | 429  | , ,            | <a href="#">System V printer commands</a> for CUPS: lp(1), lpstat(1), lpoptions(1), cancel(1), lpmove(8), lpinfo(8), lpadmin(8), ... |
| <a href="#">cups-bsd</a>                  | <a href="#">V:34, I:186</a>  | 131  | , ,            | <a href="#">BSD printer commands</a> for CUPS: lpr(1), lpq(1), lprm(1), lpc(8)   |
| <a href="#">printer-driver-gutenprint</a> | <a href="#">V:11, I:56</a>   | 1117 | Not applicable | printer drivers for CUPS   |

Table 6.11: List of print servers and utilities

**Tip**

You can configure CUPS system by pointing your web browser to "<http://localhost:631/>".

## 6.5 Other network application servers

Here are other network application servers.

| package                           | popcon                         | size | protocol               | description                                    |
|-----------------------------------|--------------------------------|------|------------------------|--|
| <a href="#">telnetd</a>           | <a href="#">V:0.3, I:1.6</a>   | 55   | <a href="#">TELNET</a> | TELNET server                                  |
| <a href="#">nfs-kernel-server</a> | <a href="#">V:47, I:55</a>     | 830  | <a href="#">NFS</a>    | Unix file sharing                              |
| <a href="#">samba</a>             | <a href="#">V:109, I:123</a>   | 5053 | <a href="#">SMB</a>    | Windows file and printer sharing               |
| <a href="#">netatalk</a>          | <a href="#">V:0.74, I:0.97</a> | 933  | <a href="#">ATP</a>    | Apple/Mac file and printer sharing (AppleTalk) |
| <a href="#">proftpd-basic</a>     | <a href="#">V:3.9, I:9.2</a>   | 452  | <a href="#">FTP</a>    | General file download                          |
| <a href="#">apache2</a>           | <a href="#">V:178, I:219</a>   | 586  | <a href="#">HTTP</a>   | General web server                             |
| <a href="#">squid</a>             | <a href="#">V:9.4, I:9.9</a>   | 9337 | , ,                    | General web <a href="#">proxy server</a>       |
| <a href="#">bind9</a>             | <a href="#">V:35, I:37</a>     | 884  | <a href="#">DNS</a>    | IP address for other hosts                     |
| <a href="#">kea</a>               | <a href="#">I:0.57</a>         | 244  | <a href="#">DHCP</a>   | IP address of client itself                    |

Table 6.12: List of other network application servers

Common Internet File System Protocol (CIFS) is the same protocol as [Server Message Block \(SMB\)](#) and is used widely by Microsoft Windows.

**Tip**

See Section [4.5.2](#) for integration of server systems.

**Tip**

The hostname resolution is usually provided by the [DNS](#) server. For the host IP address dynamically assigned by [DHCP](#), [Dynamic DNS](#) can be set up for the hostname resolution using bind9 and kea as described in the [DDNS](#) page on the Debian wiki.

**Tip**

Use of proxy server such as `squid` is much more efficient for saving bandwidth than use of local mirror server with the full Debian archive contents.

## 6.6 Other network application clients

Here are other network application clients.

| package                            | popcon       | size  | protocol     | description  |
|------------------------------------|--------------|-------|--------------|--|
| <a href="#">netcat-traditional</a> | V:50, I:904  | 139   | TCP/IP       | TCP/IP swiss army knife  |
| <a href="#">netcat-openbsd</a>     | V:22, I:120  | 105   | TCP/IP       | TCP/IP swiss army knife with support for IPv6, proxies, and Unix sockets |
| <a href="#">openssl</a>            | V:847, I:996 | 2532  | SSL          | Secure Socket Layer (SSL) binary and related cryptographic tools         |
| <a href="#">stunnel4</a>           | V:6.2, I:9.3 | 24    | , ,          | universal SSL Wrapper  |
| <a href="#">telnet</a>             | V:11, I:215  | 55    | TELNET       | TELNET client  |
| <a href="#">nfs-common</a>         | V:150, I:198 | 1139  | NFS          | Unix file sharing  |
| <a href="#">smbclient</a>          | V:25, I:206  | 2088  | SMB          | MS Windows file and printer sharing client                               |
| <a href="#">cifs-utils</a>         | V:33, I:119  | 351   | , ,          | mount and umount commands for remote MS Windows file                     |
| <a href="#">wget</a>               | V:185, I:982 | 3784  | HTTP and FTP | web downloader   |
| <a href="#">curl</a>               | V:243, I:716 | 512   | , ,          | , ,  |
| <a href="#">transmission-gtk</a>   | V:11, I:156  | 6259  | BitTorrent   | <a href="#">BitTorrent</a> client (GTK)                                  |
| <a href="#">transmission-qt</a>    | V:0.6, I:2.5 | 6213  | , ,          | <a href="#">BitTorrent</a> client (Qt)                                   |
| <a href="#">ktorrent</a>           | V:1.4, I:5.1 | 5031  | , ,          | <a href="#">BitTorrent</a> client (Qt)                                   |
| <a href="#">qbittorrent</a>        | V:8, I:22    | 15261 | , ,          | <a href="#">BitTorrent</a> client (Qt)                                   |
| <a href="#">bind9-host</a>         | V:127, I:940 | 136   | DNS          | host(1) from bind9, "Priority: standard"                                 |
| <a href="#">dnsutils</a>           | V:5, I:161   | 23    | , ,          | dig(1) from bind, "Priority: standard"                                   |
| <a href="#">ldap-utils</a>         | V:10, I:58   | 782   | LDAP         | obtain data from LDAP server   |

Table 6.13: List of network application clients

## 6.7 The diagnosis of the system daemons

The `telnet` program enables manual connection to the system daemons and its diagnosis.

For testing plain [POP3](#) service, try the following

```
$ telnet mail.ispname.net pop3
```

For testing the [TLS/SSL](#) enabled [POP3](#) service by some ISPs, you need TLS/SSL enabled `telnet` client by the `telnet-ssl` or `openssl` packages.

```
$ telnet -z ssl pop.gmail.com 995
```



```
$ openssl s_client -connect pop.gmail.com:995
```

The following [RFCs](#) provide required knowledge to each system daemon.

| <b>RFC</b>  | <b>description</b>   |
|---|--|
| <a href="#">rfc1939</a> and <a href="#">rfc2449</a> | <a href="#">POP3</a> service                                 |
| <a href="#">rfc3501</a>                             | <a href="#">IMAP4</a> service                                |
| <a href="#">rfc2821</a> ( <a href="#">rfc821</a> )  | <a href="#">SMTP</a> service                                 |
| <a href="#">rfc2822</a> ( <a href="#">rfc822</a> )  | Mail file format   |
| <a href="#">rfc2045</a>                             | <a href="#">Multipurpose Internet Mail Extensions (MIME)</a> |
| <a href="#">rfc819</a>                              | <a href="#">DNS</a> service                                  |
| <a href="#">rfc2616</a>                             | <a href="#">HTTP</a> service                                 |
| <a href="#">rfc2396</a>                             | <a href="#">URI</a> definition                               |

Table 6.14: List of popular RFCs

The port usage is described in `"/etc/services"`.

## Chapter 7

# GUI System

### 7.1 GUI desktop environment

There are several choices for the full featured [GUI](#) desktop environment on the Debian system.

| task package                                 | popcon                | size | description   |
|--|-----------------------|------|---|
| <a href="#">task-gnome-desktop</a>           | <a href="#">1:190</a> | 9    | <a href="#">GNOME</a> desktop environment           |
| <a href="#">task-xfce-desktop</a>            | <a href="#">1:89</a>  | 9    | <a href="#">Xfce</a> desktop environment            |
| <a href="#">task-kde-desktop</a>             | <a href="#">1:93</a>  | 6    | <a href="#">KDE Plasma</a> desktop environment      |
| <a href="#">task-mate-desktop</a>            | <a href="#">1:32</a>  | 9    | <a href="#">MATE</a> desktop environment            |
| <a href="#">task-cinnamon-desktop</a>        | <a href="#">1:37</a>  | 9    | <a href="#">Cinnamon</a> desktop environment        |
| <a href="#">task-lxde-desktop</a>            | <a href="#">1:20</a>  | 9    | <a href="#">LXDE</a> desktop environment            |
| <a href="#">task-lxqt-desktop</a>            | <a href="#">1:16</a>  | 9    | <a href="#">LXQt</a> desktop environment            |
| <a href="#">task-gnome-flashback-desktop</a> | <a href="#">1:9.9</a> | 6    | <a href="#">GNOME Flashback</a> desktop environment |

Table 7.1: List of desktop environment

---

**Tip**

Dependency packages selected by a task metapackage may be out of sync with the latest package transition state under the Debian unstable/testing environment. For `task-gnome-desktop`, you may need to adjust package selections as follows:

- Start `aptitude(8)` as `sudo aptitude -u`.
  - Move cursor to "Tasks" and press "Enter".
  - Move cursor to "End-user" press "Enter".
  - Move cursor to "GNOME" press "Enter".
  - Move cursor to `task-gnome-desktop` and press "Enter".
  - Move cursor to "Depends" and press "m" (manually selected).
  - Move cursor to "Recommends" and press "m" (manually selected).
  - Move cursor to `task-gnome-desktop` and press "-". (drop)
  - Adjust selected packages while dropping problematic ones causing package conflicts.
  - Press "g" to start install.
- 

This chapter will focus mostly on the default desktop environment of Debian: `task-gnome-desktop` offering [GNOME](#) on [wayland](#).

## 7.2 GUI communication protocol

GUI communication protocol used on the GNOME desktop can be:

- [Wayland \(display server protocol\)](#) (native)
- [X Window System core protocol](#) (via `xwayland`)

Please check [freedesktop.org](https://freedesktop.org) site for how [Wayland architecture is different from X Window architecture](#).

From user's perspective, differences can be colloquially summarized as:

- Wayland is a same-host GUI communication protocol: new, simpler, faster, no `setuid` root binary
- X Window is a network-capable GUI communication protocol: traditional, complex, slower, `setuid` root binary

For applications using Wayland protocol, the access to their display contents from a remote host is supported by the [VNC](#) or [RDP](#). See Section [7.8](#)

Modern X servers have [the MIT Shared Memory Extension](#) and communicate with their local X clients using the local shared memory. This bypasses the network transparent [Xlib](#) interprocess communication channel and gains performance. This situation was the [background](#) of creating Wayland as a local-only GUI communication protocol.

Using the `xeyes` program started from the GNOME terminal, you can check GUI communication protocol used by each GUI application.

```
$ xeyes
```

- If the mouse cursor is on an application such as "GNOME terminal" which uses Wayland display server protocol, eyes don't move with the mouse cursor.
-

- If the mouse cursor is on an application such as "xterm" which uses X Window System core protocol, eyes move with the mouse cursor exposing not-so-isolated nature of X Window architecture.

As of April 2021, many popular GUI applications such as GNOME and [LibreOffice \(LO\)](#) applications have been migrated to the Wayland display server protocol. I see xterm, gitk, chromium, firefox, gimp, dia, and KDE applications still use X Window System core protocol.

---

#### Note

For both the xwayland on Wayland or the native X Window System, the old X server configuration file `/etc/X11/xorg.conf` shouldn't exist on the system. The graphics and input devices are now configured by the kernel with [DRM](#), [KMS](#), and [udev](#). The native X server has been rewritten to use them. See "[modeb default video mode support](#)" in the Linux kernel documentation.

---

## 7.3 GUI infrastructure

Here are notable GUI infrastructure packages for the GNOME on Wayland environment.

| package                                     | popcon       | package size | description   |
|---|--------------|--------------|---|
| <a href="#">mutter</a>                      | V:1, I:24    | 215          | GNOME's <a href="#">mutter</a> window manager <b>[auto]</b>         |
| <a href="#">xwayland</a>                    | V:252, I:332 | 2540         | An X server running on top of <a href="#">wayland</a> <b>[auto]</b> |
| <a href="#">gnome-remote-desktop</a>        | V:135, I:239 | 2444         | Remote desktop daemon for GNOME using PipeWire <b>[auto]</b>        |
| <a href="#">gnome-tweaks</a>                | V:16, I:231  | 1145         | Advanced configuration settings for GNOME                           |
| <a href="#">gnome-shell-extension-prefs</a> | V:7, I:127   | 72           | Tool to enable / disable GNOME Shell extensions                     |

Table 7.2: List of notable GUI infrastructure packages

Here, "**[auto]**" means that these packages are automatically installed when `task-gnome-desktop` is installed.

---

#### Tip

`gnome-tweaks` is the indispensable configuration utility. For example:

- You can force "Over-Amplification" of sound volume from "General".
  - You can force "Caps" to become "Esc" from "Keyboard & Mouse" -> "Keyboard" -> "Additional Layout Option".
- 

---

#### Tip

Detail features of GNOME desktop environment can be configured with utilities started by typing "settings", "tweaks", or "extensions" after pressing Super-key.

---

## 7.4 GUI applications

Many useful GUI applications are available on Debian now. Installing software packages such as `scribus` (KDE) on GNOME desktop environment are quite acceptable since corresponding functionality is not available under GNOME desktop environment. But installing too many packages with duplicated functionalities may clutter your system.

Here is a list of GUI applications which caught my eyes.

---

| package                             | popcon                         | package size           | type       | description   |
|-------------------------------------|--------------------------------|------------------------|------------|---|
| <a href="#">evolution</a>           | <a href="#">V:26, I:228</a>    | <a href="#">488</a>    | GNOME      | Personal information Management (groupware and email)                       |
| <a href="#">thunderbird</a>         | <a href="#">V:42, I:105</a>    | <a href="#">274189</a> | GTK        | Email client ( <a href="#">Mozilla Thunderbird</a> )                        |
| <a href="#">kontakt</a>             | <a href="#">V:1, I:11</a>      | <a href="#">2305</a>   | KDE        | Personal information Management (groupware and email)                       |
| <a href="#">libreoffice-writer</a>  | <a href="#">V:99, I:423</a>    | <a href="#">33285</a>  | LO         | word processor  |
| <a href="#">abiword</a>             | <a href="#">V:0.9, I:4.9</a>   | <a href="#">3596</a>   | GNOME      | word processor  |
| <a href="#">calligrawords</a>       | <a href="#">V:0.3, I:3.1</a>   | <a href="#">6932</a>   | KDE        | word processor  |
| <a href="#">scribus</a>             | <a href="#">V:1, I:13</a>      | <a href="#">32423</a>  | KDE        | <a href="#">desktop publishing</a> editor to edit <a href="#">PDF</a> files |
| <a href="#">glabels</a>             | <a href="#">V:0.3, I:2.7</a>   | <a href="#">1283</a>   | GNOME      | label editor  |
| <a href="#">libreoffice-calc</a>    | <a href="#">V:95, I:420</a>    | <a href="#">28299</a>  | LO         | spreadsheet   |
| <a href="#">gnumeric</a>            | <a href="#">V:3, I:11</a>      | <a href="#">9958</a>   | GNOME      | spreadsheet   |
| <a href="#">calligrasheets</a>      | <a href="#">V:0.2, I:2.0</a>   | <a href="#">13593</a>  | KDE        | spreadsheet   |
| <a href="#">libreoffice-impress</a> | <a href="#">V:82, I:418</a>    | <a href="#">2443</a>   | LO         | presentation  |
| <a href="#">calligrastage</a>       | <a href="#">V:0.1, I:1.9</a>   | <a href="#">6011</a>   | KDE        | presentation  |
| <a href="#">libreoffice-base</a>    | <a href="#">V:20, I:72</a>     | <a href="#">4984</a>   | LO         | database management   |
| <a href="#">kexi</a>                | <a href="#">V:0.05, I:0.78</a> | <a href="#">7565</a>   | KDE        | database management   |
| <a href="#">libreoffice-draw</a>    | <a href="#">V:83, I:418</a>    | <a href="#">10995</a>  | LO         | vector graphics editor (draw)   |
| <a href="#">inkscape</a>            | <a href="#">V:12, I:79</a>     | <a href="#">112538</a> | GNOME      | vector graphics editor (draw)   |
| <a href="#">karbon</a>              | <a href="#">V:0.2, I:2.4</a>   | <a href="#">3958</a>   | KDE        | vector graphics editor (draw)   |
| <a href="#">dia</a>                 | <a href="#">V:1, I:17</a>      | <a href="#">3802</a>   | GTK        | flowchart and diagram editor  |
| <a href="#">gimp</a>                | <a href="#">V:44, I:217</a>    | <a href="#">32791</a>  | GTK        | bitmap graphics editor (paint)  |
| <a href="#">shotwell</a>            | <a href="#">V:14, I:246</a>    | <a href="#">6334</a>   | GTK        | digital photo organizer   |
| <a href="#">digikam</a>             | <a href="#">V:1.5, I:8.4</a>   | <a href="#">324</a>    | KDE        | digital photo organizer   |
| <a href="#">darktable</a>           | <a href="#">V:4, I:11</a>      | <a href="#">35876</a>  | GTK        | lighttable and darkroom for photographers                                   |
| <a href="#">planner</a>             | <a href="#">V:0.2, I:4.4</a>   | <a href="#">1400</a>   | GNOME      | project management  |
| <a href="#">calligraplan</a>        | <a href="#">V:0.2, I:3.0</a>   | <a href="#">23545</a>  | KDE        | project management  |
| <a href="#">gnucash</a>             | <a href="#">V:2.2, I:7.0</a>   | <a href="#">29455</a>  | GNOME      | personal accounting   |
| <a href="#">homebank</a>            | <a href="#">V:0.3, I:1.6</a>   | <a href="#">3194</a>   | GTK        | personal accounting   |
| <a href="#">lilypond</a>            | <a href="#">V:0.7, I:5.5</a>   | <a href="#">16924</a>  | -          | music typesetter  |
| <a href="#">kmy money</a>           | <a href="#">V:0.5, I:1.9</a>   | <a href="#">18945</a>  | KDE        | personal accounting   |
| <a href="#">librecad</a>            | <a href="#">V:1, I:14</a>      | <a href="#">9164</a>   | Qt-app     | computer-aided design (CAD) system (2D)                                     |
| <a href="#">freecad</a>             | <a href="#">V:1, I:21</a>      | <a href="#">112</a>    | Qt-app     | computer-aided design (CAD) system (3D)                                     |
| <a href="#">kicad</a>               | <a href="#">V:3, I:15</a>      | <a href="#">212240</a> | GTK        | electronic schematic and PCB design software                                |
| <a href="#">xsane</a>               | <a href="#">V:9, I:129</a>     | <a href="#">1512</a>   | GTK        | scanner frontend  |
| <a href="#">libreoffice-math</a>    | <a href="#">V:77, I:421</a>    | <a href="#">1912</a>   | LO         | mathematical equation/formula editor  |
| <a href="#">calibre</a>             | <a href="#">V:7, I:24</a>      | <a href="#">65193</a>  | KDE        | e-book converter and library management                                     |
| <a href="#">fbreader</a>            | <a href="#">V:0.7, I:5.8</a>   | <a href="#">3827</a>   | GTK        | e-book reader   |
| <a href="#">evince</a>              | <a href="#">V:72, I:286</a>    | <a href="#">942</a>    | GNOME      | document(pdf) viewer  |
| <a href="#">okular</a>              | <a href="#">V:33, I:131</a>    | <a href="#">4419</a>   | KDE        | document(pdf) viewer  |
| <a href="#">x11-apps</a>            | <a href="#">V:30, I:446</a>    | <a href="#">2461</a>   | pure X-app | xeyes(1), etc.  |
| <a href="#">x11-utils</a>           | <a href="#">V:226, I:555</a>   | <a href="#">651</a>    | pure X-app | xev(1), xwininfo(1), etc.   |

Table 7.3: List of notable GUI applications

## 7.5 User directories

Default names for user directories such as `~/Desktop`, `~/Documents`, ..., used by the Desktop environment depend on the locale used for the system installation. You can reset them to the English ones by:

```
$ LANGUAGE=C xdg-user-dirs-update --force
```

Then you manually move all the data to the newer directories. See `xdg-user-dirs-update(1)`.

You can also set them to any names by editing `~/.config/user-dirs.dirs`. See `user-dirs.dirs(5)`.

## 7.6 Fonts

Many useful scalable fonts are available for users on Debian. User's concern is how to avoid redundancy and how to configure parts of installed fonts to be disabled. Otherwise, useless font choices may clutter your GUI application menus.

Debian system uses [FreeType 2.0](#) library to rasterise many scalable font formats for screen and print:

- [Type 1 \(PostScript\) fonts](#) which use cubic [Bézier curves](#) (almost obsolete format)
- [TrueType fonts](#) which use quadratic [Bézier curves](#) (good choice format)
- [OpenType fonts](#) which use cubic [Bézier curves](#) (best choice format)

### 7.6.1 Basic fonts

The following table is compiled in the hope to help users to choose appropriate scalable fonts with clear understanding of the metric compatibility and the glyph coverage. Most fonts cover all Latin, Greek, and Cyril characters. The final choice of activated fonts can also be affected by your aesthetics. These fonts can be used for the screen display or for the paper printing.

Here:

- "MCM" stands for "metric compatible with fonts provided by Microsoft"
- "MCMATC" stands for "metric compatible with fonts provided by Microsoft: [Arial](#), [Times New Roman](#), [Courier New](#)"
- "MCAHTC" stands for "metric compatible with fonts provided by [Adobe](#): Helvetica, Times, Courier"
- Numbers in font type columns stands for the rough relative "M" width for the same point size font.
- "P" in mono font type columns stands for its usability for programming having clearly distinguishable "0"/"O" and "1"/"l"/"I".
- The `ttf-mscorefonts-installer` package downloads Microsoft's "[Core fonts for the Web](#)" and installs [Arial](#), [Times New Roman](#), [Courier New](#), [Verdana](#), ... . These installed font data are non-free data.

Many free Latin fonts have their lineage traced to [URW Nimbus](#) family or [Bitstream Vera](#).

---

#### Tip

If your locale needs fonts not covered well by the above fonts, please use `aptitude` to check under task packages listed under "Tasks" -> "Localization". The font packages listed as "Depends:" or "Recommends:" in the localization task packages are the primary candidates.

---

| package                   | popcon       | size  | sans | serif | mono | note on font  |
|---------------------------|--------------|-------|------|-------|------|---|
| fonts-cantarell           | V:176, I:290 | 224   | 59   | -     | -    | <a href="#">Cantarell</a> (GNOME 3, display)  |
| fonts-noto                | I:151        | 30    | 61   | 63    | 40   | <a href="#">Noto fonts</a> (Google, multi-lingual with CJK)   |
| fonts-dejavu              | I:389        | 34    | 58   | 68    | 40   | <a href="#">DejaVu</a> (GNOME 2, MCM: <a href="#">Verdana</a> , extended <a href="#">Bitstream Vera</a> )                   |
| fonts-liberation2         | V:49, I:181  | 15    | 56   | 60    | 40   | <a href="#">Liberation fonts</a> for <a href="#">LibreOffice</a> (Red Hat, MCMATC)  |
| fonts-croscore            | V:20, I:37   | 5260  | 56   | 60    | 40   | <a href="#">Chrome OS: Arimo, Tinos and Cousine</a> (Google, MCMATC)  |
| fonts-crosextra-carlito   | V:20, I:93   | 2696  | 57   | -     | -    | <a href="#">Chrome OS: Carlito</a> (Google, MCM: <a href="#">Calibri</a> )  |
| fonts-crosextra-caladea   | V:12, I:87   | 347   | -    | 55    | -    | <a href="#">Chrome OS: Caladea</a> (Google, MCM: <a href="#">Cambria</a> ) (Latin only )                                    |
| fonts-freefont-ttf        | V:78, I:204  | 14460 | 57   | 59    | 40   | <a href="#">GNU FreeFont</a> (extended <a href="#">URW Nimbus</a> )   |
| fonts-quicksand           | V:207, I:451 | 392   | 56   | -     | -    | Debian task-desktop, <a href="#">Quicksand</a> (display, Latin only)  |
| fonts-hack                | V:33, I:136  | 2507  | -    | -     | 40 P | A typeface designed for source code <a href="#">Hack</a> (Facebook)   |
| fonts-sil-gentiumplus     | I:29         | 14345 | -    | 54    | -    | <a href="#">Gentium SIL</a>   |
| fonts-sil-charis          | V:1, I:28    | 6704  | -    | 59    | -    | <a href="#">Charis SIL</a>  |
| fonts-urw-base35          | V:185, I:531 | 15558 | 56   | 60    | 40   | <a href="#">URW Nimbus</a> ( <a href="#">Nimbus Sans</a> , <a href="#">Roman No. 9 L</a> , <a href="#">Mono L</a> , MCAHTC) |
| fonts-ubuntu              | V:2.1, I:4.9 | 4339  | 58   | -     | 33 P | <a href="#">Ubuntu fonts</a> (display)  |
| fonts-terminus            | V:0.3, I:3.9 | 451   | -    | -     | 33   | <a href="#">Cool retro terminal fonts</a>   |
| ttf-mscorefonts-installer | V:1, I:41    | 85    | 56?  | 60    | 40   | Downloader of Microsoft non-free fonts (see below)  |

Table 7.4: List of notable [TrueType](#) and [OpenType](#) fonts

| package                               | popcon         | size | description   |
|---------------------------------------|----------------|------|---|
| <a href="#">libfreetype6</a>          | V:585, I:997   | 1022 | <a href="#">FreeType</a> font rasterization library                       |
| <a href="#">libfontconfig1</a>        | V:576, I:816   | 344  | <a href="#">Fontconfig</a> font configuration library                     |
| <a href="#">fontconfig</a>            | V:467, I:696   | 415  | fc - *: CLI commands for <a href="#">Fontconfig</a>                       |
| <a href="#">font-manager</a>          | V:2.3, I:6.7   | 1116 | <a href="#">Font Manager</a> : GUI command for <a href="#">Fontconfig</a> |
| <a href="#">nautilus-font-manager</a> | V:0.08, I:0.40 | 38   | Nautilus extension for <a href="#">Font Manager</a>                       |

Table 7.5: List of notable font environment and related packages

## 7.6.2 Font rasterization

Debian uses [FreeType](#) to rasterize fonts. Its font choice infrastructure is provided by the [Fontconfig](#) font configuration library.

---

### Tip

Some font packages such as `fonts-noto*` install too many fonts. You may also want to keep some font packages installed but disabled under the normal use situation. The multiple [glyphs](#) are expected for some [Unicode](#) code points due to [Han unification](#) and unwanted glyphs may be chosen by the unconfigured Fontconfig library. One of the most annoying case is "U+3001 IDEOGRAPHIC COMMA" and "U+3002 IDEOGRAPHIC FULL STOP" among CJK countries. You can avoid this problematic situation easily by configuring font availability using Font Manager GUI ([font-manager](#)).

---

You can list font configuration state from the command line, too.

- `"fc-match(1)"` for fontconfig font default
- `"fc-list(1)"` for available fontconfig fonts

You can configure font configuration state from the text editor but this is non-trivial. See `fonts.conf(5)`.

## 7.7 Sandbox

Many mostly GUI applications on Linux are available in binary formats from non-Debian sources.

- [AppImage -- Linux apps that run anywhere](#)
- [FLATHUB -- Apps for Linux, right here](#)
- [snapcraft -- The app store for Linux](#)



### Warning

Binaries from these sites may include proprietary non-free software packages.

---

There is some *raison d'être* for these binary format distributions for Free Software aficionados using Debian since these can accommodate clean set of libraries used for each application by the respective upstream developer independent of the ones provided by Debian.

The inherent risk of running external binaries can be reduced by using the [sandbox environment](#) which leverages modern Linux security features (see Section [4.7.5](#)).

- For binaries from AppImage and some upstream sites, run them in [firejail](#) with [manual configuration](#).
- For binaries from FLATHUB, run them in [Flatpak](#) . (No manual configuration required.)
- For binaries from snapcraft, run them in [Snap](#) . (No manual configuration required. Compatible with daemon programs.)

The `xdg-desktop-portal` package provides a standardized API to common desktop features. See [xdg-desktop-portal \(flatpak\)](#) and [xdg-desktop-portal \(snap\)](#) .

This sandbox environment technology is very much like apps on smart phone OS where apps are executed under controlled resource accesses.

Some large GUI applications such as web browsers on Debian also use sandbox environment technology internally to make them more secure.

---



| package                                       | popcon       | size  | description   |
|---|--------------|-------|---|
| <a href="#">flatpak</a>                       | V:105, I:111 | 9080  | <a href="#">Flatpak</a> application deployment framework for desktop apps                       |
| <a href="#">gnome-software-plugin-flatpak</a> | V:29, I:41   | 283   | Flatpak support for GNOME Software  |
| <a href="#">snapd</a>                         | V:62, I:65   | 76444 | Daemon and tooling that enable <a href="#">snap</a> packages                                    |
| <a href="#">gnome-software-plugin-snap</a>    | V:1.5, I:2.3 | 145   | Snap support for GNOME Software   |
| <a href="#">xdg-desktop-portal</a>            | V:367, I:436 | 2291  | desktop integration portal for Flatpak and Snap   |
| <a href="#">xdg-desktop-portal-gtk</a>        | V:332, I:435 | 715   | <a href="#">xdg-desktop-portal</a> backend for gtk (GNOME)                                      |
| <a href="#">xdg-desktop-portal-kde</a>        | V:80, I:111  | 3027  | <a href="#">xdg-desktop-portal</a> backend for Qt (KDE)   |
| <a href="#">xdg-desktop-portal-wlr</a>        | V:2.1, I:6.3 | 159   | <a href="#">xdg-desktop-portal</a> backend for wlroots (Wayland)                                |
| <a href="#">firejail</a>                      | V:1.2, I:4.4 | 1827  | a SUID security sandbox program <a href="#">firejail</a> for use with <a href="#">Applimage</a> |

Table 7.6: List of notable sandbox environment and related packages

## 7.8 Remote desktop

## 7.9 X server connection

There are several ways to connect from an application on a remote host to the X server including `xwayland` on the local host.

### 7.9.1 X server local connection

Access to the local X server by the local applications which use X core protocol can be locally connected through a local UNIX domain socket. This can be authorized by the authority file holding [access cookie](#). The authority file location is identified by the `$XAUTHORITY` environment variable and X display is identified by the `$DISPLAY` environment variable. Since these are normally set automatically, no special action is needed, e.g. `gitk` as the following.

```
username $ gitk
```

#### Note

For `xwayland`, `XAUTHORITY` holds value like `"/run/user/1000/.mutter-xwaylandauth.YVSU30"`.

### 7.9.2 X server remote connection

Access to the local X server display from the remote applications which use X core protocol is supported by using the X11 forwarding feature.

- Open an `gnome-terminal` on the local host.
- Run `ssh(1)` with `-X` option to establish a connection with the remote site as the following.

```
localname @ localhost $ ssh -q -X loginname@remotehost.domain
Password:
```

| package                                    | popcon                       | size | protocols                       | description  |
|--|------------------------------|------|---------------------------------|--|
| <a href="#">gnome-remote-desktop</a>       | <a href="#">V:185, I:239</a> | 2444 | RDP                             | <a href="#">GNOME Remote Desktop</a> server                              |
| <a href="#">xrdp</a>                       | <a href="#">V:28, I:30</a>   | 4666 | RDP                             | <a href="#">xrdp</a> , Remote Desktop Protocol (RDP) server              |
| <a href="#">x11vnc</a>                     | <a href="#">V:8, I:45</a>    | 1863 | RFB (VNC)                       | <a href="#">x11vnc</a> , Remote Framebuffer Protocol (VNC) server        |
| <a href="#">tigervnc-standalone-server</a> | <a href="#">V:5, I:15</a>    | 2967 | RFB (VNC)                       | <a href="#">TigerVNC</a> , Remote Framebuffer Protocol (VNC) server      |
| <a href="#">gnome-connections</a>          | <a href="#">V:6, I:135</a>   | 1651 | RDP, RFB (VNC)                  | <a href="#">GNOME remote desktop</a> client                              |
| <a href="#">vinagre</a>                    | <a href="#">V:1, I:24</a>    | 4249 | RDP, RFB (VNC), SPICE, SSH      | <a href="#">Vinagre</a> : <a href="#">GNOME remote desktop</a> client    |
| <a href="#">remmina</a>                    | <a href="#">V:15, I:61</a>   | 982  | RDP, RFB (VNC), SPICE, SSH, ... | <a href="#">Remmina</a> : <a href="#">GTK remote desktop</a> client      |
| <a href="#">krdc</a>                       | <a href="#">V:2, I:16</a>    | 4144 | RDP, RFB (VNC)                  | <a href="#">KRDC</a> : <a href="#">KDE remote desktop</a> client         |
| <a href="#">virt-viewer</a>                | <a href="#">V:5, I:40</a>    | 1278 | RFB (VNC), SPICE                | <a href="#">Virtual Machine Manager's</a> GUI display client of guest OS |

Table 7.7: List of notable remote access server

| package                           | popcon                       | size | command                         | description                         |
|-----------------------------------|------------------------------|------|---------------------------------|-------------------------------------|
| <a href="#">openssh-server</a>    | <a href="#">V:768, I:819</a> | 3359 | sshd with option X11-forwarding | <a href="#">SSH</a> server (secure) |
| <a href="#">openssh-client</a>    | <a href="#">V:914, I:996</a> | 4210 | ssh -X                          | <a href="#">SSH</a> client (secure) |
| <a href="#">xauth</a>             | <a href="#">V:190, I:972</a> | 81   | xauth                           | X authority file utility            |
| <a href="#">x11-xserver-utils</a> | <a href="#">V:309, I:531</a> | 559  | xhost                           | server access control for X         |

Table 7.8: List of connection methods to the X server

- Run an X application command, e.g. "gitk", on the remote site as the following.

```
loginname @ remotehost $ gitk
```

This method can display the output from a remote X client as if it were locally connected through a local UNIX domain socket.

See Section 6.3 for SSH/SSHD.



#### Warning

A remote [TCP/IP](#) connection to the X server is disabled by default on the Debian system for security reasons. Don't enable them by simply setting "xhost +" nor by enabling [XDMCP connection](#), if you can avoid it.

### 7.9.3 X server chroot connection

Access to the X server by the applications which use X core protocol and run on the same host but in an environment such as chroot where the authority file is not accessible, can be authorized securely with xhost by using the [User-based access](#), e.g. "gitk" as the following.

```
username $ xhost + si:localuser:root ; sudo chroot /path/to
# cd /src
# gitk
# exit
username $ xhost -
```

## 7.10 Clipboard

For clipping text to clipboard, see Section 1.4.4.

For clipping graphics to clipboard, see Section 11.6.

Some CLI commands can manipulate character clipboard (PRIMARY and CLIPBOARD), too.

| package                      | popcon                       | package size        | target        | description   |
|------------------------------|------------------------------|---------------------|---------------|---|
| <a href="#">xsel</a>         | <a href="#">V:7, I:43</a>    | <a href="#">55</a>  | X             | command line interface to X selections (clipboard)                            |
| <a href="#">xclip</a>        | <a href="#">V:16, I:77</a>   | <a href="#">62</a>  | X             | command line interface to X selections (clipboard)                            |
| <a href="#">wl-clipboard</a> | <a href="#">V:8, I:25</a>    | <a href="#">174</a> | Wayland       | wl-copy wl-paste: command line interface to <a href="#">Wayland clipboard</a> |
| <a href="#">gpm</a>          | <a href="#">V:8.7, I:9.5</a> | <a href="#">524</a> | Linux console | a daemon that captures mouse events on Linux console                          |

Table 7.9: List of programs related to manipulating character clipboard

## Chapter 8

# I18N and L10N

[Multilingualization \(M17N\) or Native Language Support](#) for an application software is done in 2 steps.

- Internationalization (I18N): To make a software potentially handle multiple locales.
- Localization (L10N): To make a software handle an specific locale.

---

**Tip**

There are 17, 18, or 10 letters between "m" and "n", "i" and "n", or "l" and "n" in multilingualization, internationalization, and localization which correspond to M17N, I18N, and L10N. See [Internationalization and localization](#) for details.

---

### 8.1 The locale

The behavior of programs supporting internationalization are configured by the environment variable "\$LANG" to support localization. Actual support of locale dependent features by the `libc` library requires to install `locales` or `locales-all` packages. The `locales` package requires to be initialized properly.

If neither `locales` or `locales-all` package are installed, support of locale features are lost and system uses US English messages and handles data as **ASCII**. This behavior is the same way as "\$LANG" is set by "LANG=", "LANG=C", or "LANG=POSIX".

The modern software such as GNOME and KDE are multilingualized. They are internationalized by making them handle **UTF-8** data and localized by providing their translated messages through the `gettext(1)` infrastructure. Translated messages may be provided as separate localization packages.

The current Debian desktop GUI system normally sets the locale under GUI environment as "LANG=xx\_YY.UTF-8". Here, "xx" is [ISO 639 language codes](#) and "YY" is [ISO 3166 country codes](#). These values are set by the desktop configuration GUI dialogue and change the program behavior. See [Section 1.5.2](#)

#### 8.1.1 Rationale for UTF-8 locale

The simplest representation of the text data is **ASCII** which is sufficient for English and uses less than 127 characters (representable with 7 bits).

Even plain English text may contain non-ASCII characters, e.g. slightly curly left and right quotation marks are not available in ASCII.

```
b'"b'double quoted textb'"b' is not "double quoted ASCII"
b''b'single quoted textb''b' is not 'single quoted ASCII'
```

In order to support more characters, many character sets and encoding systems have been used to support many languages (see Table 11.2).

Unicode character set can represent practically all characters known to human with 21 bit code point range (i.e., 0 to 10FFFF in hexadecimal notation).

Text encoding system UTF-8 fits Unicode code points into a sensible 8 bit data stream mostly compatible with the ASCII data processing system. This makes UTF-8 the modern preferred choice. UTF stands for Unicode Transformation Format. When ASCII plain text data is converted to UTF-8 one, it has exactly the same content and size as the original ASCII one. So you loose nothing by deploying UTF-8 locale.

Under UTF-8 locale with the compatible application program, you can display and edit any foreign language text data as long as required fonts and input methods are installed and enabled. For example under "LANG=fr\_FR.UTF-8" locale, `gedit(1)` (text editor for the GNOME desktop) can display and edit Chinese character text data while presenting menus in French.

---

**Tip**

Both the new standard "en\_US.UTF-8" locale and the old standard "C"/"POSIX" locale use the standard US English message, they have subtle differences in sorting order etc. If you want to handle not only ASCII characters but also handle all UTF-8 encoded characters gracefully while maintaining the old "C" local behavior, use the non-standard "C.UTF-8" locale on Debian.

---

---

**Note**

Some programs consume more memory after supporting I18N. This is because they are coded to use UTF-32(UCS4) internally to support Unicode for speed optimization and consume 4 bytes per each ASCII character data independent of locale selected. Again, you loose nothing by deploying UTF-8 locale.

---

### 8.1.2 The reconfiguration of the locale

In order for the system to access a particular locale, the locale data must be compiled from the locale database.

The `locales` package does **not** come with pre-compiled locale data. You need to configure it as:

```
# dpkg-reconfigure locales
```

This process involves 2 steps.

1. Select all required locale data to be compiled into the binary form. (Please make sure to include at least one UTF-8 locale)
2. Set the system wide default locale value by creating `/etc/default/locale` for use by PAM (see Section 4.5).

The system wide default locale value set in `/etc/default/locale` may be overridden by the GUI configuration for GUI applications.

---

**Note**

Actual traditional encoding system can be identified by `/usr/share/i18n/SUPPORTED`. Thus, the "LANG=en\_US" is "LANG=en\_US.ISO-8859-1".

---

The `locales-all` package comes with pre-compiled locale data for all locale data. Since it doesn't create `/etc/default/locale`, you may still need to install the `locales` package, too.

---

**Tip**

The `locales` package of some Debian derivative distributions come with pre-compiled locale data for all locale data. You need to install both `locales` and `locales-all` packages on Debian to emulate such system environment.

---

### 8.1.3 Filename encoding

For cross platform data exchanges (see Section 10.1.7), you may need to mount some filesystem with particular encodings. For example, `mount(8)` for [vfat filesystem](#) assumes [CP437](#) if used without option. You need to provide explicit mount option to use [UTF-8](#) or [CP932](#) for filenames.

---

**Note**

When auto-mounting a hot-pluggable [USB flash drive](#) under modern desktop environment such as GNOME, you may provide such mount option by right clicking the icon on the desktop, click "Drive" tab, click to expand "Setting", and entering "utf8" to "Mount options:". The next time this USB flash drive is mounted, mount with UTF-8 is enabled.

---

---

**Note**

If you are upgrading system or moving disk drives from older non-UTF-8 system, file names with non-ASCII characters may be encoded in the historic and deprecated encodings such as [ISO-8859-1](#) or [eucJP](#). Please seek help of text conversion tools to convert them to [UTF-8](#). See Section 11.1.

---

[Samba](#) uses Unicode for newer clients (Windows NT, 200x, XP) but uses [CP850](#) for older clients (DOS and Windows 9x/Me) as default. This default for older clients can be changed using "dos charset" in the "/etc/samba/smb.conf" file, e.g., to [CP932](#) for Japanese.

### 8.1.4 Localized messages and translated documentation

Translations exist for many of the text messages and documents that are displayed in the Debian system, such as error messages, standard program output, menus, and manual pages. [GNU gettext\(1\) command tool chain](#) is used as the backend tool for most translation activities.

Under "Tasks" → "Localization" `aptitude(8)` provides an extensive list of useful binary packages which add localized messages to applications and provide translated documentation.

For example, you can obtain the localized message for manpage by installing the `manpages-LANG` package. To read the Italian-language manpage for *programname* from "/usr/share/man/it/", execute as the following.

```
LANG=it_IT.UTF-8 man programname
```

GNU gettext can accommodate priority list of translation languages with `$LANGUAGE` environment variable. For example:

```
$ export LANGUAGE="pt:pt_BR:es:it:fr"
```

For more, see `info gettext` and read the section "The LANGUAGE variable".

### 8.1.5 Effects of the locale

The sort order of characters with `sort(1)` and `ls(1)` are affected by the locale. Exporting `LANG=en_US.UTF-8` sorts in the dictionary A->a->B->b . . . ->Z->z order, while exporting `LANG=C.UTF-8` sorts in ASCII binary A->B->. . . ->Z->a->b order.

The date format of `ls(1)` is affected by the locale (see Section 9.3.4).

The date format of `date(1)` is affected by the locale. For example:

---

```
$ unset LC_ALL
$ LANG=en_US.UTF-8 date
Thu Dec 24 08:30:00 PM JST 2023
$ LANG=en_GB.UTF-8 date
Thu 24 Dec 20:30:10 JST 2023
$ LANG=es_ES.UTF-8 date
jue 24 dic 2023 20:30:20 JST
$ LC_TIME=en_DK.UTF-8 date
2023-12-24T20:30:30 JST
```

Number punctuation are different for locales. For example, in English locale, one thousand point one is displayed as "1,000.1" while in German locale, it is displayed as "1.000,1". You may see this difference in spreadsheet program.

Each detail feature of "\$LANG" environment variable may be overridden by setting "\$LC\_\*" variables. These environment variables can be overridden again by setting "\$LC\_ALL" variable. See `locale(7)` manpage for the details. Unless you have strong reason to create complicated configuration, please stay away from them and use only "\$LANG" variable set to one of the UTF-8 locales.

## 8.2 The keyboard input


The keyboard system can be configured at different layers of the system.

- Linux kernel: `keyboard(5)`
- X server: `setxkbmap(1)`, `xkeyboard-config(5)`, environment variable `XMODIFIERS`
- GUI desktop environment: Input Method framework: `ibus`, `fcitx5`
- Application: environment variables to set its input source: `GTK_IM_MODULE`, `QT_IM_MODULE`, `QT_IM_MODULES`, ...

Input method framework (IM) consists of:

- Input method engine (IME): Actual input method
- Configuration: Handles the configuration for IBus and other services such as IME
- Panel: User interface such as language bar and candidate selection table

Multilingual input to the application is processed roughly as:

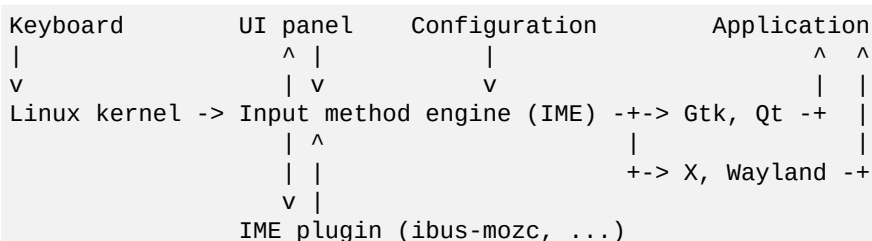

### 8.2.1 The keyboard input for Linux console and X Window

The Debian system can be configured to work with many international keyboard arrangements using the `keyboard-config` package.

```
# dpkg-reconfigure keyboard-configuration
```

For the Linux console and the X Window system, this updates configuration parameters in `/etc/default/keyboard`. Many non-ASCII characters including accented characters used by many European languages can be made available with [dead key](#), [AltGr key](#), and [compose key](#).

---

**Note**

If `ibus` is active, your classic X keyboard configuration by the `setxkbmap` may be overridden by `ibus` even under classic X-based desktop environment. You can disable installed `ibus` using `im-config` to set input method to "None". For more, see [Debian Wiki on keyboard](#).

---

## 8.2.2 The keyboard input for Wayland

Unlike the X Window protocol, the Wayland core protocol doesn't even support the input of accented characters. Popular Wayland Compositors, such as [Mutter](#) for GNOME or [KWin](#) for KDE, implement extension protocols such as the `text-input-unstable-v3` for the text input (see "[current Wayland protocols and their support status](#)").

The `text-input-unstable-v3` protocol works well with Input methods for Wayland (see "[Wayland input method project post-mortem](#)").

- Most GUI applications are built with GUI libraries such as GTK or Qt which support this `text-input-unstable-v3`.
- Popular Input Method Engines (IME), such as [IBus](#) or [Fcitx \(version 5\)](#), can work with this `text-input-unstable-v3`.
- IMEs support text input for many languages with plugins.
- Recent IMEs integrate [X Keyboard Extension \(XKB\)](#) functionalities such as `setxkbmap` previously provided by the X Window to support accented character text input for European languages for Wayland.

## 8.2.3 The input method support with IBus

For GNOME, "ibus" is the default IME which is automatically installed via its package dependency.

- Most multilingualized keyboard input features can be configured from "GNOME Settings" or "GNOME Tweaks".
- Some multilingualized keyboard input features may need to be configured from the `ibus-setup(1)` command.
- The [emoji](#) keyboard input is available by typing `SUPER-. (period)` followed by a keyword for each emoji and `SPACE-keys`.

The list of IBus and its plugin packages are the following.

## 8.2.4 The input method support with Fcitx

The [Fcitx](#) (version 5) input method framework is popular with Chinese users and compatible with "ibus".

The list of "fcitx5" and its plugin packages are the following.

## 8.2.5 An example for Japanese

I find the Japanese input method started under English environment ("`en_US.UTF-8`") very useful. Here is how I did this with IBus for GNOME on Wayland:

1. Install the Japanese input tool package `ibus-mozc` (or `ibus-anthy`).
-



| package                         | popcon                         | size                  | supported locale  |
|---------------------------------|--------------------------------|-----------------------|---|
| <a href="#">ibus</a>            | <a href="#">V:213, I:253</a>   | <a href="#">1828</a>  | input method framework using dbus                                   |
| <a href="#">ibus-mozc</a>       | <a href="#">V:2.1, I:3.8</a>   | <a href="#">978</a>   | Japanese  |
| <a href="#">ibus-anthy</a>      | <a href="#">V:0.5, I:1.2</a>   | <a href="#">8958</a>  | Japanese  |
| <a href="#">ibus-skk</a>        | <a href="#">V:0.04, I:0.15</a> | <a href="#">242</a>   | Japanese  |
| <a href="#">ibus-kkc</a>        | <a href="#">V:0.03, I:0.19</a> | <a href="#">211</a>   | Japanese  |
| <a href="#">ibus-libpinyin</a>  | <a href="#">V:1.2, I:5.1</a>   | <a href="#">2767</a>  | Chinese (for zh_CN)   |
| <a href="#">ibus-chewing</a>    | <a href="#">V:0.18, I:0.90</a> | <a href="#">288</a>   | Chinese (for zh_TW)   |
| <a href="#">ibus-libzhuyin</a>  | <a href="#">V:0.00, I:0.11</a> | <a href="#">41009</a> | Chinese (for zh_TW)   |
| <a href="#">ibus-rime</a>       | <a href="#">V:0.27, I:0.49</a> | <a href="#">78</a>    | Chinese (for zh_CN/zh_TW)   |
| <a href="#">ibus-cangjie</a>    | <a href="#">V:0.02, I:0.12</a> | <a href="#">235</a>   | Chinese (for zh_HK)   |
| <a href="#">ibus-hangul</a>     | <a href="#">V:0.3, I:2.0</a>   | <a href="#">264</a>   | Korean  |
| <a href="#">ibus-libthai</a>    | <a href="#">V:0.00, I:0.05</a> | <a href="#">84</a>    | Thai  |
| <a href="#">ibus-table-thai</a> | <a href="#">I:0.05</a>         | <a href="#">59</a>    | Thai  |
| <a href="#">ibus-unkey</a>      | <a href="#">V:0.20, I:0.42</a> | <a href="#">286</a>   | Vietnamese  |
| <a href="#">keyman</a>          | <a href="#">I:0.10</a>         | <a href="#">507</a>   | Multilingual: <a href="#">Keyman</a> plugin for over 2000 languages |
| <a href="#">ibus-table</a>      | <a href="#">V:0.08, I:0.99</a> | <a href="#">2271</a>  | table plugin for IBus   |
| <a href="#">ibus-m17n</a>       | <a href="#">V:0.3, I:2.0</a>   | <a href="#">373</a>   | Multilingual: Indic, Arabic and others                              |

Table 8.1: List of IBus and its plugin packages

| package                                    | popcon            | size                  | supported locale  |
|--|-------------------|-----------------------|---|
| <a href="#">fcitx5</a>                     | V:7, I:12         | <a href="#">761</a>   | input method framework compatible with "ibus"                       |
| <a href="#">fcitx5-mozc</a>                | V:1.0, I:1.6      | <a href="#">1260</a>  | Japanese  |
| <a href="#">fcitx5-anthy</a>               | V:0.06,<br>I:0.20 | <a href="#">808</a>   | Japanese  |
| <a href="#">fcitx5-skk</a>                 | V:0.05,<br>I:0.14 | <a href="#">369</a>   | Japanese  |
| <a href="#">fcitx5-kkc</a>                 | V:0.00,<br>I:0.06 | <a href="#">416</a>   | Japanese  |
| <a href="#">fcitx5-chinese-addons</a>      | I:9.0             | <a href="#">17</a>    | Chinese (metapackage for zh_*)                                      |
| <a href="#">fcitx5-pinyin</a>              | V:3.8, I:9.4      | <a href="#">1044</a>  | Chinese (for zh_CN)   |
| <a href="#">fcitx5-chewing</a>             | V:0.2, I:1.0      | <a href="#">217</a>   | Chinese (for zh_TW)   |
| <a href="#">fcitx5-zhuyin</a>              | I:0.06            | <a href="#">41051</a> | Chinese (for zh_TW)   |
| <a href="#">fcitx5-rime</a>                | V:0.44,<br>I:0.84 | <a href="#">371</a>   | Chinese (for zh_CN/zh_TW)   |
| <a href="#">fcitx5-table-cangjie-large</a> | I:0.12            | <a href="#">1292</a>  | Chinese (for zh_HK)   |
| <a href="#">fcitx5-hangul</a>              | V:0.09,<br>I:0.23 | <a href="#">235</a>   | Korean  |
| <a href="#">fcitx5-libthai</a>             | I:0.05            | <a href="#">119</a>   | Thai  |
| <a href="#">fcitx5-table-thai</a>          | I:0.08            | <a href="#">34</a>    | Thai  |
| <a href="#">fcitx5-unikey</a>              | V:0.08,<br>I:0.20 | <a href="#">588</a>   | Vietnamese  |
| <a href="#">fcitx5-m17n</a>                | V:0.12,<br>I:0.51 | <a href="#">259</a>   | Multilingual: Indic, Arabic and others                              |
| <a href="#">fcitx5-table</a>               | V:0.4, I:9.2      | <a href="#">520</a>   | table plugin for fcitx5   |
| <a href="#">fcitx5-keyman</a>              | V:0.03,<br>I:0.04 | <a href="#">235</a>   | Multilingual: <a href="#">Keyman</a> plugin for over 2000 languages |

Table 8.2: List of Fcitx5 and its plugin packages

2. Select "Settings" → "Keyboard" → "Input Sources" → click "+" in "Input Sources" → "Japanese" → "Japanese mozc (or anthy)" and click "Add" if it hasn't been activated.
3. You may choose as many input sources.
4. Relogin to user's account.
5. Setup each input source by right clicking the GUI toolbar icon.
6. Switch among installed input sources by SUPER-SPACE. (SUPER is normally the Windows key.)

---

#### Tip

If you wish to have access to alphabet only keyboard environment with the physical Japanese keyboard on which shift-2 has " (double quotation mark) engraved, you select "Japanese" in the above procedure. You can enter Japanese using "Japanese mozc (or anthy)" with physical "US" keyboard on which shift-2 has @ (at mark) engraved.

---

- For Wayland:
  - The `im-config` package does nothing and can be removed safely.
  - You probably don't need to set environment variables except for the backward compatibility etc.
  - If you need to set environment variables, create a file such as `~/.config/environment.d/50-input-method.conf` to set them.
- For X Window:
  - Install the `im-config` package.
  - The GUI menu entry for `im-config(8)` is "Input method".
  - Alternatively, execute "`im-config`" from user's shell.
  - `im-config(8)` behaves differently if command is executed from root or not.
  - `im-config(8)` enables the best input method on the system as default without any user actions.

## 8.3 The display output

Linux console can only display limited characters. (You need to use special terminal program such as `jfbterm(1)` to display non-European languages on the non-GUI console.)

GUI environment (Chapter 7) can display any characters in the UTF-8 as long as required fonts are installed and enabled. (The encoding of the original font data is taken care and transparent to the user.)

### 8.3.1 The terminal configuration

The Debian system can be configured to work with many international console arrangements using the `console-setup` package.

```
# dpkg-reconfigure console-setup
```

For the Linux console and the X Window system, this updates configuration parameters in `/etc/default/console-setup`. This also configures the Linux console font. Many non-ASCII characters including accented characters used by many European languages can be made available with [dead key](#), [AltGr key](#), and [compose key](#).

There are several components to configure character console and `ncurses(3)` system features.

- The `/etc/terminfo/*/*` file (`terminfo(5)`)
-

- The "\$TERM" environment variable (`term(7)`)
- `setterm(1)`, `stty(1)`, `tic(1)`, and `toe(1)`

If the `terminfo` entry for `xterm` doesn't work with a non-Debian `xterm`, change your terminal type, "\$TERM", from "xterm" to one of the feature-limited versions such as "xterm-r6" when you log in to a Debian system remotely. See `/usr/share/doc/libncurses5/FAQ` for more. "dumb" is the lowest common denominator for "\$TERM".

### 8.3.2 East Asian Ambiguous Character Width Characters

Under the East Asian locale, the box drawing, Greek, and Cyrillic characters may be displayed wider than your desired width to cause the unaligned terminal output (see [Unicode Standard Annex #11, 4.2 Ambiguous Characters](#)).

You can work around this problem:

- `gnome-terminal`: Preferences → Profiles → *Profile name* → Compatibility → Ambiguous-wide characters → Narrow
- `ncurses`: Set environment export `NCURSES_NO_UTF8_ACS=0`.

## Chapter 9

# System tips

Here, I describe basic tips to configure and manage systems, mostly from the console.

### 9.1 The console tips

There are some utility programs to help your console activities.

| package                  | popcon                         | size                 | description   |
|--------------------------|--------------------------------|----------------------|---|
| <a href="#">mc</a>       | <a href="#">V:41, I:182</a>    | <a href="#">1590</a> | See Section <a href="#">1.3</a>   |
| <a href="#">bsdutils</a> | <a href="#">V:444, I:999</a>   | <a href="#">334</a>  | <code>script(1)</code> command to make a record of terminal session           |
| <a href="#">screen</a>   | <a href="#">V:52, I:200</a>    | <a href="#">991</a>  | terminal multiplexer with VT100/ANSI terminal emulation                       |
| <a href="#">tmux</a>     | <a href="#">V:94, I:162</a>    | <a href="#">1291</a> | terminal multiplexer alternative (Use "Control-B" instead)                    |
| <a href="#">ripgrep</a>  | <a href="#">V:14, I:42</a>     | <a href="#">5294</a> | fast recursive string search in the source code tree with automatic filtering |
| <a href="#">fzf</a>      | <a href="#">V:8, I:35</a>      | <a href="#">4983</a> | fuzzy text finder   |
| <a href="#">fzy</a>      | <a href="#">V:0.08, I:0.36</a> | <a href="#">59</a>   | fuzzy text finder   |
| <a href="#">rlwrap</a>   | <a href="#">V:1, I:12</a>      | <a href="#">328</a>  | readline feature command line wrapper   |
| <a href="#">ledit</a>    | <a href="#">V:0.4, I:7.7</a>   | <a href="#">375</a>  | readline feature command line wrapper   |
| <a href="#">rlfe</a>     | <a href="#">V:0.03, I:0.49</a> | <a href="#">45</a>   | readline feature command line wrapper   |

Table 9.1: List of programs to support console activities

#### 9.1.1 Recording the shell activities cleanly

The simple use of `script(1)` (see Section [1.4.9](#)) to record shell activity produces a file with control characters. This can be avoided by using `col(1)` as the following.

```
$ script
Script started, file is typescript
```

Do whatever ... and press Ctrl-D to exit `script`.

```
$ col -bx < typescript > cleanedfile
$ vim cleanedfile
```

There are alternative methods to record the shell activities:

- Use `tee` (usable during the boot process in the `initramfs`):

```
$ sh -i 2>&1 | tee typescript
```

- Use `gnome-terminal` with the `extend-line-buffer` for scrollbar.
- Use `screen` with "`^A H`" (see Section 9.1.2) to perform recording of console.
- Use `vim` with `":terminal"` to enter the terminal mode. Use "`Ctrl-W N`" to exit from terminal mode to normal mode. Use `":w typescript"` to write the buffer to a file.
- Use `emacs` with "`M-x shell`", "`M-x eshell`", or "`M-x term`" to enter recording console. Use "`C-x C-w`" to write the buffer to a file.

### 9.1.2 The screen program

`screen(1)` not only allows one terminal window to work with multiple processes, but also allows **remote shell process to survive interrupted connections**. Here is a typical use scenario of `screen(1)`.

1. You login to a remote machine.
2. You start `screen` on a single console.
3. You execute multiple programs in `screen` windows created with `^A c` ("Control-A" followed by "c").
4. You switch among the multiple `screen` windows by `^A n` ("Control-A" followed by "n").
5. Suddenly you need to leave your terminal, but you don't want to lose your active work by keeping the connection.
6. You may **detach** the `screen` session by any methods.
  - Brutally unplug your network connection
  - Type `^A d` ("Control-A" followed by "d") and manually logging out from the remote connection
  - Type `^A DD` ("Control-A" followed by "DD") to have `screen` detach and log you out
7. You log in again to the same remote machine (even from a different terminal).
8. You start `screen` as `"screen -r"`.
9. `screen` magically **reattaches** all previous `screen` windows with all actively running programs.

---

#### Tip

You can save connection fees with `screen` for metered network connections such as dial-up and packet ones, because you can leave a process active while disconnected, and then re-attach it later when you connect again.

---

In a `screen` session, all keyboard inputs are sent to your current window except for the command keystroke. All `screen` command keystrokes are entered by typing `^A` ("Control-A") plus a single key [plus any parameters]. Here are important ones to remember.

See `screen(1)` for details.

See `tmux(1)` for functionalities of the alternative command.

---

| key binding        | meaning   |
|--------------------|---|
| <code>^A ?</code>  | show a help screen (display key bindings)         |
| <code>^A c</code>  | create a new window and switch to it              |
| <code>^A n</code>  | go to next window                                 |
| <code>^A p</code>  | go to previous window                             |
| <code>^A 0</code>  | go to window number 0                             |
| <code>^A 1</code>  | go to window number 1                             |
| <code>^A w</code>  | show a list of windows                            |
| <code>^A a</code>  | send a Ctrl-A to current window as keyboard input |
| <code>^A h</code>  | write a hardcopy of current window to file        |
| <code>^A H</code>  | begin/end logging current window to file          |
| <code>^A ^X</code> | lock the terminal (password protected)            |
| <code>^A d</code>  | detach screen session from the terminal           |
| <code>^A DD</code> | detach screen session and log out                 |

Table 9.2: List of key bindings for screen

### 9.1.3 Navigating around directories

In Section 1.4.2, 2 tips to allow quick navigation around directories are described: `$CDPATH` and `mc`.

If you use fuzzy text filter program, you can do without typing the exact path. For `fzf`, include following in `~/ .bashrc`.

```
FZF_KEYBINDINGS_PATH=/usr/share/doc/fzf/examples/key-bindings.bash
if [ -f $FZF_KEYBINDINGS_PATH ]; then
    . $FZF_KEYBINDINGS_PATH
fi
```

For example:

- You can jump to a very deep subdirectory with minimal efforts. You first type `"cd **"` and press Tab. Then you will be prompted with candidate paths. Typing in partial path strings, e.g., `s/d/b foo`, will narrow down candidate paths. You select the path to be used by `cd` with cursor and return keys.
- You can select a command from the command history more efficiently with minimal efforts. You press `Ctrl-R` at the command prompt. Then you will be prompted with candidate commands. Typing in partial command strings, e.g., `vim d`, will narrow down candidates. You select the one to be used with cursor and return keys.

### 9.1.4 Readline wrapper

Some commands such as `/usr/bin/dash` which lacks command line history editing capability can add such functionality transparently by running under `rlwrap` or its equivalents.

```
$ rlwrap dash -i
```

This provides convenient platform to test subtle points for `dash` with friendly bash-like environment.

### 9.1.5 Scanning the source code tree

The `rg(1)` command in the `ripgrep` package offers a faster alternative to the `grep(1)` command for scanning the source code tree for typical situation. It takes advantage of modern multi-core CPUs and automatically applies reasonable filters to skip some files.

## 9.2 Customizing vim

After you learn basics of vim(1) through Section 1.4.8, please read Bram Moolenaar's "[Seven habits of effective text editing \(2000\)](#)" to understand how vim should be used.

### 9.2.1 Customizing vim with internal features

The behavior of vim can be changed significantly by enabling its internal features through the Ex-mode commands such as "set ..." to set vim options.

These Ex-mode commands can be included in user's vimrc file, traditional "~/.vimrc" or git-friendly "~/.vim/vimrc". Here is a very simple example [1](#):

```
"""" Generic baseline Vim and Neovim configuration (~/.vimrc)
"""" - For NeoVim, use "nvim -u ~/.vimrc [filename]"
""""
let mapleader = ' '          " :h mapleader
""""
set nocompatible             " :h 'cp -- sensible (n)vim mode
syntax on                   " :h :syn-on
filetype plugin indent on    " :h :filetype-overview
set encoding=utf-8          " :h 'enc (default: latin1) -- sensible encoding
"""" current vim option value can be verified by :set encoding?
set backspace=indent,eol,start " :h 'bs (default: nobs) -- sensible BS
set statusline=%<%f%m%r%h%w%=%y[U+%04B]%2l/%2L=%P,%2c%V
set listchars=eol:␣,tab:b'␣b'\ ,extends:b'␣b',precedes:b'␣b',nbsp:b'␣b'
set viminfo=!,100,<5000,s100,h " :h 'vi -- bigger copy buffer etc.
"""" Pick "colorscheme" from blue darkblue default delek desert elflord evening
"""" habamax industry koehler lunaperche morning murphy pablo peachpuff quiet ron
"""" shine slate torte zellner
colorscheme industry
"""" don't pick "colorscheme" as "default" which may kill SpellUnderline settings
set scrolloff=5             " :h 'scr -- show 5 lines around cursor
set laststatus=2            " :h 'ls (default 1) k
"""" boolean options can be unset by prefixing "no"
set ignorecase              " :h 'ic
set smartcase               " :h 'scs
set autoindent              " :h 'ai
set smartindent             " :h 'si
set nowrap                  " :h 'wrap
"set list                   " :h 'list (default nolist)
set noerrorbells            " :h 'eb
set novisualbell            " :h 'vb
set t_vb=                   " :h 't_vb -- termcap visual bell
set spell                   " :h 'spell
set spelllang=en_us,cjk     " :h 'spl -- english spell, ignore CJK
set clipboard=unnamedplus   " :h 'cb -- cut/copy/paste with other app
set hidden                  " :h 'hid
set autowrite               " :h 'aw
set timeoutlen=300          " :h 'tm
```

The keymap of vim can be changed in user's vimrc file. E.g.:



#### Caution

Don't try to change the default key bindings without very good reasons.

<sup>1</sup>More elaborate customization examples: "[Vim Galore](#)", "[sensible.vim](#)", ...



```

"""" Popular mappings (imitating LazyVim etc.)
"""" Window moves without using CTRL-W which is dangerous in INSERT mode
nnoremap <C-H> <C-W>h
nnoremap <C-J> <C-W>j
nnoremap <C-K> <C-W>k
silent! nnoremap <C-L> <C-W>l
"""" Window resize
nnoremap <C-LEFT> <CMD>vertical resize -2<CR>
nnoremap <C-DOWN> <CMD>resize -2<CR>
nnoremap <C-UP> <CMD>resize +2<CR>
nnoremap <C-RIGHT> <CMD>vertical resize +2<CR>
"""" Clear hlsearch with <ESC> (<C-L> is mapped as above)
nnoremap <ESC> <CMD>noh<CR><ESC>
inoremap <ESC> <CMD>noh<CR><ESC>
"""" center after jump next
nnoremap n nzz
nnoremap N Nzz
"""" fast "jk" to get out of INSERT mode (<ESC>)
inoremap jk <CMD>noh<CR><ESC>
"""" fast "<ESC><ESC>" to get out of TERM mode (CTRL-\ CTRL-N)
tnoremap <ESC><ESC> <C-\><C-N>
"""" fast "jk" to get out of TERM mode (CTRL-\ CTRL-N)
tnoremap jk <C-\><C-N>
"""" previous/next trouble/quickfix item
nnoremap [q <CMD>cprevious<CR>
nnoremap ]q <CMD>cnext<CR>
"""" buffers
nnoremap <S-H> <CMD>bprevious<CR>
nnoremap <S-L> <CMD>bnext<CR>
nnoremap [b <CMD>bprevious<CR>
nnoremap ]b <CMD>bnext<CR>
"""" Add undo break-points
inoremap , ,<C-G>u
inoremap . .<C-G>u
inoremap ; ;<C-G>u
"""" save file
inoremap <C-S> <CMD>w<CR><ESC>
xnoremap <C-S> <CMD>w<CR><ESC>
nnoremap <C-S> <CMD>w<CR><ESC>
snoremap <C-S> <CMD>w<CR><ESC>
"""" better indenting
vnoremap < <gv
vnoremap > >gv
"""" terminal (Somehow under Linux, <C-/> becomes <C-_> in Vim)
nnoremap <C-_> <CMD>terminal<CR>
nnoremap <C-/> <CMD>terminal<CR>
""""
if ! has('nvim')
"""" Toggle paste mode with <SPACE>p for Vim (no need for Nvim)
set pastetoggle=<leader>p
"""" nvim default mappings for Vim. See :h default-mappings in nvim
"""" copy to EOL (no delete) like D for d
noremap Y y$
"""" sets a new undo point before deleting
inoremap <C-U> <C-G>u<C-U>
inoremap <C-W> <C-G>u<C-W>
"""" <C-L> is re-purposed as above
"""" execute the previous macro recorded with Q
nnoremap Q @@
"""" repeat last substitute and *KEEP* flags
nnoremap & :&&<CR>

```

```
"""" search visual selected string for visual mode
xnoremap * y/\V<C-R>"<CR>
xnoremap # y?/\V<C-R>"<CR>
endif
```

In order for the above keybindings to function properly, the terminal program needs to be configured to generate "ASCII DEL" for Backspace-key and "Escape sequence" for Delete-key.

Other miscellaneous configuration can be changed in user's vimrc file. E.g.:

```
"""" Use faster 'rg' (ripgrep package) for :grep
if executable("rg")
    set grepprg=rg\ --vimgrep\ --smart-case
    set grepformat=%f:%l:%c:%m
endif
"""" Retain last cursor position :h ""
augroup RetainLastCursorPosition
    autocmd!
    autocmd BufReadPost *
        \ if line("\n") > 0 && line("\n") <= line("$") |
        \   exe "normal! g'\n" |
        \ endif
augroup END
"""" Force to use underline for spell check results
augroup SpellUnderline
    autocmd!
    autocmd ColorScheme * highlight SpellBad term=Underline gui=Undercurl
    autocmd ColorScheme * highlight SpellCap term=Underline gui=Undercurl
    autocmd ColorScheme * highlight SpellLocal term=Underline gui=Undercurl
    autocmd ColorScheme * highlight SpellRare term=Underline gui=Undercurl
augroup END
"""" highlight trailing spaces except when typing as red (set after colorscheme)
highlight TailingWhitespaces ctermbg=red guibg=red
"""" \s\+      1 or more whitespace character: <Space> and <Tab>
"""" \%#\@<! Matches with zero width if the cursor position does NOT match.
match TailingWhitespaces /\s\+\%#\@<!$/
```

## 9.2.2 Customizing vim with external packages

Interesting external plugin packages can be found:

- [Vim - the ubiquitous text editor](#) -- The official upstream site of Vim and vim scripts
- [VimAwsome](#) -- The listing of Vim plugins
- [vim-scripts](#) -- Debian package: a collection of vim scripts

Plugin packages in the [vim-scripts](#) package can be enabled using user's vimrc file. E.g.:

```
packadd! secure-modelines
packadd! winmanager
" IDE-like UI for files and buffers with <space>w
nnoremap <leader>w          :WMToggle<CR>
```

The new native Vim package system works nicely with "git" and "git submodule". One such example configuration can be found at [my git repository: dot-vim](#). This does essentially:

- By using "git" and "git submodule", latest external packages, such as "*name*", are placed into `~/.vim/pack/*/opt/` and similar.
- By adding `:packadd! name` line to user's vimrc file, these packages are placed on runtimepath.
- Vim loads these packages on runtimepath during its initialization.
- At the end of its initialization, tags for the installed documents are updated with "`helptags ALL`".

For more, please start vim with "`vim --startuptime vimstart.log`" to check actual execution sequence and time spent for each step.

It is quite confusing to see too many ways<sup>2</sup> to manage and load these external packages to vim. Checking the original information is the best cure.

| key strokes                     | information  |
|---------------------------------|--|
| <code>:help package</code>      | explanation on the vim package mechanism   |
| <code>:help runtimepath</code>  | explanation on the runtimepath mechanism   |
| <code>:version</code>           | internal states including candidates for the vimrc file  |
| <code>:echo \$VIM</code>        | the environment variable "\$VIM" used to locate the vimrc file                                       |
| <code>:set runtimepath?</code>  | list of directories which will be searched for all runtime support files                             |
| <code>:echo \$VIMRUNTIME</code> | the environment variable "\$VIMRUNTIME" used to locate various system provided runtime support files |

Table 9.3: Information on the initialization of vim

## 9.3 Data recording and presentation

### 9.3.1 The log daemon

Many traditional programs record their activities in the text file format under the `/var/log/` directory.

`logrotate(8)` is used to simplify the administration of log files on a system which generates a lot of log files.

Many new programs record their activities in the binary file format using `systemd-journald(8)` Journal service under the `/var/log/journal` directory.

You can log data to the `systemd-journald(8)` Journal from a shell script by using the `systemd-cat(1)` command.

See Section 3.5 and Section 3.4.

### 9.3.2 Log analyzer

Here are notable log analyzers ("`~Gsecurity::log-analyzer`" in `aptitude(8)`).

---

#### Note

[CRM114](#) provides language infrastructure to write **fuzzy** filters with the [TRE regex library](#). Its popular use is spam mail filter but it can be used as log analyzer.

---



---

<sup>2</sup>[vim-pathogen](#) was popular.

---

| package                    | popcon         | size | description   |
|----------------------------|----------------|------|---|
| <a href="#">fail2ban</a>   | V:101, I:111   | 2192 | ban IPs that cause multiple authentication errors             |
| <a href="#">logwatch</a>   | V:9, I:11      | 2436 | log analyzer with nice output written in Perl                 |
| <a href="#">awstats</a>    | V:5.5, I:8.5   | 6934 | powerful and featureful web server log analyzer               |
| <a href="#">analog</a>     | V:3, I:85      | 3739 | web server log analyzer                                       |
| <a href="#">sarg</a>       | V:0.74, I:0.81 | 863  | squid analysis report generator                               |
| <a href="#">pflogsumm</a>  | V:1.5, I:3.7   | 173  | Postfix log entry summarizer                                  |
| <a href="#">fwlogwatch</a> | V:0.11, I:0.17 | 487  | firewall log analyzer   |
| <a href="#">squidview</a>  | V:0.03, I:0.45 | 224  | monitor and analyze squid access.log files                    |
| <a href="#">swatch</a>     | V:0.09, I:0.30 | 99   | log file viewer with regexp matching, highlighting, and hooks |
| <a href="#">crm114</a>     | V:0.07, I:0.34 | 1371 | Controllable Regex Mutilator and Spam Filter (CRM114)         |
| <a href="#">icmpinfo</a>   | V:0.01, I:0.33 | 42   | interpret ICMP messages                                       |

Table 9.4: List of system log analyzers

### 9.3.3 Customized display of text data

Although pager tools such as `more(1)` and `less(1)` (see Section 1.4.5) and custom tools for highlighting and formatting (see Section 11.1.8) can display text data nicely, general purpose editors (see Section 1.4.6) are most versatile and customizable.

#### Tip

For `vim(1)` and its pager mode alias `view(1)`, `":set hl"` enables highlighted search.

### 9.3.4 Customized display of time and date

The default display format of time and date by the `"ls -l"` command depends on the **locale** (see Section 1.2.6 for value). The `"$LANG"` variable is referred first and it can be overridden by the `"$LC_TIME"` or `"$LC_ALL"` exported environment variables.

The actual default display format for each locale depends on the version of the standard C library (the `libc6` package) used. I.e., different releases of Debian had different defaults. For iso-formats, see [ISO 8601](#).

If you really wish to customize this display format of time and date beyond the **locale**, you should set the **time style value** by the `"--time-style"` argument or by the `"$TIME_STYLE"` value (see `ls(1)`, `date(1)`, `"info coreutils 'ls invocation'"`).

#### Tip

You can eliminate typing long option on commandline using command alias (see Section 1.5.9):

```
alias ls='ls --time-style=+%d.%m.%y %H:%M'
```

### 9.3.5 Colorized shell echo

Shell echo to most modern terminals can be colorized using [ANSI escape code](#) (see `"/usr/share/doc/xterm/ctlseqs`. For example, try the following

| time style value | locale           | display of time and date               |
|------------------|------------------|--|
| iso              | any              | 01-19 00:15                            |
| long-iso         | any              | 2009-01-19 00:15                       |
| full-iso         | any              | 2009-01-19 00:15:16.000000000<br>+0900 |
| locale           | C                | Jan 19 00:15                           |
| locale           | en_US.UTF-8      | Jan 19 00:15                           |
| locale           | es_ES.UTF-8      | ene 19 00:15                           |
| +%d.%m.%y %H:%M  | any              | 19.01.09 00:15                         |
| +%d.%b.%y %H:%M  | C or en_US.UTF-8 | 19.Jan.09 00:15                        |
| +%d.%b.%y %H:%M  | es_ES.UTF-8      | 19.ene.09 00:15                        |

Table 9.5: Display examples of time and date for the "ls -l" command with the **time style value**

```
$ RED=$(printf "\x1b[31m")
$ NORMAL=$(printf "\x1b[0m")
$ REVERSE=$(printf "\x1b[7m")
$ echo "${RED}RED-TEXT${NORMAL} ${REVERSE}REVERSE-TEXT${NORMAL}"
```

### 9.3.6 Colorized commands

Colorized commands are handy for inspecting their output in the interactive environment. I include the following in my "~/.bashrc".

```
if [ "$TERM" != "dumb" ]; then
    eval "`dircolors -b`"
    alias ls='ls --color=always'
    alias ll='ls --color=always -l'
    alias la='ls --color=always -A'
    alias less='less -R'
    alias ls='ls --color=always'
    alias grep='grep --color=always'
    alias egrep='egrep --color=always'
    alias fgrep='fgrep --color=always'
    alias zgrep='zgrep --color=always'
else
    alias ll='ls -l'
    alias la='ls -A'
fi
```

The use of alias limits color effects to the interactive command usage. It has advantage over exporting environment variable "export GREP\_OPTIONS='--color=auto'" since color can be seen under pager programs such as less(1). If you wish to suppress color when piping to other programs, use "--color=auto" instead in the above example for "~/.bashrc".

#### Tip

You can turn off these colorizing aliases in the interactive environment by invoking shell with "TERM=dumb bash".

### 9.3.7 Recording the editor activities for complex repeats

You can record the editor activities for complex repeats.

For [Vim](#), as follows.

- "qa": start recording typed characters into named register "a".
- ... editor activities
- "q": end recording typed characters.
- "@a": execute the contents of register "a".

For [Emacs](#), as follows.

- "C-x (": start defining a keyboard macro.
- ... editor activities
- "C-x)": end defining a keyboard macro.
- "C-x e": execute a keyboard macro.

### 9.3.8 Recording the graphics image of an X application

There are few ways to record the graphics image of an X application, including an xterm display.

| package                          | popcon      | size  | screen      |
|----------------------------------|-------------|-------|-------------|
| <a href="#">gnome-screenshot</a> | V:12, I:101 | 1115  | Wayland     |
| <a href="#">flameshot</a>        | V:8, I:18   | 3534  | Wayland     |
| <a href="#">gimp</a>             | V:44, I:217 | 32791 | Wayland + X |
| <a href="#">x11-apps</a>         | V:30, I:446 | 2461  | X           |
| <a href="#">imagemagick</a>      | V:9, I:279  | 79    | X           |
| <a href="#">scrot</a>            | V:4, I:50   | 144   | X           |

Table 9.6: List of graphics image manipulation tools

### 9.3.9 Recording changes in configuration files

There are specialized tools to record changes in configuration files with help of DVCS and to make system snapshots on [Btrfs](#).

| package                   | popcon       | size | description  |
|---------------------------|--------------|------|--|
| <a href="#">etckeeper</a> | V:24, I:27   | 157  | store configuration files and their metadata with <a href="#">Git</a> (default), <a href="#">Mercurial</a> , or <a href="#">GNU Bazaar</a> |
| <a href="#">timeshift</a> | V:8, I:14    | 4481 | system restore utility using rsync or BTRFS snapshots  |
| <a href="#">snapper</a>   | V:6.1, I:8.1 | 2396 | Linux filesystem snapshot management tool  |

Table 9.7: List of packages which can record configuration history

You may also think about local script [Section 10.2.3](#) approach.

| package                   | popcon                         | size                  | description  |
|---------------------------|--------------------------------|-----------------------|--|
| <a href="#">coreutils</a> | <a href="#">V:911, I:1000</a>  | <a href="#">17994</a> | nice(1): run a program with modified scheduling priority                     |
| <a href="#">bsdutils</a>  | <a href="#">V:444, I:999</a>   | <a href="#">334</a>   | renice(1): modify the scheduling priority of a running process               |
| <a href="#">procps</a>    | <a href="#">V:834, I:997</a>   | <a href="#">2389</a>  | "/proc" filesystem utilities: ps(1), top(1), kill(1), watch(1), ...          |
| <a href="#">psmisc</a>    | <a href="#">V:405, I:728</a>   | <a href="#">950</a>   | "/proc" filesystem utilities: killall(1), fuser(1), peekfd(1), pstree(1)     |
| <a href="#">time</a>      | <a href="#">V:6, I:81</a>      | <a href="#">148</a>   | time(1): run a program to report system resource usages with respect to time |
| <a href="#">sysstat</a>   | <a href="#">V:120, I:166</a>   | <a href="#">1904</a>  | sar(1), iostat(1), mpstat(1), ...: system performance tools for Linux        |
| <a href="#">isag</a>      | <a href="#">V:0.1, I:3.3</a>   | <a href="#">109</a>   | Interactive System Activity Grapher for sysstat                              |
| <a href="#">lsof</a>      | <a href="#">V:445, I:949</a>   | <a href="#">492</a>   | lsof(8): list files opened by a running process using "-p" option            |
| <a href="#">strace</a>    | <a href="#">V:10, I:102</a>    | <a href="#">4393</a>  | strace(1): trace system calls and signals                                    |
| <a href="#">ltrace</a>    | <a href="#">V:1, I:12</a>      | <a href="#">420</a>   | ltrace(1): trace library calls   |
| <a href="#">xtrace</a>    | <a href="#">V:0.04, I:0.70</a> | <a href="#">342</a>   | xtrace(1): trace communication between X11 client and server                 |
| <a href="#">powertop</a>  | <a href="#">V:34, I:225</a>    | <a href="#">696</a>   | power top(1): information about system power use                             |
| <a href="#">cron</a>      | <a href="#">V:922, I:997</a>   | <a href="#">247</a>   | run processes according to a schedule in background from cron(8) daemon      |
| <a href="#">anacron</a>   | <a href="#">V:419, I:477</a>   | <a href="#">110</a>   | cron-like command scheduler for systems that don't run 24 hours a day        |
| <a href="#">at</a>        | <a href="#">V:73, I:98</a>     | <a href="#">158</a>   | at(1) or batch(1): run a job at a specified time or below certain load level |

Table 9.8: List of tools for monitoring and controlling program activities

## 9.4 Monitoring, controlling, and starting program activities

Program activities can be monitored and controlled using specialized tools.

### Tip

The `procp`s packages provide very basics of monitoring, controlling, and starting program activities. You should learn all of them.

### 9.4.1 Timing a process

Display time used by the process invoked by the command.

```
# time some_command >/dev/null
real    0m0.035s      # time on wall clock (elapsed real time)
user    0m0.000s      # time in user mode
sys     0m0.020s      # time in kernel mode
```

### 9.4.2 The scheduling priority

A nice value is used to control the scheduling priority for the process.

| nice value | scheduling priority                            |
|------------|--|
| 19         | lowest priority process (nice)                 |
| 0          | very high priority process for user            |
| -20        | very high priority process for root (not-nice) |

Table 9.9: List of nice values for the scheduling priority

```
# nice -19 top # very nice
# nice --20 wodim -v -eject speed=2 dev=0,0 disk.img # very fast
```

Sometimes an extreme nice value does more harm than good to the system. Use this command carefully.

### 9.4.3 The ps command

The `ps(1)` command on a Debian system support both BSD and SystemV features and helps to identify the process activity statically.

| style    | typical command      | feature           |
|----------|----------------------|-------------------|
| BSD      | <code>ps aux</code>  | display %CPU %MEM |
| System V | <code>ps -efH</code> | display PPID      |

Table 9.10: List of ps command styles

For the zombie (defunct) children process, you can kill them by the parent process ID identified in the "PPID" field.

The `ps tree(1)` command display a tree of processes.



### 9.4.4 The top command

`top(1)` on the Debian system has rich features and helps to identify what process is acting funny dynamically.

It is an interactive full screen program. You can get its usage help press by pressing the "h"-key and terminate it by pressing the "q"-key.

### 9.4.5 Listing files opened by a process

You can list all files opened by a process with a process ID (PID), e.g. 1, by the following.

```
$ sudo lsof -p 1
```

PID=1 is usually the `init` program.

### 9.4.6 Tracing program activities

You can trace program activity with `strace(1)`, `ltrace(1)`, or `xtrace(1)` for system calls and signals, library calls, or communication between X11 client and server.

You can trace system calls of the `ls` command as the following.

```
$ sudo strace ls
```

---

**Tip**

Use **strace-graph** script found in `/usr/share/doc/strace/examples/` to make a nice tree view

---

### 9.4.7 Identification of processes using files or sockets

You can also identify processes using files by `fuser(1)`, e.g. for `/var/log/mail.log` by the following.

```
$ sudo fuser -v /var/log/mail.log
                USER      PID ACCESS COMMAND
/var/log/mail.log: root    2946 F.... rsyslogd
```

You see that file `/var/log/mail.log` is open for writing by the `rsyslogd(8)` command.

You can also identify processes using sockets by `fuser(1)`, e.g. for `smtp/tcp` by the following.

```
$ sudo fuser -v smtp/tcp
                USER      PID ACCESS COMMAND
smtp/tcp:      Debian-exim  3379 F.... exim4
```

Now you know your system runs `exim4(8)` to handle [TCP](#) connections to [SMTP](#) port (25).

### 9.4.8 Repeating a command with a constant interval

`watch(1)` executes a program repeatedly with a constant interval while showing its output in fullscreen.

```
$ watch w
```

This displays who is logged on to the system updated every 2 seconds.

---

### 9.4.9 Repeating a command looping over files

There are several ways to repeat a command looping over files matching some condition, e.g. matching glob pattern `"*.ext"`.

- Shell for-loop method (see Section [12.1.4](#)):

```
for x in *.ext; do if [ -f "$x" ]; then command "$x" ; fi; done
```

- `find(1)` and `xargs(1)` combination:

```
find . -type f -maxdepth 1 -name '*.ext' -print0 | xargs -0 -n 1 command
```

- `find(1)` with `"-exec"` option with a command:

```
find . -type f -maxdepth 1 -name '*.ext' -exec command '{}' \;
```

- `find(1)` with `"-exec"` option with a short shell script:

```
find . -type f -maxdepth 1 -name '*.ext' -exec sh -c "command '{}'" && echo 'successful'" \;
```

The above examples are written to ensure proper handling of funny file names such as ones containing spaces. See Section [10.1.5](#) for more advance uses of `find(1)`.

### 9.4.10 Starting a program from GUI

For the [command-line interface \(CLI\)](#), the first program with the matching name found in the directories specified in the `$PATH` environment variable is executed. See Section [1.5.3](#).

For the [graphical user interface \(GUI\)](#) compliant to the [freedesktop.org](#) standards, the `*.desktop` files in the `/usr/share/applications/` directory provide necessary attributes for the GUI menu display of each program. Each package which is compliant to Freedesktop.org's xdg menu system installs its menu data provided by `"*.desktop"` under `"/usr/share/applications/"`. Modern desktop environments which are compliant to Freedesktop.org standard use these data to generate their menu using the `xdg-utils` package. See `"/usr/share/doc/xdg-utils/README"`.

For example, the `chromium.desktop` file defines attributes for the "Chromium Web Browser" such as "Name" for the program name, "Exec" for the program execution path and arguments, "Icon" for the icon used, etc. (see the [Desktop Entry Specification](#)) as follows:

```
[Desktop Entry]
Version=1.0
Name=Chromium Web Browser
GenericName=Web Browser
Comment=Access the Internet
Comment[fr]=Explorer le Web
Exec=/usr/bin/chromium %U
Terminal=false
X-MultipleArgs=false
Type=Application
Icon=chromium
Categories=Network;WebBrowser;
MimeType=text/html;text/xml;application/xhtml+xml;x-scheme-handler/http;x-scheme-handler/https;
StartupWMClass=Chromium
StartupNotify=true
```

This is an oversimplified description. The \*.desktop files are scanned as follows.

The desktop environment sets \$XDG\_DATA\_HOME and \$XDG\_DATA\_DIR environment variables. For example, under the GNOME:

- \$XDG\_DATA\_HOME is unset. (The default value of \$HOME/.local/share is used.)
- \$XDG\_DATA\_DIRS is set to /usr/share/gnome:/usr/local/share/:/usr/share/.

So the base directories (see [XDG Base Directory Specification](#)) and the applications directories are as follows.

- \$HOME/.local/share/ → \$HOME/.local/share/applications/
- /usr/share/gnome/ → /usr/share/gnome/applications/
- /usr/local/share/ → /usr/local/share/applications/
- /usr/share/ → /usr/share/applications/

The \*.desktop files are scanned in these applications directories in this order.

---

**Tip**

A user custom GUI menu entry can be created by adding a \*.desktop file in the \$HOME/.local/share/applications/ directory.

---

---

**Tip**

The "Exec= . . ." line isn't parsed by the shell. Use the env(1) command if environment variables need to be set.

---

---

**Tip**

Similarly, if a \*.desktop file is created in the autostart directory under these base directories, the specified program in the \*.desktop file is executed automatically when the desktop environment is started. See [Desktop Application Autostart Specification](#).

---

---

**Tip**

Similarly, if a \*.desktop file is created in the \$HOME/Desktop directory and the Desktop environment is configured to support the desktop icon launcher feature, the specified program in it is executed upon clicking the icon. Please note that the actual name of the \$HOME/Desktop directory is locale dependent. See xdg-user-dirs-update(1).

---

### 9.4.11 Customizing program to be started

Some programs start another program automatically. Here are check points for customizing this process.

- Application configuration menu:
    - GNOME desktop: "Settings" → "Apps" → "Default Apps"
    - KDE desktop: "Application Launcher" → "System Settings" → "Default Applications"
    - Iceweasel browser: "Edit" → "Preferences" → "Applications"
    - mc(1): "/etc/mc/mc.ext"
-

- Environment variables such as "\$BROWSER", "\$EDITOR", "\$VISUAL", and "\$PAGER" (see `environ(7)`)
- The `update-alternatives(1)` system for programs such as "editor", "view", "x-www-browser", "gnome-www-browser" and "www-browser" (see Section 1.4.7)
- the "~/.mailcap" and "/etc/mailcap" file contents which associate [MIME](#) type with program (see `mailcap(5)`)
- The "~/.mime.types" and "/etc/mime.types" file contents which associate file name extension with [MIME](#) type (see `run-mailcap(1)`)

---

**Tip**

`update-mime(8)` updates the "/etc/mailcap" file using "/etc/mailcap.order" file (see `mailcap.order(5)`).

---

---

**Tip**

The `debiantutils` package provides `sensible-browser(1)`, `sensible-editor(1)`, and `sensible-pager(1)` which make sensible decisions on which editor, pager, and web browser to call, respectively. I recommend you to read these shell scripts.

---

---

**Tip**

In order to run a console application such as `mutt` under GUI as your preferred application, you should create an GUI application as following and set "/usr/local/bin/mutt-term" as your preferred application to be started as described.

```
# cat /usr/local/bin/mutt-term <<EOF
#!/bin/sh
gnome-terminal -e "mutt \${@}"
EOF
# chmod 755 /usr/local/bin/mutt-term
```

---

### 9.4.12 Killing a process

Use `kill(1)` to kill (or send a signal to) a process by the process ID.

Use `killall(1)` or `pkill(1)` to do the same by the process command name and other attributes.

### 9.4.13 Scheduling tasks once

Run the `at(1)` command to schedule a one-time job by the following.

```
$ echo 'command -args' | at 3:40 monday
```

### 9.4.14 Scheduling tasks regularly

Use `cron(8)` to schedule tasks regularly. See `crontab(1)` and `crontab(5)`.

You can schedule to run processes as a normal user, e.g. `foo` by creating a `crontab(5)` file as "/var/spool/cron/crontab.foo" with "`crontab -e`" command.

Here is an example of a `crontab(5)` file.

---

| signal value | signal name          | action  | note                                   |
|--------------|----------------------|---|--|
| 0            | ---                  | no signal is sent (see <code>kill(2)</code> ) | check if process is running            |
| 1            | <code>SIGHUP</code>  | terminate the process                         | disconnected terminal (signal hang up) |
| 2            | <code>SIGINT</code>  | terminate the process                         | interrupt from keyboard (CTRL - C)     |
| 3            | <code>SIGQUIT</code> | terminate the process and dump core           | quit from keyboard (CTRL - \)          |
| 9            | <code>SIGKILL</code> | terminate the process                         | unblockable kill signal                |
| 15           | <code>SIGTERM</code> | terminate the process                         | blockable termination signal           |

Table 9.11: List of frequently used signals for kill command

```
# use /usr/bin/sh to run commands, no matter what /etc/passwd says
SHELL=/bin/sh
# mail any output to paul, no matter whose crontab this is
MAILTO=paul
# Min Hour DayOfMonth Month DayOfWeek command (Day... are OR'ed)
# run at 00:05, every day
5 0 * * * $HOME/bin/daily.job >> $HOME/tmp/out 2>&1
# run at 14:15 on the first of every month -- output mailed to paul
15 14 1 * * $HOME/bin/monthly
# run at 22:00 on weekdays(1-5), annoy Joe. % for newline, last % for cc:
0 22 * * 1-5 mail -s "It's 10pm" joe%Joe,%%Where are your kids?%.%%
23 */2 1 2 * echo "run 23 minutes after 0am, 2am, 4am ..., on Feb 1"
5 4 * * sun echo "run at 04:05 every Sunday"
# run at 03:40 on the first Monday of each month
40 3 1-7 * * [ "$(date +%a)" == "Mon" ] && command -args
```

**Tip**  
For the system not running continuously, install the anacron package to schedule periodic commands at the specified intervals as closely as machine-up-time permits. See [anacron\(8\)](#) and [anacrontab\(5\)](#).

**Tip**  
For scheduled system maintenance scripts, you can run them periodically from root account by placing such scripts in `/etc/cron.hourly/`, `/etc/cron.daily/`, `/etc/cron.weekly/`, or `/etc/cron.monthly/`. Execution timings of these scripts can be customized by `/etc/crontab` and `/etc/anacrontab`.

[Systemd](#) has low level capability to schedule programs to run without `cron` daemon. For example, `/lib/systemd/system` and `/lib/systemd/system/apt-daily.service` set up daily apt download activities. See `systemd.timer(5)`.

9.4.15 Scheduling tasks on event

[Systemd](#) can schedule program not only on the timer event but also on the mount event. See [Section 10.2.3.3](#) and [Section 10.2.3.2](#) for examples.

9.4.16 Alt-SysRq key

Pressing Alt-SysRq (PrtScr) followed by one keys does the magic of rescuing control of the system.

| key following Alt-SysRq | description of action  |
|-------------------------|--|
| k                       | kill all processes on the <b>current virtual console (SAK)</b> |
| s                       | sync all mounted filesystems to avoid data corruption          |
| u                       | remount all mounted filesystems read-only ( <b>u</b> mount)    |
| r                       | restore the keyboard from <b>raw</b> mode after X crashes      |

Table 9.12: List of notable SAK command keys

See more on [Linux kernel user's and administrator's guide » Linux Magic System Request Key Hacks](#)

---

**Tip**

From SSH terminal etc., you can use the Alt-SysRq feature by writing to the `/proc/sysrq-trigger`. For example, `echo s > /proc/sysrq-trigger; echo u > /proc/sysrq-trigger` from the root shell prompt syncs and umounts all mounted filesystems.

---

The current (2021) Debian amd64 Linux kernel has `/proc/sys/kernel/sysrq=438=0b110110110`:

- 2 = 0x2 - enable control of console logging level (ON)
- 4 = 0x4 - enable control of keyboard (SAK, unraw) (ON)
- 8 = 0x8 - enable debugging dumps of processes etc. (OFF)
- 16 = 0x10 - enable sync command (ON)
- 32 = 0x20 - enable remount read-only (ON)
- 64 = 0x40 - enable signaling of processes (term, kill, oom-kill) (OFF)
- 128 = 0x80 - allow reboot/poweroff (ON)
- 256 = 0x100 - allow nicing of all RT tasks (ON)

## 9.5 System maintenance tips

### 9.5.1 Who is on the system?

You can check who is on the system by the following.

- `who(1)` shows who is logged on.
- `w(1)` shows who is logged on and what they are doing.
- `last(1)` shows listing of last logged in user.
- `lastb(1)` shows listing of last bad logged in users.

---

**Tip**

`/var/run/utmp`, and `/var/log/wtmp` hold such user information. See `login(1)` and `utmp(5)`.

---

### 9.5.2 Warning everyone

You can send message to everyone who is logged on to the system with `wall(1)` by the following.

```
$ echo "We are shutting down in 1 hour" | wall
```

### 9.5.3 Hardware identification

For the PCI-like devices ([AGP](#), [PCI-Express](#), [CardBus](#), [ExpressCard](#), etc.), `lspci(8)` (probably with `-nn` option) is a good start for the hardware identification.

Alternatively, you can identify the hardware by reading contents of `/proc/bus/pci/devices` or browsing directory tree under `/sys/bus/pci` (see [Section 1.2.12](#)).

---

| package                     | popcon       | size | description   |
|-----------------------------|--------------|------|---|
| <a href="#">pciutils</a>    | V:258, I:993 | 289  | Linux PCI Utilities: <a href="#">lspci</a> (8)                                    |
| <a href="#">usbutils</a>    | V:83, I:887  | 322  | Linux USB utilities: <a href="#">lsusb</a> (8)                                    |
| <a href="#">nvme-cli</a>    | V:25, I:33   | 2222 | NVMe utilities for Linux: <a href="#">nvme</a> (1)                                |
| <a href="#">pcmciautils</a> | V:4.1, I:6.4 | 92   | PCMCIA utilities for Linux: <a href="#">pccardctl</a> (8)                         |
| <a href="#">scsitools</a>   | V:0.2, I:2.3 | 261  | collection of tools for SCSI hardware management: <a href="#">lsscsi</a> (8)      |
| <a href="#">procinfo</a>    | V:0.4, I:6.2 | 149  | system information obtained from <code>"/proc"</code> : <a href="#">lsdev</a> (8) |
| <a href="#">lshw</a>        | V:13, I:90   | 971  | information about hardware configuration: <a href="#">lshw</a> (1)                |
| <a href="#">discover</a>    | V:26, I:621  | 81   | hardware identification system: <a href="#">discover</a> (8)                      |

Table 9.13: List of hardware identification tools

## 9.5.4 Hardware configuration

Although most of the hardware configuration on modern GUI desktop systems such as GNOME and KDE can be managed through accompanying GUI configuration tools, it is a good idea to know some basics methods to configure them.

For the keyboard and terminal configuration, see [Section 8.2](#) and [Section 8.3](#).

| package                                 | popcon         | size  | description  |
|---|----------------|-------|--|
| <a href="#">console-setup</a>           | V:81, I:974    | 422   | Linux console font and keytable utilities  |
| <a href="#">keyd</a>                    | V:1.1, I:1.3   | 1437  | keyboard key remapping daemon using kernel level input primitives ( <a href="#">evdev</a> , <a href="#">uinput</a> ) |
| <a href="#">keyd-application-mapper</a> | V:0.09, I:0.09 | 34    | keyboard key remapping daemon - application-specific remapper  |
| <a href="#">x11-xserver-utils</a>       | V:309, I:531   | 559   | X server utilities: <a href="#">xset</a> (1), <a href="#">xmodmap</a> (1)  |
| <a href="#">acpid</a>                   | V:55, I:85     | 158   | daemon to manage events delivered by the Advanced Configuration and Power Interface (ACPI)                           |
| <a href="#">acpi</a>                    | V:7, I:79      | 49    | utility to display information on ACPI devices   |
| <a href="#">sleepd</a>                  | V:0.08, I:0.11 | 84    | daemon to put a laptop to sleep during inactivity  |
| <a href="#">hdparm</a>                  | V:117, I:213   | 246   | hard disk access optimization (see <a href="#">Section 9.6.9</a> )   |
| <a href="#">smartmontools</a>           | V:235, I:265   | 2455  | control and monitor storage systems using <a href="#">S.M.A.R.T.</a>   |
| <a href="#">setserial</a>               | V:3.2, I:5.2   | 104   | collection of tools for serial port management   |
| <a href="#">memtest86+</a>              | V:1, I:19      | 12483 | collection of tools for memory hardware management   |
| <a href="#">scsitools</a>               | V:0.2, I:2.3   | 261   | collection of tools for <a href="#">SCSI</a> hardware management   |
| <a href="#">setcd</a>                   | V:0.06, I:0.67 | 33    | compact disc drive access optimization   |
| <a href="#">big-cursor</a>              | I:0.64         | 26    | larger mouse cursors for X   |

Table 9.14: List of hardware configuration tools

Here, [ACPI](#) is a newer framework for the power management system than [APM](#).

### Tip

CPU frequency scaling on modern system is governed by kernel modules such as `acpi_cpufreq`.

## 9.5.5 System and hardware time

The following sets system and hardware time to MM/DD hh:mm, CCYY.



```
# date MMDDhhmmCCYY
# hwclock --utc --systohc
# hwclock --show
```

Times are normally displayed in the local time on the Debian system but the hardware and system time usually use [UTC\(GMT\)](#).

If the hardware time is set to UTC, change the setting to "UTC=yes" in the "/etc/default/rcS".

The following reconfigure the timezone used by the Debian system.

```
# dpkg-reconfigure tzdata
```

If you wish to update system time via network, consider to use the [NTP](#) service with the packages such as `ntp`, `ntpd`, and `chrony`.

---

**Tip**

Under [systemd](#), use `systemd-timesyncd` for the network time synchronization instead. See `systemd-timesyncd(8)`.

---

See the following.

- [Managing Accurate Date and Time HOWTO](#)
- [NTP Public Services Project](#)
- The `ntp-doc` package

---

**Tip**

`ntptrace(8)` in the `ntp` package can trace a chain of NTP servers back to the primary source.

---

## 9.5.6 The sound infrastructure

Device drivers for sound cards for current Linux are provided by [Advanced Linux Sound Architecture \(ALSA\)](#). ALSA provides emulation mode for previous [Open Sound System \(OSS\)](#) for compatibility.

Application softwares may be configured not only to access sound devices directly but also to access them via some standardized sound server system. Currently, PulseAudio, JACK, and PipeWire are used as sound server system. See [Debian wiki page on Sound](#) for the latest situation.

There is usually a common sound engine for each popular desktop environment. Each sound engine used by the application can choose to connect to different sound servers.

---

**Tip**

Use `"cat /dev/urandom > /dev/audio"` or `speaker-test(1)` to test speaker (^C to stop).

---

---

**Tip**

If you can not get sound, your speaker may be connected to a muted output. Modern sound system has many outputs. `alsamixer(1)` in the `alsa-utils` package is useful to configure volume and mute settings.

---

| package                         | popcon       | size | description  |
|---------------------------------|--------------|------|--|
| <a href="#">alsa-utils</a>      | V:340, I:459 | 2696 | utilities for configuring and using ALSA   |
| <a href="#">oss-compat</a>      | V:0.6, I:9.7 | 21   | OSS compatibility under ALSA preventing "/dev/dsp not found" errors                                      |
| <a href="#">pipewire</a>        | V:321, I:365 | 135  | <a href="#">audio and video processing engine multimedia server</a> - metapackage                        |
| <a href="#">pipewire-bin</a>    | V:328, I:365 | 2219 | <a href="#">audio and video processing engine multimedia server</a> - audio server and CLI programs      |
| <a href="#">pipewire-alsa</a>   | V:169, I:234 | 190  | <a href="#">audio and video processing engine multimedia server</a> - audio server to replace ALSA       |
| <a href="#">pipewire-pulse</a>  | V:289, I:337 | 53   | <a href="#">audio and video processing engine multimedia server</a> - audio server to replace PulseAudio |
| <a href="#">pulseaudio</a>      | V:157, I:182 | 6602 | <a href="#">PulseAudio</a> server  |
| <a href="#">libpulse0</a>       | V:441, I:577 | 969  | <a href="#">PulseAudio</a> client library  |
| <a href="#">jackd</a>           | V:2, I:14    | 8    | <a href="#">JACK Audio Connection Kit. (JACK)</a> server (low latency)                                   |
| <a href="#">libjack0</a>        | V:1.8, I:8.8 | 329  | <a href="#">JACK Audio Connection Kit. (JACK)</a> library (low latency)                                  |
| <a href="#">libphonon4qt5-4</a> | V:22, I:50   | 572  | <a href="#">Phonon</a> : KDE sound engine  |

Table 9.15: List of sound packages

| environment                                      | command                                  |
|--|--|
| The Linux console                                | <code>setterm -powersave off</code>      |
| The X Window (turning off screensaver)           | <code>xset s off</code>                  |
| The X Window (disabling dpms)                    | <code>xset -dpms</code>                  |
| The X Window (GUI configuration of screen saver) | <code>xscreensaver-command -prefs</code> |

Table 9.16: List of commands for disabling the screen saver

## 9.5.7 Disabling the screen saver

For disabling the screen saver, use following commands.

## 9.5.8 Disabling beep sounds

One can always unplug the PC speaker to disable beep sounds. Removing `pcspkr` kernel module does this for you. The following prevents the `readline(3)` program used by `bash(1)` to beep when encountering an alert character (ASCII=7).

```
$ echo "set bell-style none">> ~/.inputrc
```

## 9.5.9 Memory usage

There are 2 resources available for you to get the memory usage situation.

- The kernel boot message in the `/var/log/dmesg` contains the total exact size of available memory.
- `free(1)` and `top(1)` display information on memory resources on the running system.

Here is an example.

```
# grep '\] Memory' /var/log/dmesg
[  0.004000] Memory: 990528k/1016784k available (1975k kernel code, 25868k reserved, 931k ↵
data, 296k init)
$ free -k
              total        used         free      shared    buffers     cached
Mem:          997184        976928         20256           0        129592        171932
-/+ buffers/cache:        675404         321780
Swap:         4545576            4         4545572
```

You may be wondering "dmesg tells me a free of 990 MB, and `free -k` says 320 MB is free. More than 600 MB missing ...".

Do not worry about the large size of "used" and the small size of "free" in the "Mem:" line, but read the one under them (675404 and 321780 in the example above) and relax.

For my MacBook with 1GB=1048576k DRAM (video system steals some of this), I see the following.

| report              | size                             |
|---------------------|----------------------------------|
| Total size in dmesg | 1016784k = 1GB - 31792k          |
| Free in dmesg       | 990528k                          |
| Total under shell   | 997184k                          |
| Free under shell    | 20256k (but effectively 321780k) |

Table 9.17: List of memory sizes reported

## 9.5.10 System security and integrity check

Poor system maintenance may expose your system to external exploitation.

For system security and integrity check, you should start with the following.

- The `debsums` package, see `debsums(1)` and Section [2.5.2](#).

- The `chkrootkit` package, see `chkrootkit(1)`.
- The `clamav` package family, see `clamscan(1)` and `freshclam(1)`.
- [Debian security FAQ](#).
- [Securing Debian Manual](#).

| package                    | popcon         | size  | description  |
|----------------------------|----------------|-------|--|
| <a href="#">logcheck</a>   | V:4.8, I:5.9   | 120   | daemon to mail anomalies in the system logfiles to the administrator |
| <a href="#">debsums</a>    | V:4, I:30      | 108   | utility to verify installed package files against MD5 checksums      |
| <a href="#">chkrootkit</a> | V:9, I:14      | 987   | <a href="#">rootkit</a> detector                                     |
| <a href="#">clamav</a>     | V:9, I:39      | 39204 | anti-virus utility for Unix - command-line interface                 |
| <a href="#">tiger</a>      | V:1.2, I:1.5   | 7800  | report system security vulnerabilities                               |
| <a href="#">tripwire</a>   | V:1.3, I:1.6   | 5060  | file and directory integrity checker                                 |
| <a href="#">john</a>       | V:1.2, I:7.3   | 469   | active password cracking tool  |
| <a href="#">aide</a>       | V:2.0, I:2.4   | 324   | Advanced Intrusion Detection Environment - static binary             |
| <a href="#">integrit</a>   | V:0.10, I:0.18 | 2771  | file integrity verification program                                  |
| <a href="#">crack</a>      | V:0.08, I:0.58 | 153   | password guessing program  |

Table 9.18: List of tools for system security and integrity check

Here is a simple script to check for typical world writable incorrect file permissions.

```
# find / -perm 777 -a \! -type s -a \! -type l -a \! \! -type d -a -perm 1777 \)
```



#### Caution

Since the `debsums` package uses [MD5](#) checksums stored locally, it can not be fully trusted as the system security audit tool against malicious attacks.

## 9.6 Data storage tips

Booting your system as the Linux live system (see [Section 3.2.2](#) and [Section 3.2.3](#)) makes it easy for you to reconfigure data storage on the installed system.

#### Note

Statements on hard disk ([HDD](#)) are applicable to other storage devices such as [SSD](#) / [USB flash drive](#) / [Memory card](#) / ... . Replace device names in examples such as `/dev/sda` with applicable device names `/dev/nvme0`, `/dev/mmcblk0`, ... .

You may need to `umount(8)` some devices manually from the command line before operating on them if they are automatically mounted by the GUI desktop system.

### 9.6.1 Disk space usage

The disk space usage can be evaluated by programs provided by the `mount`, `coreutils`, and `xdu` packages:

- `mount(8)` reports all mounted filesystems (= disks).
- `df(1)` reports the disk space usage for the file system.
- `du(1)` reports the disk space usage for the directory tree.

---

**Tip**

You can feed the output of `du(8)` to `xdu(1x)` to produce its graphical and interactive presentation with `"du -k . |xdu"`, `"sudo du -k -x / |xdu"`, etc.

---

## 9.6.2 Disk partition configuration

For [disk partition](#) configuration, although `fdisk(8)` has been considered standard, `parted(8)` deserves some attention. "Disk partitioning data", "partition table", "partition map", and "disk label" are all synonyms.

Older PCs use the classic [Master Boot Record \(MBR\)](#) scheme to hold [disk partitioning](#) data in the first sector, i.e., [LBA](#) sector 0 (512 bytes).

Recent PCs with [Unified Extensible Firmware Interface \(UEFI\)](#), including Intel-based Macs, use [GUID Partition Table \(GPT\)](#) scheme to hold [disk partitioning](#) data not in the first sector.

Although `fdisk(8)` has been standard for the disk partitioning tool, `parted(8)` is replacing it.

| package                    | popcon        | size | description  |
|----------------------------|---------------|------|--|
| <a href="#">util-linux</a> | V:917, I:1000 | 4658 | miscellaneous system utilities including <code>fdisk(8)</code> and <code>cdisk(8)</code> |
| <a href="#">parted</a>     | V:449, I:568  | 122  | GNU Parted disk partition resizing program   |
| <a href="#">gparted</a>    | V:12, I:87    | 2313 | GNOME partition editor based on <code>libparted</code>                                   |
| <a href="#">gdisk</a>      | V:20, I:277   | 967  | partition editor for the GPT/MBR hybrid disk   |
| <a href="#">kpartx</a>     | V:17, I:26    | 76   | program to create device mappings for partitions   |

Table 9.19: List of disk partition management packages


**Caution**

Although `parted(8)` claims to create and to resize filesystem too, it is safer to do such things using best maintained specialized tools such as `mkfs(8)` (`mkfs.msdos(8)`, `mkfs.ext2(8)`, `mkfs.ext3(8)`, `mkfs.ext4(8)`, ...) and `resize2fs(8)`.

---

**Note**

In order to switch between [GPT](#) and [MBR](#), you need to erase first few blocks of disk contents directly (see [Section 9.8.6](#)) and use `"parted /dev/sdx mklabel gpt"` or `"parted /dev/sdx mklabel msdos"` to set it. Please note "msdos" is use here for [MBR](#).

---

## 9.6.3 Accessing partition using UUID

Although reconfiguration of your partition or activation order of removable storage media may yield different names for partitions, you can access them consistently. This is also helpful if you have multiple disks and your BIOS/UEFI doesn't give them consistent device names.

- `mount(8)` with `"-U"` option can mount a block device using [UUID](#), instead of using its file name such as `"/dev/sda3"`.
-

- `/etc/fstab` (see `fstab(5)`) can use [UUID](#).
- Boot loaders (Section [3.1.2](#)) may use [UUID](#) too.

---

**Tip**

You can probe [UUID](#) of a block special device with `blkid(8)`.

You can also probe `UUID` and other information with `lsblk -f`.

---

## 9.6.4 LVM2

LVM2 is a [logical volume manager](#) for the Linux kernel. With LVM2, disk partitions can be created on logical volumes instead of the physical harddisks.

LVM requires the following.

- device-mapper support in the Linux kernel (default for Debian kernels)
- the userspace device-mapper support library (`libdevmapper*` package)
- the userspace LVM2 tools (`lvm2` package)

Please start learning LVM2 from the following manpages.

- `lvm(8)`: Basics of LVM2 mechanism (list of all LVM2 commands)
- `lvm.conf(5)`: Configuration file for LVM2
- `lvs(8)`: Report information about logical volumes
- `vgs(8)`: Report information about volume groups
- `pvs(8)`: Report information about physical volumes

## 9.6.5 Filesystem configuration

For [ext4](#) filesystem, the `e2fsprogs` package provides the following.

- `mkfs.ext4(8)` to create new [ext4](#) filesystem
- `fsck.ext4(8)` to check and to repair existing [ext4](#) filesystem
- `tune2fs(8)` to configure superblock of [ext4](#) filesystem
- `debugfs(8)` to debug [ext4](#) filesystem interactively. (It has `undeL` command to recover deleted files.)

The `mkfs(8)` and `fsck(8)` commands are provided by the `e2fsprogs` package as front-ends to various filesystem dependent programs (`mkfs.fstype` and `fsck.fstype`). For [ext4](#) filesystem, they are `mkfs.ext4(8)` and `fsck.ext4(8)` (they are symlinked to `mke2fs(8)` and `e2fsck(8)`).

Similar commands are available for each filesystem supported by Linux.

---

**Tip**

[Ext4](#) filesystem is the default filesystem for the Linux system and strongly recommended to use it unless you have some specific reasons not to.

[Btrfs](#) status can be found at [Debian wiki on btrfs](#) and [kernel.org wiki on btrfs](#). It is expected to be the next default filesystem after the `ext4` filesystem.

Some tools allow access to filesystem without Linux kernel support (see Section [9.8.2](#)).

---

| package                        | popcon       | size | description   |
|--------------------------------|--------------|------|---|
| <a href="#">e2fsprogs</a>      | V:822, I:997 | 1543 | utilities for the <a href="#">ext2/ext3/ext4</a> filesystems  |
| <a href="#">btrfs-progs</a>    | V:51, I:78   | 5250 | utilities for the <a href="#">Btrfs</a> filesystem  |
| <a href="#">reiserfsprogs</a>  | V:11, I:22   | 473  | utilities for the <a href="#">Reiserfs</a> filesystem   |
| <a href="#">zfsutils-linux</a> | V:33, I:33   | 1895 | utilities for the <a href="#">OpenZFS</a> filesystem  |
| <a href="#">dosfstools</a>     | V:258, I:565 | 310  | utilities for the <a href="#">FAT</a> filesystem. (Microsoft: MS-DOS, Windows)                          |
| <a href="#">exfatprogs</a>     | V:34, I:460  | 558  | utilities for the <a href="#">exFAT</a> filesystem maintained by Samsung.                               |
| <a href="#">exfat-fuse</a>     | V:2, I:45    | 73   | read/write <a href="#">exFAT</a> filesystem (Microsoft) driver for FUSE.                                |
| <a href="#">xfsprogs</a>       | V:41, I:87   | 4382 | utilities for the <a href="#">XFS</a> filesystem. (SGI: IRIX)   |
| <a href="#">ntfs-3g</a>        | V:201, I:513 | 1501 | read/write <a href="#">NTFS</a> filesystem (Microsoft: Windows NT, ...) driver for FUSE.                |
| <a href="#">jfsutils</a>       | V:0.4, I:6.9 | 1104 | utilities for the <a href="#">JFS</a> filesystem. (IBM: AIX, OS/2)                                      |
| <a href="#">xorriso</a>        | V:14, I:64   | 378  | utilities for the <a href="#">ISO-9660</a> filesystem and CD/DVD writing from <a href="#">libburnia</a> |
| <a href="#">wodim</a>          | V:7, I:89    | 898  | command line CD/DVD writing tool from <a href="#">cdrkit</a>  |
| <a href="#">genisoimage</a>    | V:17, I:160  | 1567 | command line <a href="#">ISO-9660</a> filesystem tool from <a href="#">cdrkit</a>                       |
| <a href="#">reiser4progs</a>   | V:0.1, I:1.2 | 1367 | utilities for the <a href="#">Reiser4</a> filesystem  |
| <a href="#">hfsprogs</a>       | V:0.3, I:3.2 | 394  | utilities for <a href="#">HFS</a> and <a href="#">HFS Plus</a> filesystem. (Apple: Mac OS)              |
| <a href="#">zerofree</a>       | V:7, I:120   | 30   | program to zero free blocks from ext2/3/4 filesystems   |

Table 9.20: List of filesystem management packages

### 9.6.6 Filesystem creation and integrity check

The `mkfs(8)` command creates the filesystem on a Linux system. The `fsck(8)` command provides the filesystem integrity check and repair on a Linux system.

Debian now defaults to no periodic `fsck` after filesystem creation.



#### Caution

It is generally not safe to run `fsck` on **mounted filesystems**.

#### Tip

You can run the `fsck(8)` command safely on all filesystems including root filesystem on reboot by setting "enable\_periodic\_fsck" in `/etc/mke2fs.conf` and the max mount count to 0 using `tune2fs -c0 /dev/partition_name`. See `mke2fs.conf(5)` and `tune2fs(8)`.

Check files in `/var/log/fsck/` for the result of the `fsck(8)` command run from the boot script.

### 9.6.7 Optimization of filesystem by mount options

The basic static filesystem configuration is given by `/etc/fstab`. For example,

```
«file system»      «mount point» «type» «options»      «dump» «pass»
proc               /proc         proc   defaults          0 0
UUID=709cbe4c-80c1-56db-8ab1-dbce3146d2f7 /             ext4    errors=remount-ro 0 1
UUID=817bae6b-45d2-5aca-4d2a-1267ab46ac23 none           swap    sw                0 0
/dev/scd0          /media/cdrom0 udf,iso9660 user,noauto      0 0
```

#### Tip

[UUID](#) (see Section 9.6.3) may be used to identify a block device instead of normal block device names such as `/dev/sda1`, `/dev/sda2`, ...

Since Linux 2.6.30, the kernel defaults to the behavior provided by "relatime" option.  
See `fstab(5)` and `mount(8)`.

### 9.6.8 Optimization of filesystem via superblock

Characteristics of a filesystem can be optimized via its superblock using the `tune2fs(8)` command.

- Execution of "`sudo tune2fs -l /dev/sda1`" displays the contents of the filesystem superblock on `/dev/sda1`.
- Execution of "`sudo tune2fs -c 50 /dev/sda1`" changes frequency of filesystem checks (`fsck` execution during boot-up) to every 50 boots on `/dev/sda1`.
- Execution of "`sudo tune2fs -j /dev/sda1`" adds journaling capability to the filesystem, i.e. filesystem conversion from `ext2` to `ext3` on `/dev/sda1`. (Do this on the unmounted filesystem.)
- Execution of "`sudo tune2fs -O extents,uninit_bg,dir_index /dev/sda1 && fsck -pf /dev/sda1`" converts it from `ext3` to `ext4` on `/dev/sda1`. (Do this on the unmounted filesystem.)

---

#### Tip

Despite its name, `tune2fs(8)` works not only on the `ext2` filesystem but also on the `ext3` and `ext4` filesystems.

---

### 9.6.9 Optimization of hard disk



#### Warning

Please check your hardware and read manpage of `hdparm(8)` before playing with hard disk configuration because this may be quite dangerous for the data integrity.

---

You can test disk access speed of a hard disk, e.g. `/dev/sda`, by "`hdparm -tT /dev/sda`". For some hard disk connected with (E)IDE, you can speed it up with "`hdparm -q -c3 -d1 -u1 -m16 /dev/sda`" by enabling the "(E)IDE 32-bit I/O support", enabling the "using\_dma flag", setting "interrupt-unmask flag", and setting the "multiple 16 sector I/O" (dangerous!).

You can test write cache feature of a hard disk, e.g. `/dev/sda`, by "`hdparm -W /dev/sda`". You can disable its write cache feature with "`hdparm -W 0 /dev/sda`".

You may be able to read badly pressed CDROMs on modern high speed CD-ROM drive by slowing it down with "`setcd -x 2`".

### 9.6.10 Optimization of solid state drive

[Solid state drive \(SSD\)](#) is auto detected now.

Reduce unnecessary disk accesses to prevent disk wear out by mounting "`tmpfs`" on volatile data path in `/etc/fstab`.

### 9.6.11 Using SMART to predict hard disk failure

You can monitor and log your hard disk which is compliant to [SMART](#) with the `smartd(8)` daemon.

1. Enable [SMART](#) feature in [BIOS](#).
-



2. Install the `smartmontools` package.
3. Identify your hard disk drives by listing them with `df(1)`.
  - Let's assume a hard disk drive to be monitored as `/dev/sda`.
4. Check the output of `smartctl -a /dev/sda` to see if [SMART](#) feature is actually enabled.
  - If not, enable it by `smartctl -s on -a /dev/sda`.
5. Enable `smartd(8)` daemon to run by the following.
  - uncomment `start_smartd=yes` in the `/etc/default/smartmontools` file.
  - restart the `smartd(8)` daemon by `sudo systemctl restart smartmontools`.

---

**Tip**

The `smartd(8)` daemon can be customized with the `/etc/smartd.conf` file including how to be notified of warnings.

---

### 9.6.12 Specify temporary storage directory via \$TMPDIR

Applications create temporary files normally under the temporary storage directory `/tmp`. If `/tmp` does not provide enough space, you can specify such temporary storage directory via the `$TMPDIR` variable for well-behaving programs.

### 9.6.13 Expansion of usable storage space via LVM

For partitions created on [Logical Volume Manager \(LVM\)](#) (Linux feature) at install time, they can be resized easily by concatenating extents onto them or truncating extents from them over multiple storage devices without major system reconfiguration.

### 9.6.14 Expansion of usable storage space by mounting another partition

If you have an empty partition (e.g., `/dev/sdx`), you can format it with `mkfs.ext4(1)` and `mount(8)` it to a directory where you need more space. (You need to copy original data contents.)

```
$ sudo mv work-dir old-dir
$ sudo mkfs.ext4 /dev/sdx
$ sudo mount -t ext4 /dev/sdx work-dir
$ sudo cp -a old-dir/* work-dir
$ sudo rm -rf old-dir
```

---

**Tip**

You may alternatively mount an empty disk image file (see [Section 9.7.5](#)) as a loop device (see [Section 9.7.3](#)). The actual disk usage grows with the actual data stored.

---

### 9.6.15 Expansion of usable storage space by bind-mounting another directory

If you have an empty directory (e.g., `/path/to/emp-dir`) on another partition with usable space, you can `mount(8)` it with `--bind` option to a directory (e.g., `work-dir`) where you need more space.

```
$ sudo mount --bind /path/to/emp-dir work-dir
```

---

### 9.6.16 Expansion of usable storage space by overlay-mounting another directory

If you have usable space in another partition (e.g., `/path/to/empty` and `/path/to/work`), you can create a directory in it and stack that on to an old directory (e.g., `/path/to/old`) where you need space using the [OverlayFS](#) for Linux kernel 3.18 or newer (Debian Stretch 9.0 or newer).

```
$ sudo mount -t overlay overlay \
  -olowerdir=/path/to/old-dir,upperdir=/path/to/empty,workdir=/path/to/work
```

Here, `/path/to/empty` and `/path/to/work` should be on the RW-enabled partition to write on `/path/to/old`.

### 9.6.17 Expansion of usable storage space using symlink



#### Caution

This is a deprecated method. Some software may not function well with "symlink to a directory". Instead, use the "mounting" approaches described in the above.

---

If you have an empty directory (e.g., `/path/to/emp-dir`) in another partition with usable space, you can create a symlink to the directory with `ln(8)`.

```
$ sudo mv work-dir old-dir
$ sudo mkdir -p /path/to/emp-dir
$ sudo ln -sf /path/to/emp-dir work-dir
$ sudo cp -a old-dir/* work-dir
$ sudo rm -rf old-dir
```



#### Warning

Do not use "symlink to a directory" for directories managed by the system such as `/opt`. Such a symlink may be overwritten when the system is upgraded.

---

## 9.7 The disk image

Here, we discuss manipulations of the disk image.

### 9.7.1 Making the disk image file

The disk image file, `disk.img`, of an unmounted device, e.g., the second SCSI or serial ATA drive `/dev/sdb`, can be made by one of the following.

```
# dd if=/dev/sdb of=disk.img; sync
```

```
# cp /dev/sdb disk.img ; sync
```

```
# cat /dev/sdb > disk.img ; sync
```

The disk image of the traditional PC's [master boot record \(MBR\)](#) (see Section [9.6.2](#)) which reside on the first sector on the primary IDE disk can be made by using `dd(1)` by the following.

---

```
# dd if=/dev/sda of=mbr.img bs=512 count=1
# dd if=/dev/sda of=mbr-nopart.img bs=446 count=1
# dd if=/dev/sda of=mbr-part.img skip=446 bs=1 count=66
```

- "mbr.img": The MBR with the partition table
- "mbr-nopart.img": The MBR without the partition table
- "mbr-part.img": The partition table of the MBR only

If you are making an image of a disk partition of the original disk, substitute `/dev/sda` with `/dev/sda1` etc.

## 9.7.2 Writing directly to the disk

The disk image file, "disk.img" can be written to an unmounted device, e.g., the second SCSI drive `/dev/sdb` with matching size, by one of the following.

```
# dd if=disk.img of=/dev/sdb ; sync
```

```
# cp disk.img /dev/sdb ; sync
```

```
# cat disk.img >/dev/sdb ; sync
```

Similarly, the disk partition image file, "partition.img" can be written to an unmounted partition, e.g., the first partition of the second SCSI drive `/dev/sdb1` with matching size, by the following.

```
# dd if=partition.img of=/dev/sdb1 ; sync
```

## 9.7.3 Mounting the disk image file

The disk image "partition.img" containing a single partition image can be mounted and unmounted by using the [loop device](#) as follows.

```
# losetup --show -f partition.img
/dev/loop0
# mkdir -p /mnt/loop0
# mount -t auto /dev/loop0 /mnt/loop0
...hack...hack...hack
# umount /dev/loop0
# losetup -d /dev/loop0
```

This can be simplified as follows.

```
# mkdir -p /mnt/loop0
# mount -t auto -o loop partition.img /mnt/loop0
...hack...hack...hack
# umount partition.img
```

Each partition of the disk image "disk.img" containing multiple partitions can be mounted by using the [loop device](#).

```
# losetup --show -f -P disk.img
/dev/loop0
# ls -l /dev/loop0*
brw-rw---- 1 root disk  7,  0 Apr  2 22:51 /dev/loop0
brw-rw---- 1 root disk 259, 12 Apr  2 22:51 /dev/loop0p1
```

```
brw-rw---- 1 root disk 259, 13 Apr  2 22:51 /dev/loop0p14
brw-rw---- 1 root disk 259, 14 Apr  2 22:51 /dev/loop0p15
# fdisk -l /dev/loop0
Disk /dev/loop0: 2 GiB, 2147483648 bytes, 4194304 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 6A1D9E28-C48C-2144-91F7-968B3CBC9BD1

Device          Start      End Sectors  Size Type
/dev/loop0p1    262144    4192255 3930112    1.9G Linux root (x86-64)
/dev/loop0p14    2048      8191     6144     3M BIOS boot
/dev/loop0p15    8192    262143   253952    124M EFI System

Partition table entries are not in disk order.
# mkdir -p /mnt/loop0p1
# mkdir -p /mnt/loop0p15
# mount -t auto /dev/loop0p1 /mnt/loop0p1
# mount -t auto /dev/loop0p15 /mnt/loop0p15
# mount |grep loop
/dev/loop0p1 on /mnt/loop0p1 type ext4 (rw,relatime)
/dev/loop0p15 on /mnt/loop0p15 type vfat (rw,relatime,fmask=0002,dmask=0002,allow_utime ←
=0020,codepage=437,iocharset=ascii,shortname=mixed,utf8,errors=remount-ro)
...hack...hack...hack
# umount /dev/loop0p1
# umount /dev/loop0p15
# losetup -d /dev/loop0
```

Alternatively, similar effects can be done by using the [device mapper](#) devices created by `kpartx(8)` from the `kpartx` package as follows.

```
# kpartx -a -v disk.img
add map loop0p1 (253:0): 0 3930112 linear 7:0 262144
add map loop0p14 (253:1): 0 6144 linear 7:0 2048
add map loop0p15 (253:2): 0 253952 linear 7:0 8192
# fdisk -l /dev/loop0
Disk /dev/loop0: 2 GiB, 2147483648 bytes, 4194304 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 6A1D9E28-C48C-2144-91F7-968B3CBC9BD1

Device          Start      End Sectors  Size Type
/dev/loop0p1    262144    4192255 3930112    1.9G Linux root (x86-64)
/dev/loop0p14    2048      8191     6144     3M BIOS boot
/dev/loop0p15    8192    262143   253952    124M EFI System

Partition table entries are not in disk order.
# ls -l /dev/mapper/
total 0
crw----- 1 root root 10, 236 Apr  2 22:45 control
lrwxrwxrwx 1 root root      7 Apr  2 23:19 loop0p1 -> ../dm-0
lrwxrwxrwx 1 root root      7 Apr  2 23:19 loop0p14 -> ../dm-1
lrwxrwxrwx 1 root root      7 Apr  2 23:19 loop0p15 -> ../dm-2
# mkdir -p /mnt/loop0p1
# mkdir -p /mnt/loop0p15
# mount -t auto /dev/mapper/loop0p1 /mnt/loop0p1
# mount -t auto /dev/mapper/loop0p15 /mnt/loop0p15
# mount |grep loop
/dev/loop0p1 on /mnt/loop0p1 type ext4 (rw,relatime)
```

```
/dev/loop0p15 on /mnt/loop0p15 type vfat (rw,relatime,fmask=0002,dmask=0002,allow_utime ↵
=0020,codepage=437,iocharset=ascii,shortname=mixed,utf8,errors=remount-ro)
...hack...hack...hack
# umount /dev/mapper/loop0p1
# umount /dev/mapper/loop0p15
# kpartx -d disk.img
```

### 9.7.4 Cleaning a disk image file

A disk image file, "disk.img" can be cleaned of all removed files into clean sparse image "new.img" by the following.

```
# mkdir old; mkdir new
# mount -t auto -o loop disk.img old
# dd bs=1 count=0 if=/dev/zero of=new.img seek=5G
# mount -t auto -o loop new.img new
# cd old
# cp -a --sparse=always ./ ../new/
# cd ..
# umount new.img
# umount disk.img
```

If "disk.img" is in ext2, ext3 or ext4, you can also use zerofree(8) from the zerofree package as follows.

```
# losetup --show -f disk.img
/dev/loop0
# zerofree /dev/loop0
# cp --sparse=always disk.img new.img
# losetup -d /dev/loop0
```

### 9.7.5 Making the empty disk image file

The empty disk image "disk.img" which can grow up to 5GiB can be made using dd(1) as follows.

```
$ dd bs=1 count=0 if=/dev/zero of=disk.img seek=5G
```

Instead of using dd(1), specialized fallocate(8) may be used here.

You can create an ext4 filesystem on this disk image "disk.img" using the [loop device](#) as follows.

```
# losetup --show -f disk.img
/dev/loop0
# mkfs.ext4 /dev/loop0
...hack...hack...hack
# losetup -d /dev/loop0
$ du --apparent-size -h disk.img
5.0G disk.img
$ du -h disk.img
83M disk.img
```

For "disk.img", its file size is 5.0 GiB and its actual disk usage is mere 83MiB. This discrepancy is possible since [ext4](#) can hold [sparse file](#).

---

#### Tip

The actual disk usage of [sparse file](#) grows with data which are written to it.

---

Using similar operation on devices created by the [loop device](#) or the [device mapper](#) devices as Section 9.7.3, you can partition this disk image "disk.img" using parted(8) or fdisk(8), and can create filesystem on it using mkfs.ext4(8), mkswap(8), etc.

---

## 9.7.6 Making the ISO9660 image file

---

**Tip**

Both `genisoimage(1)` provided by [cdrkit](#) and `xorrisofs(1)` provided by [Libburnia](#) share the same command syntax except for the command name.

---

The [ISO9660](#) image file, "cd.iso", from the source directory tree at "source\_directory" can be made using `genisoimage(1)` provided by [cdrkit](#) by the following.

```
# genisoimage -r -J -T -V volume_id -o cd.iso source_directory
```

Similarly, the bootable ISO9660 image file, "cdboot.iso", can be made from debian-installer like directory tree at "source\_directory" by the following.

```
# genisoimage -r -o cdboot.iso -V volume_id \  
-b isolinux/isolinux.bin -c isolinux/boot.cat \  
-no-emul-boot -boot-load-size 4 -boot-info-table source_directory
```

Here [Isolinux boot loader](#) (see Section 3.1.2) is used for booting.

You can calculate the md5sum value and make the ISO9660 image directly from the CD-ROM device as follows.

```
$ isoinfo -d -i /dev/cdrom  
CD-ROM is in ISO 9660 format  
...  
Logical block size is: 2048  
Volume size is: 23150592  
...  
# dd if=/dev/cdrom bs=2048 count=23150592 conv=notrunc,noerror | md5sum  
# dd if=/dev/cdrom bs=2048 count=23150592 conv=notrunc,noerror > cd.iso
```

**Warning**

You must carefully avoid ISO9660 filesystem read ahead bug of Linux as above to get the right result.

---

## 9.7.7 Writing directly to the CD/DVD-R/RW

---

**Tip**

DVD is only a large CD to `wodim(1)` provided by [cdrkit](#) and `xorrecord(1)` provided by [Libburnia](#). These commands share the same command syntax except for the command name.

---

You can find a usable device by the following.

```
# wodim --devices
```

Then the blank CD-R is inserted to the CD drive, and the ISO9660 image file, "cd.iso" is written to this device, e.g., "/dev/sda", using `wodim(1)` by the following.

```
# wodim -v -eject dev=/dev/sda cd.iso
```

If CD-RW is used instead of CD-R, do this instead by the following.

---

```
# wodim -v -eject blank=fast dev=/dev/sda cd.iso
```

---

**Tip**

If your desktop system mounts CDs automatically, unmount it by "sudo umount /dev/sda" from console before using wodim(1).

---

## 9.7.8 Mounting the ISO9660 image file

If "cd.iso" contains an ISO9660 image, then the following manually mounts it to "/cdrom".

```
# mount -t iso9660 -o ro,loop cd.iso /cdrom
```

---

**Tip**

Modern desktop system may mount removable media such as ISO9660 formatted CD automatically (see Section 10.1.7).

---

## 9.8 The binary data

Here, we discuss direct manipulations of the binary data on storage media.

### 9.8.1 Viewing and editing binary data

The most basic viewing method of binary data is to use "od -t x1" command.

| package                         | popcon                         | size                  | description  |
|---------------------------------|--------------------------------|-----------------------|--|
| <a href="#">coreutils</a>       | <a href="#">V:911, I:1000</a>  | <a href="#">17994</a> | basic package which has od(1) to dump files (HEX, ASCII, OCTAL, ...)   |
| <a href="#">bsdmainutils</a>    | <a href="#">V:4, I:136</a>     | <a href="#">17</a>    | utility package which has hd(1) to dump files (HEX, ASCII, OCTAL, ...) |
| <a href="#">hexedit</a>         | <a href="#">V:0.8, I:7.9</a>   | <a href="#">70</a>    | binary editor and viewer (HEX, ASCII)                                  |
| <a href="#">bless</a>           | <a href="#">V:0.2, I:1.4</a>   | <a href="#">924</a>   | full featured hexadecimal editor (GNOME)                               |
| <a href="#">okteta</a>          | <a href="#">V:1, I:12</a>      | <a href="#">1589</a>  | full featured hexadecimal editor (KDE4)                                |
| <a href="#">ncurses-hexedit</a> | <a href="#">V:0.1, I:1.2</a>   | <a href="#">130</a>   | binary editor and viewer (HEX, ASCII, EBCDIC)                          |
| <a href="#">beav</a>            | <a href="#">V:0.04, I:0.33</a> | <a href="#">137</a>   | binary editor and viewer (HEX, ASCII, EBCDIC, OCTAL, ...)              |

Table 9.21: List of packages which view and edit binary data

---

**Tip**

HEX is used as an acronym for [hexadecimal](#) format with [radix](#) 16. OCTAL is for [octal](#) format with [radix](#) 8. ASCII is for [American Standard Code for Information Interchange](#), i.e., normal English text code. EBCDIC is for [Extended Binary Coded Decimal Interchange Code](#) used on [IBM mainframe](#) operating systems.

---

## 9.8.2 Manipulating files without mounting disk

There are tools to read and write files without mounting disk.

| package                  | popcon                       | size                | description  |
|--------------------------|------------------------------|---------------------|--|
| <a href="#">mtools</a>   | <a href="#">V:7, I:53</a>    | <a href="#">400</a> | utilities for MSDOS files without mounting them        |
| <a href="#">hfsutils</a> | <a href="#">V:0.2, I:2.8</a> | <a href="#">178</a> | utilities for HFS and HFS+ files without mounting them |

Table 9.22: List of packages to manipulate files without mounting disk

## 9.8.3 Data redundancy

Software [RAID](#) systems offered by the Linux kernel provide data redundancy in the kernel filesystem level to achieve high levels of storage reliability.

There are tools to add data redundancy to files in application program level to achieve high levels of storage reliability, too.

| package                  | popcon                         | size                 | description  |
|--------------------------|--------------------------------|----------------------|--|
| <a href="#">par2</a>     | <a href="#">V:9, I:116</a>     | <a href="#">297</a>  | Parity Archive Volume Set, for checking and repair of files            |
| <a href="#">dvdaster</a> | <a href="#">V:0.1, I:1.2</a>   | <a href="#">1422</a> | data loss/scratch/aging protection for CD/DVD media                    |
| <a href="#">dvbackup</a> | <a href="#">V:0.01, I:0.04</a> | <a href="#">413</a>  | backup tool using MiniDV camcorders (providing <code>rsync(1)</code> ) |

Table 9.23: List of tools to add data redundancy to files

## 9.8.4 Data file recovery and forensic analysis

There are tools for data file recovery and forensic analysis.

| package                       | popcon                         | size                 | description   |
|-------------------------------|--------------------------------|----------------------|---|
| <a href="#">testdisk</a>      | <a href="#">V:2, I:25</a>      | <a href="#">2275</a> | utilities for partition scan and disk recovery            |
| <a href="#">magicrescue</a>   | <a href="#">V:0.2, I:1.7</a>   | <a href="#">257</a>  | utility to recover files by looking for magic bytes       |
| <a href="#">scalpel</a>       | <a href="#">V:0.2, I:2.2</a>   | <a href="#">89</a>   | frugal, high performance file carver                      |
| <a href="#">myrescue</a>      | <a href="#">V:0.2, I:1.8</a>   | <a href="#">81</a>   | rescue data from damaged harddisks                        |
| <a href="#">extundelete</a>   | <a href="#">V:0.5, I:7.3</a>   | <a href="#">152</a>  | utility to undelete files on the ext3/4 filesystem        |
| <a href="#">ext4magic</a>     | <a href="#">V:0.3, I:3.4</a>   | <a href="#">235</a>  | utility to undelete files on the ext3/4 filesystem        |
| <a href="#">ext3grep</a>      | <a href="#">V:0.2, I:1.8</a>   | <a href="#">299</a>  | tool to help recover deleted files on the ext3 filesystem |
| <a href="#">scrounge-ntfs</a> | <a href="#">V:0.2, I:1.5</a>   | <a href="#">49</a>   | data recovery program for NTFS filesystems                |
| <a href="#">gzrt</a>          | <a href="#">V:0.03, I:0.47</a> | <a href="#">34</a>   | gzip recovery toolkit                                     |
| <a href="#">sleuthkit</a>     | <a href="#">V:2, I:25</a>      | <a href="#">1119</a> | tools for forensics analysis. (Sleuthkit)                 |
| <a href="#">autopsy</a>       | <a href="#">V:0.2, I:1.1</a>   | <a href="#">1026</a> | graphical interface to SleuthKit                          |
| <a href="#">foremost</a>      | <a href="#">V:0.4, I:4.0</a>   | <a href="#">102</a>  | forensics application to recover data                     |
| <a href="#">guymager</a>      | <a href="#">V:0.13, I:0.75</a> | <a href="#">1049</a> | forensic imaging tool based on Qt                         |
| <a href="#">dcfldd</a>        | <a href="#">V:0.3, I:2.7</a>   | <a href="#">113</a>  | enhanced version of dd for forensics and security         |

Table 9.24: List of packages for data file recovery and forensic analysis



---

**Tip**

You can undelete files on the ext2 filesystem using `list_deleted_inodes` and `unde1` commands of `debugfs(8)` in the `e2fsprogs` package.

---

### 9.8.5 Splitting a large file into small files

When a data is too big to backup as a single file, you can backup its content after splitting it into, e.g. 2000MiB chunks and merge those chunks back into the original file later.

```
$ split -b 2000m large_file
$ cat x* >large_file
```

**Caution**

Please make sure you do not have any files starting with "x" to avoid name crashes.

---

### 9.8.6 Clearing file contents

In order to clear the contents of a file such as a log file, do not use `rm(1)` to delete the file and then create a new empty file, because the file may still be accessed in the interval between commands. The following is the safe way to clear the contents of the file.

```
$ :>file_to_be_cleared
```

### 9.8.7 Dummy files

The following commands create dummy or empty files.

```
$ dd if=/dev/zero of=5kb.file bs=1k count=5
$ dd if=/dev/urandom of=7mb.file bs=1M count=7
$ touch zero.file
$ : > alwayszero.file
```

You should find following files.

- "5kb.file" is 5KB of zeros.
- "7mb.file" is 7MB of random data.
- "zero.file" may be a 0 byte file. If it existed, its `mtime` is updated while its content and its length are kept.
- "alwayszero.file" is always a 0 byte file. If it existed, its `mtime` is updated and its content is reset.

### 9.8.8 Erasing an entire hard disk

There are several ways to completely erase data from an entire hard disk like device, e.g., [USB flash drive](#) at `/dev/sda`.

---

**Caution**

Check your [USB flash drive](#) location with `mount(8)` first before executing commands here. The device pointed by `"/dev/sda"` may be SCSI hard disk or serial-ATA hard disk where your entire system resides.

---

Erase all the disk content by resetting data to 0 with the following.

```
# dd if=/dev/zero of=/dev/sda
```

Erase everything by overwriting with random data as follows.

```
# dd if=/dev/urandom of=/dev/sda
```

Erase everything by overwriting with random data very efficiently as follows.

```
# shred -v -n 1 /dev/sda
```

You may alternatively use `badblocks(8)` with `-t random` option.

Since `dd(1)` is available from the shell of many bootable Linux CDs such as Debian installer CD, you can erase your installed system completely by running an erase command from such media on the system hard disk, e.g., `"/dev/sda"`, `"/dev/sda"`, etc.

### 9.8.9 Erasing unused area of an hard disk

Unused area on an hard disk (or [USB flash drive](#)), e.g. `"/dev/sdb1"` may still contain erased data themselves since they are only unlinked from the filesystem. These can be cleaned by overwriting them.

```
# mount -t auto /dev/sdb1 /mnt/foo
# cd /mnt/foo
# dd if=/dev/zero of=junk
dd: writing to `junk': No space left on device
...
# sync
# umount /dev/sdb1
```

**Warning**

This is usually good enough for your [USB flash drive](#). But this is not perfect. Most parts of erased filenames and their attributes may be hidden and remain in the filesystem.

---

### 9.8.10 Undeleting deleted but still open files

Even if you have accidentally deleted a file, as long as that file is still being used by some application (read or write mode), it is possible to recover such a file.

For example, try the following

```
$ echo foo > bar
$ less bar
$ ps aux | grep ' less[ ]'
bozo    4775  0.0  0.0  92200   884 pts/8    S+   00:18   0:00 less bar
$ rm bar
$ ls -l /proc/4775/fd | grep bar
lr-x----- 1 bozo bozo 64 2008-05-09 00:19 4 -> /home/bozo/bar (deleted)
```

---

```
$ cat /proc/4775/fd/4 >bar
$ ls -l
-rw-r--r-- 1 bozo bozo 4 2008-05-09 00:25 bar
$ cat bar
foo
```

Execute on another terminal (when you have the `lsuf` package installed) as follows.

```
$ ls -li bar
2228329 -rw-r--r-- 1 bozo bozo 4 2008-05-11 11:02 bar
$ lsuf |grep bar|grep less
less 4775 bozo 4r REG 8,3 4 2228329 /home/bozo/bar
$ rm bar
$ lsuf |grep bar|grep less
less 4775 bozo 4r REG 8,3 4 2228329 /home/bozo/bar (deleted)
$ cat /proc/4775/fd/4 >bar
$ ls -li bar
2228302 -rw-r--r-- 1 bozo bozo 4 2008-05-11 11:05 bar
$ cat bar
foo
```

### 9.8.11 Searching all hardlinks

Files with hardlinks can be identified by "`ls -li`".

```
$ ls -li
total 0
2738405 -rw-r--r-- 1 root root 0 2008-09-15 20:21 bar
2738404 -rw-r--r-- 2 root root 0 2008-09-15 20:21 baz
2738404 -rw-r--r-- 2 root root 0 2008-09-15 20:21 foo
```

Both "baz" and "foo" have link counts of "2" (>1) showing them to have hardlinks. Their [inode](#) numbers are common "2738404". This means they are the same hardlinked file. If you do not happen to find all hardlinked files by chance, you can search it by the [inode](#), e.g., "2738404" as the following.

```
# find /path/to/mount/point -xdev -inum 2738404
```

### 9.8.12 Invisible disk space consumption

All deleted but open files consume disk space although they are not visible from normal `du(1)`. They can be listed with their size by the following.

```
# lsuf -s -X / |grep deleted
```

## 9.9 Data encryption tips

With physical access to your PC, anyone can easily gain root privilege and access all the files on your PC (see Section [4.6.4](#)). This means that login password system can not secure your private and sensitive data against possible theft of your PC. You must deploy data encryption technology to do it. Although [GNU privacy guard](#) (see Section [10.3](#)) can encrypt files, it takes some user efforts.

[Dm-crypt](#) facilitates automatic data encryption via native Linux kernel modules with minimal user efforts using [device-mapper](#).

| package                        | popcon         | size | description  |
|--------------------------------|----------------|------|--|
| <a href="#">cryptsetup</a>     | V:35, I:78     | 462  | utilities for encrypted block device ( <a href="#">dm-crypt</a> / <a href="#">LUKS</a> )   |
| <a href="#">cryptmount</a>     | V:1.9, I:2.5   | 236  | utilities for encrypted block device ( <a href="#">dm-crypt</a> / <a href="#">LUKS</a> ) with focus on mount/unmount by normal users |
| <a href="#">fscrypt</a>        | V:0.4, I:1.1   | 6545 | utilities for Linux filesystem encryption ( <a href="#">fscrypt</a> )  |
| <a href="#">libpam-fscrypt</a> | V:0.27, I:0.34 | 6594 | PAM module for Linux filesystem encryption ( <a href="#">fscrypt</a> )   |

Table 9.25: List of data encryption utilities

**Caution**

Data encryption costs CPU time etc. Encrypted data becomes inaccessible if its password is lost. Please weigh its benefits and costs.

**Note**

Entire Debian system can be installed on a encrypted disk by the [debian-installer](#) (lenny or newer) using [dm-crypt/LUKS](#) and [initramfs](#).

**Tip**

See Section [10.3](#) for user space encryption utility: [GNU Privacy Guard](#).

### 9.9.1 Removable disk encryption with dm-crypt/LUKS

You can encrypt contents of removable mass devices, e.g. [USB flash drive](#) on `/dev/sdx`, using [dm-crypt/LUKS](#). You simply format it as the following.

```
# fdisk /dev/sdx
... "n" "p" "1" "return" "return" "w"
# cryptsetup luksFormat /dev/sdx1
...
# cryptsetup open /dev/sdx1 secret
...
# ls -l /dev/mapper/
total 0
crw-rw---- 1 root root 10, 60 2021-10-04 18:44 control
lrwxrwxrwx 1 root root 7 2021-10-04 23:55 secret -> ../dm-0
# mkfs.vfat /dev/mapper/secret
...
# cryptsetup close secret
```

Then, it can be mounted just like normal one on to `/media/username/disk_label`, except for asking password (see Section [10.1.7](#)) under modern desktop environment using the [udisks2](#) package. The difference is that every data written to it is encrypted. The password entry may be automated using keyring (see Section [10.3.6](#)).

You may alternatively format media in different filesystem, e.g., `ext4` with `mkfs.ext4 /dev/mapper/sdx1`. If `btrfs` is used instead, the [udisks2-btrfs](#) package needs to be installed. For these filesystems, the file ownership and permissions may need to be configured.

### 9.9.2 Mounting encrypted disk with dm-crypt/LUKS

For example, an encrypted disk partition created with [dm-crypt/LUKS](#) on `/dev/sdc5` by Debian Installer can be mounted onto `/mnt` as follows:

```
$ sudo cryptsetup open /dev/sdc5 ninja --type luks
Enter passphrase for /dev/sdc5: ****
$ sudo lvm
lvm> lvscan
  inactive          '/dev/ninja-vg/root' [13.52 GiB] inherit
  inactive          '/dev/ninja-vg/swap_1' [640.00 MiB] inherit
  ACTIVE            '/dev/goofy/root' [180.00 GiB] inherit
  ACTIVE            '/dev/goofy/swap' [9.70 GiB] inherit
lvm> lvchange -a y /dev/ninja-vg/root
lvm> exit
Exiting.
$ sudo mount /dev/ninja-vg/root /mnt
```

## 9.10 The kernel

Debian distributes modularized [Linux kernel](#) as packages for supported architectures.

If you are reading this documentation, you probably don't need to compile Linux kernel by yourself.

### 9.10.1 Kernel parameters

Many Linux features are configurable via kernel parameters as follows.

- Kernel parameters initialized by the bootloader (see Section [3.1.2](#))
- Kernel parameters changed by `sysctl(8)` at runtime for ones accessible via `sysfs` (see Section [1.2.12](#))
- Module parameters set by arguments of `modprobe(8)` when a module is activated (see Section [9.7.3](#))

See "[The Linux kernel user's and administrator's guide](#) » [The kernel's command-line parameters](#)" for the detail.

### 9.10.2 Kernel headers

Most **normal programs** don't need kernel headers and in fact may break if you use them directly for compiling. They should be compiled against the headers in `/usr/include/linux` and `/usr/include/asm` provided by the `libc6-dev` package (created from the `glibc` source package) on the Debian system.

---

#### Note

For compiling some kernel-specific programs such as the kernel modules from the external source and the automounter daemon (`amd`), you must include path to the corresponding kernel headers, e.g. `-I/usr/src/linux-particular-version/include/`, to your command line.

---

### 9.10.3 Compiling the kernel and related modules

Debian has its own method of compiling the kernel and related modules.

If you use `initrd` in Section [3.1.2](#), make sure to read the related information in `initramfs-tools(8)`, `update-initramfs(8)` and `initramfs.conf(5)`.

---

| package                          | popcon       | size  | description   |
|----------------------------------|--------------|-------|---|
| <a href="#">build-essential</a>  | V:16, I:511  | 17    | essential packages for building Debian packages: make, gcc, ...   |
| <a href="#">bzip2</a>            | V:164, I:972 | 113   | compress and decompress utilities for bz2 files                   |
| <a href="#">libncurses5-dev</a>  | I:36         | 6     | developer's libraries and docs for ncurses                        |
| <a href="#">git</a>              | V:406, I:616 | 50972 | git: distributed revision control system used by the Linux kernel |
| <a href="#">fakeroot</a>         | V:32, I:513  | 224   | provide fakeroot environment for building package as non-root     |
| <a href="#">initramfs-tools</a>  | V:465, I:988 | 49    | tool to build an initramfs (Debian specific)                      |
| <a href="#">dkms</a>             | V:79, I:147  | 235   | <a href="#">dynamic kernel module support (DKMS)</a> (generic)    |
| <a href="#">module-assistant</a> | V:1, I:13    | 395   | helper tool to make module package (Debian specific)              |
| <a href="#">devscripts</a>       | V:5, I:32    | 2763  | helper scripts for a Debian Package maintainer (Debian specific)  |

Table 9.26: List of key packages to be installed for the kernel recompilation on the Debian system

**Warning**

Do not put symlinks to the directories in the source tree (e.g. `"/usr/src/linux*"`) from `"/usr/include/linux"` and `"/usr/include/asm"` when compiling the Linux kernel source. (Some out-dated documents suggest this.)

**Note**

When compiling the latest Linux kernel on the Debian stable system, the use of backported latest tools from the Debian unstable may be needed.

`module-assistant(8)` (or its short form `m-a`) helps users to build and install module package(s) easily for one or more custom kernels.

The [dynamic kernel module support \(DKMS\)](#) is a new distribution independent framework designed to allow individual kernel modules to be upgraded without changing the whole kernel. This is used for the maintenance of out-of-tree modules. This also makes it very easy to rebuild modules as you upgrade kernels.

### 9.10.4 Compiling the kernel source: Debian Kernel Team recommendation

For building custom kernel binary packages from the upstream kernel source, you should use the `"deb-pkg"` target provided by it.

```
$ sudo apt-get build-dep linux
$ cd /usr/src
$ wget https://mirrors.edge.kernel.org/pub/linux/kernel/v6.x/linux-version.tar.xz
$ tar --xz -xvf linux-version.tar.xz
$ cd linux-version
$ cp /boot/config-version .config
$ make menuconfig
...
$ make deb-pkg
```

**Tip**

The `linux-source-version` package provides the Linux kernel source with Debian patches as `"/usr/src/linux-version.tar.bz2"`.

For building specific binary packages from the Debian kernel source package, you should use the "binary-arch\_*architecture*" targets in "debian/rules.gen".

```
$ sudo apt-get build-dep linux
$ apt-get source linux
$ cd linux-3.*
$ fakeroot make -f debian/rules.gen binary-arch_i386_none_686
```

See further information:

- Debian Wiki: [KernelFAQ](#)
- Debian Wiki: [DebianKernel](#)
- Debian Linux Kernel Handbook: <https://kernel-handbook.debian.net>

### 9.10.5 Hardware drivers and firmware

The hardware driver is the code running on the main CPUs of the target system. Most hardware drivers are available as free software now and are included in the normal Debian kernel packages in the main area.

- **GPU driver**
  - Intel GPU driver (main)
  - AMD/ATI GPU driver (main)
  - NVIDIA GPU driver (main for [nouveau](#) driver, and non-free for binary-only drivers supported by the vendor.)

The firmware is the code or data loaded on the device attach to the target system (e.g., CPU [microcode](#), rendering code running on GPU, or [FPGA](#) / [CPLD](#) data, ...). Some firmware packages are available as free software but many firmware packages are not available as free software since they contain sourceless binary data. Installing these firmware data is essential for the device to function as expected.

- The firmware data packages containing data loaded to the volatile memory on the target device.
  - firmware-linux-free (main)
  - firmware-linux-nonfree (non-free-firmware)
  - firmware-linux-\* (non-free-firmware)
  - \*-firmware (non-free-firmware)
  - intel-microcode (non-free-firmware)
  - amd64-microcode (non-free-firmware)
- The firmware update program packages which update data on the non-volatile memory on the target device.
  - [fwupd](#) (main): Firmware update daemon which downloads firmware data from [Linux Vendor Firmware Service](#).
  - gnome-firmware (main): GTK front end for fwupd
  - plasma-discover-backend-fwupd (main): Qt front end for fwupd

Please note that access to non-free-firmware packages are provided by the official installation media to offer functional installation experience to the user since Debian 12 Bookworm. The non-free-firmware area is described in Section [2.1.5](#).

Please also note that the firmware data downloaded by [fwupd](#) from [Linux Vendor Firmware Service](#) and loaded to the running Linux kernel may be non-free.

## 9.11 Virtualized system

Use of virtualized system enables us to run multiple instances of system simultaneously on a single hardware.

---

**Tip**

See [Debian wiki on SystemVirtualization](#).

---

### 9.11.1 Virtualization and emulation tools

There are several [virtualization](#) and emulation tool platforms.

- Complete [hardware emulation](#) packages such as ones installed by the [games-emulator](#) metapackage
- Mostly CPU level emulation with some I/O device emulations such as [QEMU](#)
- Mostly CPU level virtualization with some I/O device emulations such as [Kernel-based Virtual Machine \(KVM\)](#)
- OS level container virtualization with the kernel level support such as [LXC \(Linux Containers\)](#), [Docker](#), `systemd-nspawn(1)` ...
- OS level filesystem access virtualization with the system library call override on the file path such as [chroot](#)
- OS level filesystem access virtualization with the system library call override on the file ownership such as [fakeroot](#)
- OS API emulation such as [Wine](#)
- Interpreter level virtualization with its executable selection and run-time library overrides such as [virtualenv](#) and [venv](#) for Python

The container virtualization uses Section [4.7.5](#) and is the backend technology of Section [7.7](#).

Here are some packages to help you to setup the virtualized system.

See Wikipedia article [Comparison of platform virtual machines](#) for detail comparison of different platform virtualization solutions.

### 9.11.2 Virtualization work flow

---

**Note**

Default Debian kernels support [KVM](#) since Lenny.

---

Typical work flow for [virtualization](#) involves several steps.

- Create an empty filesystem (a file tree or a disk image).
    - The file tree can be created by `mkdir -p /path/to/chroot`.
    - The raw disk image file can be created with `dd(1)` (see Section [9.7.1](#) and Section [9.7.5](#)).
    - `qemu-img(1)` can be used to create and convert disk image files supported by [QEMU](#).
    - The raw and [VMDK](#) file format can be used as common format among virtualization tools.
  - Mount the disk image with `mount(8)` to the filesystem (optional).
    - For the raw disk image file, mount it as [loop device](#) or [device mapper](#) devices (see Section [9.7.3](#)).
-



| package                            | popcon         | size   | description   |
|------------------------------------|----------------|--------|---|
| <a href="#">coreutils</a>          | V:911, I:1000  | 17994  | GNU core utilities which contain chroot(8)  |
| <a href="#">util-linux</a>         | V:917, I:1000  | 4658   | miscellaneous system utilities which contain unshare(1)   |
| <a href="#">systemd-container</a>  | V:73, I:76     | 2710   | systemd container/nspawn tools which contain systemd-nspawn(1)  |
| <a href="#">schroot</a>            | V:6.8, I:8.8   | 2222   | specialized tool for executing Debian binary packages in chroot   |
| <a href="#">sbuid</a>              | V:1.3, I:6.4   | 154    | tool for building Debian binary packages from Debian sources  |
| <a href="#">debootstrap</a>        | V:5, I:45      | 331    | bootstrap a basic Debian system (written in sh)   |
| <a href="#">mmdebstrap</a>         | V:7, I:12      | 574    | bootstrap a Debian system (written in Perl)   |
| <a href="#">cdebootstrap</a>       | V:0.1, I:1.3   | 114    | bootstrap a Debian system (written in C)  |
| <a href="#">cloud-image-utils</a>  | V:1, I:14      | 66     | cloud image management utilities  |
| <a href="#">cloud-guest-utils</a>  | V:5, I:22      | 71     | cloud guest utilities   |
| <a href="#">virt-manager</a>       | V:11, I:48     | 2310   | <a href="#">Virtual Machine Manager</a> : desktop application for managing virtual machines                         |
| <a href="#">libvirt-clients</a>    | V:49, I:71     | 1159   | programs for the <a href="#">libvirt</a> library  |
| <a href="#">docker.io</a>          | V:48, I:50     | 80409  | <a href="#">docker</a> : Linux container runtime  |
| <a href="#">podman</a>             | V:31, I:34     | 84758  | <a href="#">podman</a> : engine to run OCI-based containers in Pods   |
| <a href="#">podman-docker</a>      | V:2.8, I:3.3   | 270    | engine to run OCI-based containers in Pods - wrapper for docker   |
| <a href="#">incus</a>              | V:0.8, I:2.9   | 23     | <a href="#">Incus</a> : system container and virtual machine manager  |
| <a href="#">games-emulator</a>     | I:0.19         | 21     | <a href="#">games-emulator</a> : Debian's emulators for games   |
| <a href="#">bochs</a>              | V:0.08, I:0.64 | 8180   | <a href="#">Bochs</a> : IA-32 PC emulator   |
| <a href="#">qemu-system</a>        | I:21           | 61     | <a href="#">QEMU</a> : full system emulation binaries   |
| <a href="#">qemu-user</a>          | V:5.7, I:9.3   | 468923 | <a href="#">QEMU</a> : user mode emulation binaries   |
| <a href="#">qemu-utils</a>         | V:14, I:108    | 12175  | <a href="#">QEMU</a> : utilities  |
| <a href="#">qemu-system-x86</a>    | V:53, I:92     | 68056  | <a href="#">KVM</a> : full virtualization on x86 hardware with the <a href="#">hardware-assisted virtualization</a> |
| <a href="#">virtualbox</a>         | V:3.4, I:4.1   | 151566 | <a href="#">VirtualBox</a> : x86 virtualization solution on i386 and amd64  |
| <a href="#">gnome-boxes</a>        | V:1.2, I:6.4   | 7045   | <a href="#">Boxes</a> : Simple GNOME app to access virtual systems  |
| <a href="#">xen-tools</a>          | V:0.1, I:1.5   | 719    | tools to manage debian <a href="#">XEN</a> virtual server   |
| <a href="#">wine</a>               | V:13, I:55     | 204    | <a href="#">Wine</a> : Windows API Implementation (standard suite)  |
| <a href="#">dosbox</a>             | V:1, I:12      | 2697   | <a href="#">DOSBox</a> : x86 emulator with Tandy/Herc/CGA/EGA/VGA/SVGA graphics, sound and DOS                      |
| <a href="#">lxc</a>                | V:10, I:13     | 1629   | <a href="#">Linux containers user space tools</a>   |
| <a href="#">python3-venv</a>       | V:8, I:147     | 6      | <a href="#">venv</a> for creating virtual python environments (system library)                                      |
| <a href="#">python3-virtualenv</a> | V:7, I:39      | 374    | <a href="#">virtualenv</a> for creating isolated virtual python environments  |
| <a href="#">pipx</a>               | V:7, I:47      | 4398   | <a href="#">pipx</a> for installing python applications in isolated environments                                    |

Table 9.27: List of virtualization tools

- For disk images supported by [QEMU](#), mount them as [network block device](#) (see Section [9.11.3](#)).
- Populate the target filesystem with required system data.
  - The use of programs such as `debootstrap` and `cdebootstrap` helps with this process (see Section [9.11.4](#)).
  - Use installers of OSs under the full system emulation.
- Run a program under a virtualized environment.
  - [chroot](#) provides basic virtualized environment enough to compile programs, run console applications, and run daemons in it.
  - [QEMU](#) provides cross-platform CPU emulation.
  - [QEMU](#) with [KVM](#) provides full system emulation by the [hardware-assisted virtualization](#).
  - [VirtualBox](#) provides full system emulation on i386 and amd64 with or without the [hardware-assisted virtualization](#).

### 9.11.3 Mounting the virtual disk image file

For the raw disk image file, see Section [9.7](#).

For other virtual disk image files, you can use `qemu-nbd(8)` to export them using [network block device](#) protocol and mount them using the `nbd` kernel module.

`qemu-nbd(8)` supports disk formats supported by [QEMU](#): `raw`, `qcow2`, `qcow`, `vmdk`, `vdi`, `bochs`, `cow` (user-mode Linux copy-on-write), `parallels`, `dmz`, `cloop`, `vpc`, `vvfat` (virtual VFAT), and `host_device`.

The [network block device](#) can support partitions in the same way as the [loop device](#) (see Section [9.7.3](#)). You can mount the first partition of `"disk.img"` as follows.

```
# modprobe nbd max_part=16
# qemu-nbd -v -c /dev/nbd0 disk.img
...
# mkdir /mnt/part1
# mount /dev/nbd0p1 /mnt/part1
```

---

#### Tip

You may export only the first partition of `"disk.img"` using `"-P 1"` option to `qemu-nbd(8)`.

---

### 9.11.4 Chroot system

If you wish to try a new Debian environment from a terminal console, I recommend you to use [chroot](#). This enables you to run console applications of Debian `unstable` and `testing` without usual risks associated and without rebooting. `chroot(8)` is the most basic way.



#### Caution

Examples below assumes both parent system and chroot system share the same amd64 CPU architecture.

---

Although you can manually create a `chroot(8)` environment using `debootstrap(1)`, this requires non-trivial efforts.

The [sbuid](#) package to build Debian packages from source uses the chroot environment managed by the [schroot](#) package. It comes with helper script `sbuid-createchroot(1)`. Let's learn how it works by running it as follows.

---

```
$ sudo mkdir -p /srv/chroot
$ sudo sbuild-createchroot -v --include=eatmydata,ccache unstable /srv/chroot/unstable- ↵
amd64-sbuild http://deb.debian.org/debian
...
```

You see how `debootstrap(8)` populates system data for unstable environment under `/srv/chroot/unstable-amd64` for a minimal build system.

You can login to this environment using `schroot(1)`.

```
$ sudo schroot -v -c chroot:unstable-amd64-sbuild
```

You see how a system shell running under unstable environment is created.

---

#### Note

The `/usr/sbin/policy-rc.d` file which always exits with 101 prevents daemon programs to be started automatically on the Debian system. See `/usr/share/doc/init-system-helpers/README.policy-rc.d.gz`.

---



---

#### Note

Some programs under chroot may require access to more files from the parent system to function than `sbuild-createchroot` provides as above. For example, `/sys`, `/etc/passwd`, `/etc/group`, `/var/run/utmp`, `/var/log/wtmp`, etc. may need to be bind-mounted or copied.

---



---

#### Tip

The `sbuild` package helps to construct a chroot system and builds a package inside the chroot using `schroot` as its backend. It is an ideal system to check build-dependencies. See more on [sbuild at Debian wiki](#) and [sbuild configuration example in "Guide for Debian Maintainers"](#).

---



---

#### Tip

The `systemd-nspawn(1)` command helps to run a command or OS in a light-weight container in similar ways to chroot. It is more powerful since it uses namespaces to fully virtualize the the process tree, IPC, hostname, domain name and, optionally, networking and user databases. See [systemd-nspawn](#).

---

### 9.11.5 Multiple desktop systems

If you wish to try a new GUI Desktop environment of any OS, I recommend you to use [QEMU](#) or [KVM](#) on a Debian stable system to run multiple desktop systems safely using [virtualization](#). These enable you to run any desktop applications including ones of Debian unstable and testing without usual risks associated with them and without rebooting.

Since pure [QEMU](#) is very slow, it is recommended to accelerate it with [KVM](#) when the host system supports it.

[Virtual Machine Manager](#) also known as `virt-manager` is a convenient GUI tool for managing KVM virtual machines via [libvirt](#).

The virtual disk image `virtdisk.qcow2` containing a Debian system for [QEMU](#) can be created using [debian-installer: Small CDs](#) as follows.

```
$ wget https://cdimage.debian.org/debian-cd/5.0.3/amd64/iso-cd/debian-503-amd64-netinst.iso
$ qemu-img create -f qcow2 virtdisk.qcow2 5G
$ qemu -hda virtdisk.qcow2 -cdrom debian-503-amd64-netinst.iso -boot d -m 256
...
```

---

---

**Tip**

Running other GNU/Linux distributions such as [Ubuntu](#) and [Fedora](#) under [virtualization](#) is a great way to learn configuration tips. Other proprietary OSs may be run nicely under this GNU/Linux [virtualization](#), too.

---

See more tips at [Debian wiki: SystemVirtualization](#).

## Chapter 10

# Data management

Tools and tips for managing binary and text data on the Debian system are described.

### 10.1 Sharing, copying, and archiving

**Warning**

The uncoordinated write access to actively accessed devices and files from multiple processes must not be done to avoid the [race condition](#). [File locking](#) mechanisms using `flock(1)` may be used to avoid it.

---

The security of the data and its controlled sharing have several aspects.

- The creation of data archive
- The remote storage access
- The duplication
- The tracking of the modification history
- The facilitation of data sharing
- The prevention of unauthorized file access
- The detection of unauthorized file modification

These can be realized by using some combination of tools.

- Archive and compression tools
  - Copy and synchronization tools
  - Network filesystems
  - Removable storage media
  - The secure shell
  - The authentication system
  - Version control system tools
  - Hash and cryptographic encryption tools
-

### 10.1.1 Archive and compression tools

Here is a summary of archive and compression tools available on the Debian system.

**Warning**

Do not set the "\$TAPE" variable unless you know what to expect. It changes tar(1) behavior.

---

- The gzipped tar(1) archive uses the file extension ".tgz" or ".tar.gz".
- The xz-compressed tar(1) archive uses the file extension ".txz" or ".tar.xz".
- Popular compression method in FOSS tools such as tar(1) has been moving as follows: gzip → bzip2 → xz
- cp(1), scp(1) and tar(1) may have some limitation for special files. cpio(1) is most versatile.
- cpio(1) is designed to be used with find(1) and other commands and suitable for creating backup scripts since the file selection part of the script can be tested independently.
- Internal structure of Libreoffice data files are ".jar" file which can be opened also by unzip.
- The de-facto cross platform archive tool is zip. Use it as "zip -rX" to attain the maximum compatibility. Use also the "-s" option, if the maximum file size matters.

### 10.1.2 Copy and synchronization tools

Here is a summary of simple copy and backup tools available on the Debian system.

Copying files with rsync(8) offers richer features than others.

- delta-transfer algorithm that sends only the differences between the source files and the existing files in the destination
- quick check algorithm (by default) that looks for files that have changed in size or in last-modified time
- "--exclude" and "--exclude-from" options similar to tar(1)
- "a trailing slash on the source directory" syntax that avoids creating an additional directory level at the destination.

---

**Tip**

Version control system (VCS) tools in Table 10.14 can function as the multi-way copy and synchronization tools.

---

### 10.1.3 Idioms for the archive

Here are several ways to archive and unarchive the entire content of the directory "./source" using different tools.

GNU tar(1):

```
$ tar -cvJf archive.tar.xz ./source
$ tar -xvJf archive.tar.xz
```

Alternatively, by the following.

```
$ find ./source -xdev -print0 | tar -cvJf archive.tar.xz --null -T -
```

cpio(1):

```
$ find ./source -xdev -print0 | cpio -ov --null > archive.cpio; xz archive.cpio
$ zcat archive.cpio.xz | cpio -i
```

---

| package                    | popcon                        | size                 | extension             | command                                    | comment  |
|----------------------------|-------------------------------|----------------------|-----------------------|--|--|
| <a href="#">tar</a>        | <a href="#">V:908, I:1000</a> | <a href="#">3085</a> | <a href="#">.tar</a>  | <a href="#">tar(1)</a>                     | the standard archiver (de facto standard)  |
| <a href="#">cpio</a>       | <a href="#">V:353, I:999</a>  | <a href="#">1201</a> | <a href="#">.cpio</a> | <a href="#">cpio(1)</a>                    | Unix System V style archiver, use with <a href="#">find(1)</a>   |
| <a href="#">binutils</a>   | <a href="#">V:190, I:640</a>  | <a href="#">1119</a> | <a href="#">.ar</a>   | <a href="#">ar(1)</a>                      | archiver for the creation of static libraries  |
| <a href="#">fastjar</a>    | <a href="#">V:0.9, I:9.6</a>  | <a href="#">182</a>  | <a href="#">.jar</a>  | <a href="#">fastjar(1)</a>                 | archiver for Java (zip like)   |
| <a href="#">pax</a>        | <a href="#">V:5.5, I:9.6</a>  | <a href="#">167</a>  | <a href="#">.pax</a>  | <a href="#">pax(1)</a>                     | new POSIX standard archiver, compromise between tar and cpio   |
| <a href="#">gzip</a>       | <a href="#">V:904, I:1000</a> | <a href="#">256</a>  | <a href="#">.gz</a>   | <a href="#">gzip(1), zcat(1), ...</a>      | GNU <a href="#">LZ77</a> compression utility (de facto standard)   |
| <a href="#">bzip2</a>      | <a href="#">V:164, I:972</a>  | <a href="#">113</a>  | <a href="#">.bz2</a>  | <a href="#">bzip2(1), bzip2cat(1), ...</a> | <a href="#">Burrows-Wheeler block-sorting compression</a> utility with higher compression ratio than <a href="#">gzip(1)</a> (slower than <a href="#">gzip</a> with similar syntax)  |
| <a href="#">lzma</a>       | <a href="#">V:1, I:10</a>     | <a href="#">349</a>  | <a href="#">.lzma</a> | <a href="#">lzma(1)</a>                    | <a href="#">LZMA</a> compression utility with higher compression ratio than <a href="#">gzip(1)</a> (deprecated)   |
| <a href="#">xz-utils</a>   | <a href="#">V:318, I:982</a>  | <a href="#">1520</a> | <a href="#">.xz</a>   | <a href="#">xz(1), xzdec(1), ...</a>       | <a href="#">XZ</a> compression utility with higher compression ratio than <a href="#">bzip2(1)</a> (slower than <a href="#">gzip</a> but faster than <a href="#">bzip2</a> ; replacement for <a href="#">LZMA</a> compression utility) |
| <a href="#">zstd</a>       | <a href="#">V:319, I:803</a>  | <a href="#">2309</a> | <a href="#">.zstd</a> | <a href="#">zstd(1), zstdcat(1), ...</a>   | <a href="#">Zstandard</a> fast lossless compression utility  |
| <a href="#">p7zip</a>      | <a href="#">V:6, I:198</a>    | <a href="#">8</a>    | <a href="#">.7z</a>   | <a href="#">7zr(1), p7zip(1)</a>           | <a href="#">7-Zip</a> file archiver with high compression ratio ( <a href="#">LZMA</a> compression)  |
| <a href="#">p7zip-full</a> | <a href="#">V:20, I:223</a>   | <a href="#">12</a>   | <a href="#">.7z</a>   | <a href="#">7z(1), 7za(1)</a>              | <a href="#">7-Zip</a> file archiver with high compression ratio ( <a href="#">LZMA</a> compression and others)   |
| <a href="#">lzop</a>       | <a href="#">V:12, I:134</a>   | <a href="#">164</a>  | <a href="#">.lzo</a>  | <a href="#">lzop(1)</a>                    | <a href="#">LZO</a> compression utility with higher compression and decompression speed than <a href="#">gzip(1)</a> (lower compression ratio than <a href="#">gzip</a> with similar syntax)   |
| <a href="#">zip</a>        | <a href="#">V:49, I:361</a>   | <a href="#">627</a>  | <a href="#">.zip</a>  | <a href="#">zip(1)</a>                     | <a href="#">InfoZIP</a> : DOS archive and compression tool   |
| <a href="#">unzip</a>      | <a href="#">V:110, I:750</a>  | <a href="#">387</a>  | <a href="#">.zip</a>  | <a href="#">unzip(1)</a>                   | <a href="#">InfoZIP</a> : DOS unarchive and decompression tool   |

Table 10.1: List of archive and compression tools

| package                        | popcon                        | size                  | tool   | function   |
|--------------------------------|-------------------------------|-----------------------|--------|--|
| <a href="#">coreutils</a>      | <a href="#">V:911, I:1000</a> | <a href="#">17994</a> | GNU cp | locally copy files and directories ("-a" for recursive)          |
| <a href="#">openssh-client</a> | <a href="#">V:914, I:996</a>  | <a href="#">4210</a>  | scp    | remotely copy files and directories (client, "-r" for recursive) |
| <a href="#">openssh-server</a> | <a href="#">V:768, I:819</a>  | <a href="#">3359</a>  | sshd   | remotely copy files and directories (remote server)              |
| <a href="#">rsync</a>          | <a href="#">V:195, I:541</a>  | <a href="#">835</a>   |        | 1-way remote synchronization and backup                          |
| <a href="#">unison</a>         | <a href="#">V:3, I:12</a>     | <a href="#">14</a>    |        | 2-way remote synchronization and backup                          |

Table 10.2: List of copy and synchronization tools

### 10.1.4 Idioms for the copy

Here are several ways to copy the entire content of the directory `"/source"` using different tools.

- Local copy: `"/source"` directory → `"/dest"` directory
- Remote copy: `"/source"` directory at local host → `"/dest"` directory at `"user@host.dom"` host

`rsync(8)`:

```
# cd ./source; rsync -aHAXSv . /dest
# cd ./source; rsync -aHAXSv . user@host.dom:/dest
```

You can alternatively use "a trailing slash on the source directory" syntax.

```
# rsync -aHAXSv ./source/ /dest
# rsync -aHAXSv ./source/ user@host.dom:/dest
```

Alternatively, by the following.

```
# cd ./source; find . -print0 | rsync -aHAXSv0 --files-from=- . /dest
# cd ./source; find . -print0 | rsync -aHAXSv0 --files-from=- . user@host.dom:/dest
```

`GNU cp(1)` and `openSSH scp(1)`:

```
# cd ./source; cp -a . /dest
# cd ./source; scp -pr . user@host.dom:/dest
```

`GNU tar(1)`:

```
# (cd ./source && tar cf - . ) | (cd /dest && tar xvpf - )
# (cd ./source && tar cf - . ) | ssh user@host.dom '(cd /dest && tar xvpf - )'
```

`cpio(1)`:

```
# cd ./source; find . -print0 | cpio -pvdm --null --sparse /dest
```

You can substitute `"/"` with `"foo"` for all examples containing `"/"` to copy files from `"/source/foo"` directory to `"/dest/foo"` directory.

You can substitute `"/"` with the absolute path `"/path/to/source/foo"` for all examples containing `"/"` to drop `"cd ./source;"`. These copy files to different locations depending on tools used as follows.

- `"/dest/foo"`: `rsync(8)`, `GNU cp(1)`, and `scp(1)`
- `"/dest/path/to/source/foo"`: `GNU tar(1)`, and `cpio(1)`

---

#### Tip

`rsync(8)` and `GNU cp(1)` have option `"-u"` to skip files that are newer on the receiver.

---



### 10.1.5 Idioms for the selection of files

`find(1)` is used to select files for archive and copy commands (see Section 10.1.3 and Section 10.1.4) or for `xargs(1)` (see Section 9.4.9). This can be enhanced by using its command arguments.

Basic syntax of `find(1)` can be summarized as the following.

- Its conditional arguments are evaluated from left to right.
- This evaluation stops once its outcome is determined.
- "Logical **OR**" (specified by `"-o"` between conditionals) has lower precedence than "logical **AND**" (specified by `"-a"` or nothing between conditionals).
- "Logical **NOT**" (specified by `"!"` before a conditional) has higher precedence than "logical **AND**".
- `"-prune"` always returns logical **TRUE** and, if it is a directory, searching of file is stopped beyond this point.
- `"-name"` matches the base of the filename with shell glob (see Section 1.5.6) but it also matches its initial `"."` with metacharacters such as `"*"` and `"?"`. (New [POSIX](#) feature)
- `"-regex"` matches the full path with emacs style **BRE** (see Section 1.6.2) as default.
- `"-size"` matches the file based on the file size (value preceded with `"+"` for larger, preceded with `"-"` for smaller)
- `"-newer"` matches the file newer than the one specified in its argument.
- `"-print0"` always returns logical **TRUE** and print the full filename ([null terminated](#)) on the standard output.

`find(1)` is often used with an idiomatic style as the following.

```
# find /path/to \  
-xdev -regextype posix-extended \  
-type f -regex ".*\.cpio|.*~" -prune -o \  
-type d -regex ".*\/\.git" -prune -o \  
-type f -size +99M -prune -o \  
-type f -newer /path/to/timestamp -print0
```

This means to do following actions.

1. Search all files starting from `"/path/to"`
2. Globally limit its search within its starting filesystem and uses **ERE** (see Section 1.6.2) instead
3. Exclude files matching regex of `".*\.cpio"` or `".*~"` from search by stop processing
4. Exclude directories matching regex of `".*\/\.git"` from search by stop processing
5. Exclude files larger than 99 Megabytes (units of 1048576 bytes) from search by stop processing
6. Print filenames which satisfy above search conditions and are newer than `"/path/to/timestamp"`

Please note the idiomatic use of `"-prune -o"` to exclude files in the above example.

---

#### Note

For non-Debian [Unix-like](#) system, some options may not be supported by `find(1)`. In such a case, please consider to adjust matching methods and replace `"-print0"` with `"-print"`. You may need to adjust related commands too.

---

### 10.1.6 Archive media

When choosing [computer data storage media](#) for important data archive, you should be careful about their limitations. For small personal data backup, I use CD-R and DVD-R by the brand name company and store in a cool, shaded, dry, clean environment. (Tape archive media seem to be popular for professional use.)

---

**Note**

[A fire-resistant safe](#) are meant for paper documents. Most of the computer data storage media have less temperature tolerance than paper. I usually rely on multiple secure encrypted copies stored in multiple secure locations.

---

Optimistic storage life of archive media seen on the net (mostly from vendor info).

- 100+ years : Acid free paper with ink
- 100 years : Optical storage (CD/DVD, CD/DVD-R)
- 30 years : Magnetic storage (tape, floppy)
- 20 years : Phase change optical storage (CD-RW)

These do not count on the mechanical failures due to handling etc.

Optimistic write cycle of archive media seen on the net (mostly from vendor info).

- 250,000+ cycles : Harddisk drive
- 10,000+ cycles : Flash memory
- 1,000 cycles : CD/DVD-RW
- 1 cycles : CD/DVD-R, paper

**Caution**

Figures of storage life and write cycle here should not be used for decisions on any critical data storage. Please consult the specific product information provided by the manufacture.

---

**Tip**

Since CD/DVD-R and paper have only 1 write cycle, they inherently prevent accidental data loss by overwriting. This is advantage!

---

**Tip**

If you need fast and frequent backup of large amount of data, a hard disk on a remote host linked by a fast network connection, may be the only realistic option.

---

**Tip**

If you use re-writable media for your backups, use of filesystem such as [btrfs](#) or [zfs](#) which supports read-only snapshots may be a good idea.

---

### 10.1.7 Removable storage device

Removable storage devices may be any one of the following.

- [USB flash drive](#)
- [Hard disk drive](#)
- [Optical disc drive](#)
- Digital camera
- Digital music player

They may be connected via any one of the following.

- [USB](#)
- [IEEE 1394 / FireWire](#)
- [PC Card](#)

Modern desktop environments such as GNOME and KDE can mount these removable devices automatically without a matching `/etc/fstab` entry.

- `udisks2` package provides a daemon and associated utilities to mount and unmount these devices.
- [D-bus](#) creates events to initiate automatic processes.
- [PolicyKit](#) provides required privileges.

---

**Tip**

Automounted devices may have the `uhelper=` mount option which is used by `umount(8)`.

---

---

**Tip**

Automounting under modern desktop environment happens only when those removable media devices are not listed in `/etc/fstab`.

---

Mount point under modern desktop environment is chosen as `/media/username/disk_label` which can be customized by the following.

- `mlabel(1)` for FAT filesystem
- `genisoimage(1)` with `-V` option for ISO9660 filesystem
- `tune2fs(1)` with `-L` option for ext2/ext3/ext4 filesystem

---

**Tip**

The choice of encoding may need to be provided as mount option (see Section [8.1.3](#)).

---

---

**Tip**

The use of the GUI menu to unmount a filesystem may remove its dynamically generated device node such as `/dev/sdc`. If you wish to keep its device node, unmount it with the `umount(8)` command from the shell prompt.

---

### 10.1.8 Filesystem choice for sharing data

When sharing data with other system via removable storage device, you should format it with common [filesystem](#) supported by both systems. Here is a list of filesystem choices.

#### Note

Statements on hard disk ([HDD](#)) are applicable to other storage devices such as [SSD](#) / [USB flash drive](#) / [Memory card](#) / ... . Replace device names in examples such as `/dev/sda` with applicable device names `/dev/nvme0`, `/dev/mmcblk0`, ... .

| filesystem name         | typical usage scenario  |
|-------------------------|---|
| <a href="#">FAT12</a>   | cross platform sharing of data on the floppy disk (<32MiB)  |
| <a href="#">FAT16</a>   | cross platform sharing of data on the small hard disk like device (<2GiB)   |
| <a href="#">FAT32</a>   | cross platform sharing of data on the large hard disk like device (<8TiB, supported by newer than MS Windows95 OSR2)  |
| <a href="#">exFAT</a>   | cross platform sharing of data on the large hard disk like device (<512TiB, supported by WindowsXP, Mac OS X Snow Leopard 10.6.5, and Linux kernel since 5.4 release)   |
| <a href="#">NTFS</a>    | cross platform sharing of data on the large hard disk like device (supported natively on <a href="#">MS Windows NT</a> and later version, and supported by <a href="#">NTFS-3G</a> via <a href="#">FUSE</a> on Linux) |
| <a href="#">ISO9660</a> | cross platform sharing of static data on CD-R and DVD+/-R   |
| <a href="#">UDF</a>     | incremental data writing on CD-R and DVD+/-R (new)  |
| <a href="#">MINIX</a>   | space efficient unix file data storage on the floppy disk   |
| <a href="#">ext2</a>    | sharing of data on the hard disk like device with older Linux systems   |
| <a href="#">ext3</a>    | sharing of data on the hard disk like device with older Linux systems   |
| <a href="#">ext4</a>    | sharing of data on the hard disk like device with current Linux systems   |
| <a href="#">btrfs</a>   | sharing of data on the hard disk like device with current Linux systems with read-only snapshots  |

Table 10.3: List of filesystem choices for removable storage devices with typical usage scenarios

#### Tip

See Section [9.9.1](#) for cross platform sharing of data using device level encryption.

The FAT filesystem is supported by almost all modern operating systems and is quite useful for the data exchange purpose via removable hard disk like media.

When formatting removable hard disk like devices for cross platform sharing of data with the FAT filesystem, the following should be safe choices.

- Partitioning them with `fdisk(8)`, `cfdisk(8)` or `parted(8)` (see Section [9.6.2](#)) into a single primary partition and to mark it as the following.
  - Type "6" for FAT16 for media smaller than 2GB.
  - Type "c" for FAT32 (LBA) for larger media.
- Formatting the primary partition with `mkfs.vfat(8)` with the following.
  - Just its device name, e.g. `"/dev/sda1"` for FAT16
  - The explicit option and its device name, e.g. `"-F 32 /dev/sda1"` for FAT32

When using the FAT or ISO9660 filesystems for sharing data, the following should be the safe considerations.

- Archiving files into an archive file first using `tar(1)`, or `cpio(1)` to retain the long filename, the symbolic link, the original Unix file permission and the owner information.
- Splitting the archive file into less than 2 GiB chunks with the `split(1)` command to protect it from the file size limitation.
- Encrypting the archive file to secure its contents from the unauthorized access.

**Note**

For FAT filesystems by its design, the maximum file size is  $(2^{32} - 1)$  bytes = (4GiB - 1 byte). For some applications on the older 32 bit OS, the maximum file size was even smaller  $(2^{31} - 1)$  bytes = (2GiB - 1 byte). Debian does not suffer the latter problem.

**Note**

Microsoft itself does not recommend to use FAT for drives or partitions of over 200 MB. Microsoft highlights its short comings such as inefficient disk space usage in their "[Overview of FAT, HPFS, and NTFS File Systems](#)". Of course, we should normally use the ext4 filesystem for Linux.

**Tip**

For more on filesystems and accessing filesystems, please read "[Filesystems HOWTO](#)".

### 10.1.9 Sharing data via network

When sharing data with other system via network, you should use common service. Here are some hints.

| network service  | description of typical usage scenario  |
|--|--|
| <a href="#">SMB/CIFS</a> network mounted filesystem with <a href="#">Samba</a> | sharing files via "Microsoft Windows Network", see <code>smb.conf(5)</code> and <a href="#">The Official Samba 3.x.x HOWTO and Reference Guide</a> or the <code>samba-doc</code> package |
| <a href="#">NFS</a> network mounted filesystem with the Linux kernel           | sharing files via "Unix/Linux Network", see <code>exports(5)</code> and <a href="#">Linux NFS-HOWTO</a>  |
| <a href="#">HTTP</a> service   | sharing file between the web server/client   |
| <a href="#">HTTPS</a> service  | sharing file between the web server/client with encrypted Secure Sockets Layer (SSL) or <a href="#">Transport Layer Security</a> (TLS)   |
| <a href="#">FTP</a> service  | sharing file between the FTP server/client   |

Table 10.4: List of the network service to choose with the typical usage scenario

Although these filesystems mounted over network and file transfer methods over network are quite convenient for sharing data, these may be insecure. Their network connection must be secured by the following.

- Encrypt it with [SSL/TLS](#)
- Tunnel it via [SSH](#)
- Tunnel it via [VPN](#)
- Limit it behind the secure firewall

See also [Section 6.5](#) and [Section 6.6](#).

## 10.2 Backup and recovery

We all know that computers fail sometime or human errors cause system and data damages. Backup and recovery operations are the essential part of successful system administration. All possible failure modes hit you some day.

---

### Tip

Keep your backup system simple and backup your system often. Having backup data is more important than how technically good your backup method is.

---

### 10.2.1 Backup and recovery policy

There are 3 key factors which determine actual backup and recovery policy.

1. Knowing what to backup and recover.

- Data files directly created by you: data in `"~/`
- Data files created by applications used by you: data in `" /var /"` (except `" /var /cache /"`, `" /var /run /"`, and `" /var /tmp /"`)
- System configuration files: data in `" /etc /"`
- Local programs: data in `" /usr /local /"` or `" /opt /"`
- System installation information: a memo in plain text on key steps (partition, ...)
- Proven set of data: confirmed by experimental recovery operations in advance
  - Cron job as a user process: files in `" /var /spool /cron /crontabs "` directory and restart `cron(8)`. See Section 9.4.14 for `cron(8)` and `crontab(1)`.
  - Systemd timer jobs as user processes: files in `" ~ / .config /systemd /user "` directory. See `systemd.timer(5)` and `systemd.service(5)`.
  - Autostart jobs as user processes: files in `" ~ / .config /autostart "` directory. See [Desktop Application Autostart Specification](#).

2. Knowing how to backup and recover.

- Secure storage of data: protection from overwrite and system failure
- Frequent backup: scheduled backup
- Redundant backup: data mirroring
- Fool proof process: easy single command backup

3. Assessing risks and costs involved.

- Risk of data when lost
  - Data should be at least on different disk partitions preferably on different disks and machines to withstand the filesystem corruption. Important data are best stored on a read-only filesystem. [1](#)
- Risk of data when breached
  - Sensitive identity data such as `" /etc /ssh /ssh_host _*_key "`, `" ~ / .gnupg / * "`, `" ~ / .ssh / * "`, `" ~ / .local /share "`, `" /etc /passwd "`, `" /etc /shadow "`, `" popularity-contest.conf "`, `" /etc /ppp /pap-secrets "`, and `" /etc /x "` should be backed up as encrypted. [2](#) (See Section 9.9.)
  - Never hard code system login password nor decryption passphrase in any script even on any trusted system. (See Section 10.3.6.)

---

<sup>1</sup>A write-once media such as CD/DVD-R can prevent overwrite accidents. (See Section 9.8 for how to write to the storage media from the shell commandline. GNOME desktop GUI environment gives you easy access via menu: "Places → CD/DVD Creator".)

<sup>2</sup>Some of these data can not be regenerated by entering the same input string to the system.

---

- Failure mode and their possibility
  - Hardware (especially HDD) will break
  - Filesystem may be corrupted and data in it may be lost
  - Remote storage system can't be trusted for security breaches
  - Weak password protection can be easily compromised
  - File permission system may be compromised
- Required resources for backup: human, hardware, software, ...
  - Automatic scheduled backup with cron job or systemd timer job

---

**Tip**

You can recover debconf configuration data with "debconf-set-selections debconf-selections" and dpkg selection data with "dpkg --set-selection <dpkg-selections.list".

---

---

**Note**

Do not back up the pseudo-filesystem contents found on /proc, /sys, /tmp, and /run (see Section 1.2.12 and Section 1.2.13). Unless you know exactly what you are doing, they are huge useless data.

---

---

**Note**

You may wish to stop some application daemons such as MTA (see Section 6.2.4) while backing up data.

---

## 10.2.2 Backup utility suites

Here is a select list of notable backup utility suites available on the Debian system.

Backup tools have their specialized focuses.

- [Mondo Rescue](#) is a backup system to facilitate restoration of complete system quickly from backup CD/DVD etc. without going through normal system installation processes.
- [Bacula](#), [Amanda](#), and [BackupPC](#) are full featured backup suite utilities which are focused on regular backups over network.
- [Duplicity](#), and [Borg](#) are simpler backup utilities for typical workstations.

## 10.2.3 Backup tips

For a personal workstation, full featured backup suite utilities designed for the server environment may not serve well. At the same time, existing backup utilities for workstations may have some shortcomings.

Here are some tips to make backup easier with minimal user efforts. These techniques may be used with any backup utilities.

For demonstration purpose, let's assume the primary user and group name to be penguin and create a backup and snapshot script example "/usr/local/bin/bkss.sh" as:

```
#!/bin/sh -e
SRC="$1" # source data path
DSTFS="$2" # backup destination filesystem path
DSTSV="$3" # backup destination subvolume name
DSTSS="${DSTFS}/${DSTSV}-snapshot" # snapshot destination path
if [ "$(stat -f -c %T "$DSTFS")" != "btrfs" ]; then
    echo "E: $DSTFS needs to be formatted to btrfs" >&2 ; exit 1
```

| package                        | popcon         | size  | description   |
|--------------------------------|----------------|-------|---|
| <a href="#">bacula-common</a>  | V:6.3, I:7.2   | 2501  | <a href="#">Bacula</a> : network backup, recovery and verification - common support files               |
| <a href="#">bacula-client</a>  | V:0.3, I:1.9   | 199   | <a href="#">Bacula</a> : network backup, recovery and verification - client meta-package                |
| <a href="#">bacula-console</a> | V:0.7, I:2.1   | 112   | <a href="#">Bacula</a> : network backup, recovery and verification - text console                       |
| <a href="#">bacula-server</a>  | I:0.60         | 199   | <a href="#">Bacula</a> : network backup, recovery and verification - server meta-package                |
| <a href="#">amanda-common</a>  | V:0.6, I:2.2   | 9851  | <a href="#">Amanda</a> : Advanced Maryland Automatic Network Disk Archiver (Libs)                       |
| <a href="#">amanda-client</a>  | V:0.6, I:2.2   | 1099  | <a href="#">Amanda</a> : Advanced Maryland Automatic Network Disk Archiver (Client)                     |
| <a href="#">amanda-server</a>  | V:0.11, I:0.23 | 1093  | <a href="#">Amanda</a> : Advanced Maryland Automatic Network Disk Archiver (Server)                     |
| <a href="#">backupper</a>      | V:1.5, I:1.7   | 3088  | <a href="#">BackupPC</a> is a high-performance, enterprise-grade system for backing up PCs (disk based) |
| <a href="#">duplicity</a>      | V:5, I:47      | 2670  | (remote) incremental backup   |
| <a href="#">deja-dup</a>       | V:29, I:43     | 5274  | GUI frontend for duplicity  |
| <a href="#">borgbackup</a>     | V:13, I:28     | 3485  | (remote) deduplicating backup   |
| <a href="#">borgmatic</a>      | V:3.2, I:4.4   | 946   | borgbackup helper   |
| <a href="#">rdiff-backup</a>   | V:2.3, I:6.6   | 1207  | (remote) incremental backup   |
| <a href="#">restic</a>         | V:6, I:12      | 41560 | (remote) incremental backup   |
| <a href="#">backupninja</a>    | V:2.2, I:2.6   | 360   | lightweight, extensible <b>meta-backup</b> system   |
| <a href="#">slbackup</a>       | V:0.10, I:0.13 | 147   | (remote) incremental backup   |
| <a href="#">backup-manager</a> | V:0.43, I:0.77 | 573   | command-line backup tool  |
| <a href="#">backup2l</a>       | V:0.38, I:0.53 | 110   | low-maintenance backup/restore tool for mountable media (disk based)                                    |

Table 10.5: List of backup suite utilities



```

fi
MSGID=$(notify-send -p "bkup.sh $DSTSV" "in progress ...")
if [ ! -d "$DSTFS/$DSTSV" ]; then
    btrfs subvolume create "$DSTFS/$DSTSV"
    mkdir -p "$DSTSS"
fi
rsync -aHxS --delete --mkpath "${SRC}/" "${DSTFS}/${DSTSV}"
btrfs subvolume snapshot -r "${DSTFS}/${DSTSV}" "${DSTSS}/${date -u --iso=min}"
notify-send -r "$MSGID" "bkup.sh $DSTSV" "finished!"

```

Here, only the basic tool `rsync(1)` is used to facilitate system backup and the storage space is efficiently used by [Btrfs](#).

---

#### Tip

FYI: This author uses his own similar shell script "[bss: Btrfs Subvolume Snapshot Utility](#)" for his workstation.

---

### 10.2.3.1 GUI backup

Here is an example to setup the single GUI click backup.

- Prepare a USB storage device to be used for backup.
  - Format a USB storage device with one partition in btrfs with its label name as "BKUP". This can be encrypted (see [Section 9.9.1](#)).
  - Plug this in to your system. The desktop system should automatically mount it as `/media/penguin/BKUP`.
  - Execute `sudo chown penguin:penguin /media/penguin/BKUP` to make it writable by the user.
- Create `~/ .local/share/applications/BKUP.desktop` following techniques written in [Section 9.4.10](#) as:

```

[Desktop Entry]
Name=bkss
Comment=Backup and snapshot of ~/Documents
Exec=/usr/local/bin/bkss.sh /home/penguin/Documents /media/penguin/BKUP Documents
Type=Application

```

For each GUI click, your data is backed up from `~/Documents` to a USB storage device and a read-only snapshot is created.

### 10.2.3.2 Mount event triggered backup

Here is an example to setup for the automatic backup triggered by the mount event.

- Prepare a USB storage device to be used for backup as in [Section 10.2.3.1](#).
- Create a systemd service unit file `~/ .config/systemd/user/back-BKUP.service` as:

```

[Unit]
Description=USB Disk backup
Requires=media-%u-BKUP.mount
After=media-%u-BKUP.mount

[Service]
ExecStart=/usr/local/bin/bkss.sh %h/Documents /media/%u/BKUP Documents
StandardOutput=append:%h/.cache/systemd-snap.log
StandardError=append:%h/.cache/systemd-snap.log

[Install]
WantedBy=media-%u-BKUP.mount

```

---

- Enable this systemd unit configuration with the following:

```
$ systemctl --user enable bkup-BKUP.service
```

For each mount event, your data is backed up from "~/Documents" to a USB storage device and a read-only snapshot is created.

Here, names of systemd mount units that systemd currently has in memory can be asked to the service manager of the calling user with "systemctl --user list-units --type=mount".

### 10.2.3.3 Timer event triggered backup

Here is an example to setup for the automatic backup triggered by the timer event.

- Prepare a USB storage device to be used for backup as in Section [10.2.3.1](#).
- Create a systemd timer unit file "~/ .config/systemd/user/snap-Documents.timer" as:

```
[Unit]
Description=Run btrfs subvolume snapshot on timer
Documentation=man:btrfs(1)

[Timer]
OnStartupSec=30
OnUnitInactiveSec=900

[Install]
WantedBy=timers.target
```

- Create a systemd service unit file "~/ .config/systemd/user/snap-Documents.service" as:

```
[Unit]
Description=Run btrfs subvolume snapshot
Documentation=man:btrfs(1)

[Service]
Type=oneshot
Nice=15
ExecStart=/usr/local/bin/bkss.sh %h/Documents /media/%u/BKUP Documents
IOSchedulingClass=idle
CPUSchedulingPolicy=idle
StandardOutput=append:%h/.cache/systemd-snap.log
StandardError=append:%h/.cache/systemd-snap.log
```

- Enable this systemd unit configuration with the following:

```
$ systemctl --user enable snap-Documents.timer
```

For each timer event, your data is backed up from "~/Documents" to a USB storage device and a read-only snapshot is created.

Here, names of systemd timer user units that systemd currently has in memory can be asked to the service manager of the calling user with "systemctl --user list-units --type=timer".

For the modern desktop system, this systemd approach can offer more fine grained control than the traditional Unix ones using at(1), cron(8), or anacron(8).

| package                         | popcon           | size  | command              | description  |
|---------------------------------|------------------|-------|----------------------|--|
| <a href="#">gnupg</a>           | V:398,<br>I:867  | 464   | gpg(1)               | <a href="#">GNU Privacy Guard</a> - OpenPGP encryption and signing tool                        |
| <a href="#">gpgv</a>            | V:235,<br>I:939  | 555   | gpgv(1)              | <a href="#">GNU Privacy Guard</a> - OpenPGP signature verification tool                        |
| <a href="#">sq</a>              | V:1, I:27        | 23948 | sq(1)                | <a href="#">Sequoia-PGP</a> - OpenPGP encryption and signing tool                              |
| <a href="#">sqv</a>             | V:415,<br>I:487  | 1702  | sqv(1)               | <a href="#">Sequoia-PGP</a> - OpenPGP signature verification tool                              |
| <a href="#">paperkey</a>        | V:1, I:13        | 58    | paperkey(1)          | extract just the secret information out of OpenPGP secret keys                                 |
| <a href="#">cryptsetup</a>      | V:35, I:78       | 462   | cryptsetup(8)<br>... | utilities for <a href="#">dm-crypt</a> block device encryption supporting <a href="#">LUKS</a> |
| <a href="#">coreutils</a>       | V:911,<br>I:1000 | 17994 | md5sum(1)            | compute and check MD5 message digest   |
| <a href="#">coreutils</a>       | V:911,<br>I:1000 | 17994 | sha1sum(1)           | compute and check SHA1 message digest  |
| <a href="#">openssl</a>         | V:847,<br>I:996  | 2532  | openssl(1ssl)        | compute message digest with "openssl dgst" (OpenSSL)   |
| <a href="#">libsecret-tools</a> | V:1, I:11        | 45    | secret-tool(1)       | store and retrieve passwords (CLI)   |
| <a href="#">seahorse</a>        | V:75, I:261      | 7971  | seahorse(1)          | key management tool (GNOME)  |

Table 10.6: List of data security infrastructure tools

## 10.3 Data security infrastructure

The data security infrastructure is provided by the combination of data encryption tool, message digest tool, and signature tool.

See Section 9.9 on [dm-crypt](#) and [fscrypt](#) which implement automatic data encryption infrastructure via Linux kernel modules.

### 10.3.1 Key management for GnuPG

Here are [GNU Privacy Guard](#) commands for the basic key management.

Here is the meaning of the trust code.

The following generates my key "9563FC29932C409F1A77F9C1AB8A1522D8234C6A".

```
$ gpg --gen-key
gpg (GnuPG) 2.4.7; Copyright (C) 2024 g10 Code GmbH
...
GnuPG needs to construct a user ID to identify your key.

Real name: Osamu Aoki
Email address: osamu@debian.org
You selected this USER-ID:
    "Osamu Aoki <osamu@debian.org>"

Change (N)ame, (E)mail, or (O)kay/(Q)uit? o
...
public and secret key created and signed.

pub  ed25519 2026-02-14 [SC] [expires: 2029-02-13]
     9563FC29932C409F1A77F9C1AB8A1522D8234C6A
```

| command                             | description                             |
|-------------------------------------|---|
| gpg --gen-key                       | generate a new key                      |
| gpg --gen-revoke my_user_ID         | generate revoke key for my_user_ID      |
| gpg --edit-key user_ID              | edit key interactively, "help" for help |
| gpg -o file --export                | export all public keys to file          |
| gpg -o file<br>--export-secret-keys | export all private key to file          |
| gpg --import file                   | import all keys from file               |
| gpg --send-keys user_ID             | send key of user_ID to keyserver        |
| gpg --recv-keys user_ID             | recv. key of user_ID from keyserver     |
| gpg --list-keys user_ID             | list keys of user_ID                    |
| gpg --list-sigs user_ID             | list sig. of user_ID                    |
| gpg --check-sigs user_ID            | check sig. of user_ID                   |
| gpg --fingerprint user_ID           | check fingerprint of user_ID            |
| gpg --refresh-keys                  | update local keyring                    |

Table 10.7: List of GNU Privacy Guard commands for the key management

| code | description of trust                         |
|------|--|
| -    | no owner trust assigned / not yet calculated |
| e    | trust calculation failed                     |
| q    | not enough information for calculation       |
| n    | never trust this key                         |
| m    | marginally trusted                           |
| f    | fully trusted                                |
| u    | ultimately trusted                           |

Table 10.8: List of the meaning of the trust code

```
uid          Osamu Aoki <osamu@debian.org>
sub  cv25519 2026-02-14 [E] [expires: 2029-02-13]
```

The following uploads my key "9563FC29932C409F1A77F9C1AB8A1522D8234C6A" to the popular keyserver "hkp://key

```
$ gpg --keyserver hkp://keys.gnupg.net --send-keys 9563FC29932C409F1A77F9C1AB8A1522D8234C6A
```

A good default keyserver set up in "~/.gnupg/gpg.conf" (or old location "~/.gnupg/options") contains the following.

```
keyserver hkp://keys.gnupg.net
```

The following obtains unknown keys from the keyserver.

```
$ gpg --list-sigs --with-colons | grep '^sig.*\[User ID not found\]' | \
    cut -d ':' -f 5 | sort | uniq | xargs gpg --recv-keys
```

There was a bug in [OpenPGP Public Key Server](#) (pre version 0.9.6) which corrupted key with more than 2 sub-keys. The newer gnupg (>1.2.1-2) package can handle these corrupted subkeys. See `gpg(1)` under "-repair-pks-subkey-bu" option.

Use of SHA-1 for hash has been deprecated. If your old RSA based openPGP key uses SHA-1 for hash, fix it using [FixKeyWithSha1](#).

---

#### Tip

The `sq(1)` and `sqv(1)` commands are an alternative set of openPGP commands. See [sq user documentation](#) and [A Practical Introduction to using sq, Sequoia PGP's CLI](#).

---

### 10.3.2 Using GnuPG on files

Here are examples for using [GNU Privacy Guard](#) commands on files.

### 10.3.3 Using GnuPG with Mutt

Add the following to "~/.muttrc" to keep a slow GnuPG from automatically starting, while allowing it to be used by typing "S" at the index menu.

```
macro index S ":toggle pgp_verify_sig\n"
set pgp_verify_sig=no
```

### 10.3.4 Using GnuPG with Vim

The gnupg plugin let you run GnuPG transparently for files with extension ".pgp", ".asc", and ".pgp".[3](#)

```
$ sudo aptitude install vim-scripts
$ echo "packadd! gnupg" >> ~/.vim/vimrc
```

---

<sup>3</sup>If you use "~/.vimrc" instead of "~/.vim/vimrc", please substitute accordingly.

| command  | description  |
|--|--|
| <code>gpg -a -s file</code>  | sign file into <a href="#">ASCII</a> armored file.asc  |
| <code>gpg --armor --sign file</code>                                   | , ,  |
| <code>gpg --clearsign file</code>                                      | clear-sign message   |
| <code>gpg --clearsign file mail<br/>foo@example.org</code>             | mail a clear-signed message to foo@example.org   |
| <code>gpg --clearsign<br/>--not-dash-escaped patchfile</code>          | clear-sign patchfile   |
| <code>gpg --verify file</code>   | verify clear-signed file   |
| <code>gpg -o file.sig -b file</code>                                   | create detached signature  |
| <code>gpg -o file.sig --detach-sign<br/>file</code>                    | , ,  |
| <code>gpg --verify file.sig file</code>                                | verify file with file.sig  |
| <code>gpg -o crypt_file.gpg -r name<br/>-e file</code>                 | public-key encryption intended for name from file to binary<br>crypt_file.gpg                        |
| <code>gpg -o crypt_file.gpg<br/>--recipient name --encrypt file</code> | , ,  |
| <code>gpg -o crypt_file.asc -a -r<br/>name -e file</code>              | public-key encryption intended for name from file to <a href="#">ASCII</a><br>armored crypt_file.asc |
| <code>gpg -o crypt_file.gpg -c file</code>                             | symmetric encryption from file to crypt_file.gpg   |
| <code>gpg -o crypt_file.gpg<br/>--symmetric file</code>                | , ,  |
| <code>gpg -o crypt_file.asc -a -c<br/>file</code>                      | symmetric encryption intended for name from file to <a href="#">ASCII</a><br>armored crypt_file.asc  |
| <code>gpg -o file -d crypt_file.gpg<br/>-r name</code>                 | decryption   |
| <code>gpg -o file --decrypt<br/>crypt_file.gpg</code>                  | , ,  |

Table 10.9: List of GNU Privacy Guard commands on files

### 10.3.5 The MD5 sum

md5sum(1) provides utility to make a digest file using the method in [rfc1321](#) and verifying each file with it.

```
$ md5sum foo bar >baz.md5
$ cat baz.md5
d3b07384d113edec49eaa6238ad5ff00  foo
c157a79031e1c40f85931829bc5fc552  bar
$ md5sum -c baz.md5
foo: OK
bar: OK
```

---

**Note**

The computation for the [MD5](#) sum is less CPU intensive than the one for the cryptographic signature by [GNU Privacy Guard \(GnuPG\)](#). Usually, only the top level digest file is cryptographically signed to ensure data integrity.

---

### 10.3.6 Password keyring

On GNOME system, the GUI tool `seahorse(1)` manages passwords and stores them securely in the keyring `~/.local/share/secret-tool(1)` can store password to the keyring from the command line.

Let's store passphrase used for LUKS/dm-crypt encrypted disk image

```
$ secret-tool store --label='LUKS passphrase for disk.img' LUKS my_disk.img
Password: *****
```

This stored password can be retrieved and fed to other programs, e.g., `cryptsetup(8)`.

```
$ secret-tool lookup LUKS my_disk.img | \
  cryptsetup open disk.img disk_img --type luks --keyring -
$ sudo mount /dev/mapper/disk_img /mnt
```

---

**Tip**

Whenever you need to provide password in a script, use `secret-tool` and avoid directly hardcoding the passphrase in it.

---

## 10.4 Source code merge tools

There are many merge tools for the source code. Following commands caught my eyes.

### 10.4.1 Extracting differences for source files

The following procedures extract differences between two source files and create unified diff files "file.patch0" or "file.patch1" depending on the file location.

```
$ diff -u file.old file.new > file.patch0
$ diff -u old/file new/file > file.patch1
```

---

| package                    | popcon            | size | command        | description   |
|----------------------------|-------------------|------|----------------|---|
| <a href="#">patch</a>      | V:103,<br>I:726   | 242  | patch(1)       | apply a diff file to an original                              |
| <a href="#">vim</a>        | V:85, I:347       | 4135 | vimdiff(1)     | compare 2 files side by side in vim                           |
| <a href="#">imediff</a>    | V:0.03,<br>I:0.26 | 329  | imediff(1)     | interactive full screen 2/3-way merge tool                    |
| <a href="#">meld</a>       | V:5, I:24         | 3546 | meld(1)        | compare and merge files (GTK)                                 |
| <a href="#">wiggle</a>     | V:0.00,<br>I:0.12 | 175  | wiggle(1)      | apply rejected patches  |
| <a href="#">diffutils</a>  | V:896,<br>I:998   | 1768 | diff(1)        | compare files line by line                                    |
| <a href="#">diffutils</a>  | V:896,<br>I:998   | 1768 | diff3(1)       | compare and merges three files line by line                   |
| <a href="#">quilt</a>      | V:2, I:17         | 880  | quilt(1)       | manage series of patches                                      |
| <a href="#">wdiff</a>      | V:6, I:40         | 651  | wdiff(1)       | display word differences between text files                   |
| <a href="#">diffstat</a>   | V:9, I:98         | 79   | diffstat(1)    | produce a histogram of changes by the diff                    |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | combinediff(1) | create a cumulative patch from two incremental patches        |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | dehtmldiff(1)  | extract a diff from an HTML page                              |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | filterdiff(1)  | extract or excludes diffs from a diff file                    |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | fixcvsdiff(1)  | fix diff files created by CVS that patch(1) mis-interprets    |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | flipdiff(1)    | exchange the order of two patches                             |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | grepdiff(1)    | show which files are modified by a patch matching a regex     |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | interdiff(1)   | show differences between two unified diff files               |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | lsdiff(1)      | show which files are modified by a patch                      |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | recountdiff(1) | recompute counts and offsets in unified context diffs         |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | rediff(1)      | fix offsets and counts of a hand-edited diff                  |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | splitdiff(1)   | separate out incremental patches                              |
| <a href="#">patchutils</a> | V:11, I:97        | 269  | unwrapdiff(1)  | demangle patches that have been word-wrapped                  |
| <a href="#">dirdiff</a>    | V:0.1, I:1.4      | 167  | dirdiff(1)     | display differences and merge changes between directory trees |
| <a href="#">docdiff</a>    | V:0.03,<br>I:0.26 | 554  | docdiff(1)     | compare two files word by word / char by char                 |
| <a href="#">makepatch</a>  | V:0.02,<br>I:0.16 | 99   | makepatch(1)   | generate extended patch files                                 |
| <a href="#">makepatch</a>  | V:0.02,<br>I:0.16 | 99   | applypatch(1)  | apply extended patch files                                    |

Table 10.10: List of source code merge tools



### 10.4.2 Merging updates for source files

The diff file (alternatively called patch file) is used to send a program update. The receiving party applies this update to another file by the following.

```
$ patch -p0 file < file.patch0
$ patch -p1 file < file.patch1
```

### 10.4.3 Interactive merge

If you have two versions of a source code, you can perform 2-way merge interactively using `imediff(1)` by the following.

```
$ imediff -o file.merged file.old file.new
```

If you have three versions of a source code, you can perform 3-way merge interactively using `imediff(1)` by the following.

```
$ imediff -o file.merged file.yours file.base file.theirs
```

## 10.5 Git

Git is the tool of choice these days for the [version control system \(VCS\)](#) since Git can do everything for both local and remote source code management.

Debian provides free Git services via [Debian Salsa service](#). Its documentation can be found at <https://wiki.debian.org/Salsa>.

Here are some Git related packages.

| package                          | popcon            | size  | command             | description  |
|----------------------------------|-------------------|-------|---------------------|--|
| <a href="#">git</a>              | V:406,<br>I:616   | 50972 | git(7)              | Git, the fast, scalable, distributed revision control system |
| <a href="#">gitk</a>             | V:4, I:27         | 2022  | gitk(1)             | GUI Git repository browser with history                      |
| <a href="#">qgit</a>             | V:0.2, I:2.0      | 1431  | qgit(1)             | GUI Git repository browser with history                      |
| <a href="#">git-cola</a>         | V:0.7, I:4.6      | 5005  | git-cola(1)         | GUI Git repository browser with history                      |
| <a href="#">tig</a>              | V:2, I:12         | 1243  | tig(1)              | console Git repository browser with history                  |
| <a href="#">lazygit</a>          | V:0.8, I:3.6      | 24167 | lazygit(1)          | console Git repository browser with history                  |
| <a href="#">git-gui</a>          | V:1, I:17         | 2525  | git-gui(1)          | GUI for Git (No history)                                     |
| <a href="#">git-email</a>        | V:0.4, I:9.8      | 1204  | git-send-email(1)   | collection of patches as email from the Git                  |
| <a href="#">git-buildpackage</a> | V:1.2, I:7.1      | 2027  | git-buildpackage(1) | the Debian packaging with the Git                            |
| <a href="#">dgit</a>             | V:0.2, I:1.0      | 738   | dgit(1)             | git interoperability with the Debian archive                 |
| <a href="#">imediff</a>          | V:0.03,<br>I:0.26 | 329   | git-ime(1)          | interactive git commit split helper tool                     |
| <a href="#">stgit</a>            | V:0.07,<br>I:0.50 | 6181  | stg(1)              | quilt on top of git (Python)                                 |
| <a href="#">git-doc</a>          | I:11              | 14896 | N/A                 | official documentation for Git                               |
| <a href="#">gitmagic</a>         | I:0.52            | 721   | N/A                 | "Git Magic", easier to understand guide for Git              |

Table 10.11: List of git related packages and commands

### 10.5.1 Configuration of Git client

You may wish to set several global configuration in "~/.gitconfig" such as your name and email address used by Git by the following.

```
$ git config --global user.name "Name Surname"
$ git config --global user.email yourname@example.com
```

You may also customize the Git default behavior by the following.

```
$ git config --global init.defaultBranch main
$ git config --global pull.rebase true
$ git config --global push.default current
```

If you are too used to CVS or Subversion commands, you may wish to set several command aliases by the following.

```
$ git config --global alias.ci "commit -a"
$ git config --global alias.co checkout
```

You can check your global configuration by the following.

```
$ git config --global --list
```

### 10.5.2 Basic Git commands

Git operation involves several data.

- The working tree which holds user facing files and to which you make changes.
  - The changes to be recorded must be explicitly selected and staged to the index. This is `git add` and `git rm` commands.
- The index which holds staged files.
  - Staged files will be committed to the local repository upon the subsequent request. This is `git commit` command.
- The local repository which holds committed files.
  - Git records the linked history of the committed data and organizes them as branches in the repository.
  - The local repository can send data to the remote repository by `git push` command.
  - The local repository can receive data from the remote repository by `git fetch` and `git pull` commands.
    - \* The `git pull` command performs `git merge` or `git rebase` command after `git fetch` command.
    - \* Here, `git merge` combines two separate branches of history at the end to a point. (This is default of `git pull` without customization and may be good for upstream people who publish branch to many people.)
    - \* Here, `git rebase` creates one single branch of sequential history of the remote branch one followed by the local branch one. (This is `pull.rebase true` customization case and may be good for rest of us.)
- The remote repository which holds committed files.
  - The communication to the remote repository uses secure communication protocols such as SSH or HTTPS.

The working tree is files outside of the `.git/` directory. Files inside of the `.git/` directory hold the index, the local repository data, and some git configuration text files.

Here is an overview of main Git commands.

---

| Git command                                 | function  |
|---|---|
| <code>git init</code>                       | create the (local) repository   |
| <code>git clone URL</code>                  | clone the remote repository to a local repository with the working tree   |
| <code>git pull origin main</code>           | update the local <code>main</code> branch by the remote repository <code>origin</code>                                |
| <code>git add .</code>                      | add file(s) in the working tree to the index for pre-existing files in index only                                     |
| <code>git add -A .</code>                   | add file(s) in the working tree to the index for all files including removals   |
| <code>git rm filename</code>                | remove file(s) from the working tree and the index  |
| <code>git commit</code>                     | commit staged changes in the index to the local repository  |
| <code>git commit -a</code>                  | add all changes in the working tree to the index and commit them to the local repository (add + commit)               |
| <code>git push -u origin branch_name</code> | update the remote repository <code>origin</code> by the local <code>branch_name</code> branch (initial invocation)    |
| <code>git push origin branch_name</code>    | update the remote repository <code>origin</code> by the local <code>branch_name</code> branch (subsequent invocation) |
| <code>git diff treeish1 treeish2</code>     | show difference between <i>treeish1</i> commit and <i>treeish2</i> commit   |
| <code>gitk</code>                           | GUI display of VCS repository branch history tree   |

Table 10.12: Main Git commands

### 10.5.3 Git tips

Here are some Git tips.



#### Warning

Do not use the tag string with spaces in it even if some tools such as `gitk(1)` allow you to use it. It may choke some other `git` commands.



#### Caution

If a local branch which has been pushed to remote repository is rebased or squashed, pushing this branch has risks and requires `--force` option. This is usually not an acceptable for `main` branch but may be acceptable for a topic branch before merging to `main` branch.



#### Caution

Invoking a `git` subcommand directly as `"git-xyz"` from the command line has been deprecated since early 2006.

#### Tip

If there is a executable file `git-foo` in the path specified by `$PATH`, entering `"git foo"` without hyphen to the command line invokes this `git-foo`. This is a feature of the `git` command.

### 10.5.4 Git references

See the following.

| Git command line  | function  |
|---|---|
| <code>gitk --all</code>   | see complete Git history and operate on them such as resetting HEAD to another commit, cheery-picking patches, creating tags and branches ... |
| <code>git stash</code>  | get the clean working tree without loosing data   |
| <code>git remote -v</code>  | check settings for remote   |
| <code>git branch -vv</code>   | check settings for branch   |
| <code>git status</code>   | show working tree status  |
| <code>git config -l</code>  | list git settings   |
| <code>git reset --hard HEAD; git clean -x -d -f</code>  | revert all working tree changes and clean them up completely  |
| <code>git rm --cached filename</code>   | revert staged index changed by <code>git add filename</code>  |
| <code>git reflog</code>   | get reference log (useful for recovering commits from the removed branch)   |
| <code>git branch new_branch_name HEAD@{6}</code>  | create a new branch from reflog information   |
| <code>git remote add new_remote URL</code>  | add a new_remote remote repository pointed by URL   |
| <code>git remote rename origin upstream</code>  | rename the remote repository name from origin to upstream   |
| <code>git branch -u upstream/branch_name</code>   | set the remote tracking to the remote repository upstream and its branch name branch_name.  |
| <code>git remote set-url origin https://foo/bar.git</code>                                      | change URL of origin  |
| <code>git remote set-url --push upstream DISABLED</code>  | disable push to upstream (Edit .git/config to re-enable)  |
| <code>git remote update upstream</code>   | fetch updates of all remote branches in the upstream repository   |
| <code>git fetch upstream<br/>foo:upstream-foo</code>  | create a local (possibly orphan) upstream-foo branch as a copy of foo branch in the upstream repository                                       |
| <code>git checkout -b topic_branch ;<br/>git push -u topic_branch origin</code>                 | make a new topic_branch and push it to origin   |
| <code>git branch -m oldname newname</code>  | rename local branch name  |
| <code>git push -d origin<br/>branch_to_be_removed</code>  | remove remote branch (new method)   |
| <code>git push origin<br/>:branch_to_be_removed</code>  | remove remote branch (old method)   |
| <code>git checkout --orphan<br/>unconnected</code>  | create a new unconnected branch   |
| <code>git rebase -i origin/main</code>  | reorder/drop/squish commits from origin/main to clean branch history  |
| <code>git reset HEAD^; git commit --amend</code>  | squash last 2 commits into one  |
| <code>git checkout topic_branch ; git merge --squash topic_branch</code>                        | squash entire topic_branch into a commit  |
| <code>git fetch --unshallow<br/>--update-head-ok origin<br/>'+refs/heads/*:refs/heads/*'</code> | convert a shallow clone to the full clone of all branches   |
| <code>git ime</code>  | split the last commit into a series of file-by-file smaller commits etc. (imediff package required)   |
| <code>git repack -a -d; git prune</code>  | repack the local repository into single pack (this may limit chance of lost data recovery from erased branch etc.)                            |

Table 10.13: Git tips

- [manpage: git\(1\)](/usr/share/doc/git-doc/git.html) (/usr/share/doc/git-doc/git.html)
- [Git User's Manual](/usr/share/doc/git-doc/user-manual.html) (/usr/share/doc/git-doc/user-manual.html)
- [A tutorial introduction to git](/usr/share/doc/git-doc/gittutorial.html) (/usr/share/doc/git-doc/gittutorial.html)
- [A tutorial introduction to git: part two](/usr/share/doc/git-doc/gittutorial-2.html) (/usr/share/doc/git-doc/gittutorial-2.html)
- [Everyday GIT With 20 Commands Or So](/usr/share/doc/git-doc/giteveryday.html) (/usr/share/doc/git-doc/giteveryday.html)
- [Git Magic](/usr/share/doc/gitmagic/html/index.html) (/usr/share/doc/gitmagic/html/index.html)

### 10.5.5 Other version control systems

The [version control systems \(VCS\)](#) is sometimes known as the revision control system (RCS), or the software configuration management (SCM).

Here is a summary of the notable other non-Git VCS on the Debian system.

| package                    | popcon         | size  | tool                       | VCS type    | comment   |
|----------------------------|----------------|-------|----------------------------|-------------|---|
| <a href="#">mercurial</a>  | V:3, I:26      | 2575  | <a href="#">Mercurial</a>  | distributed | DVCS in Python and some C   |
| <a href="#">darcs</a>      | V:0.2, I:3.3   | 38856 | <a href="#">Darcs</a>      | distributed | DVCS with smart algebra of patches (slow)   |
| <a href="#">tla</a>        | V:0.04, I:0.74 | 1022  | <a href="#">GNU arch</a>   | distributed | DVCS mainly by Tom Lord (historic)  |
| <a href="#">bazaar</a>     | V:0.1, I:4.3   | 28    | <a href="#">GNU Bazaar</a> | distributed | DVCS influenced by <a href="#">tla</a> written in Python ( <a href="#">historic</a> ) |
| <a href="#">subversion</a> | V:10, I:57     | 4849  | <a href="#">Subversion</a> | remote      | "CVS done right", newer standard remote VCS (historic)                                |
| <a href="#">cvs</a>        | V:3, I:25      | 4835  | <a href="#">CVS</a>        | remote      | previous standard remote VCS (historic)   |
| <a href="#">tkcvs</a>      | V:0.12, I:0.88 | 34    | CVS, ...                   | remote      | GUI display of VCS (CVS, Subversion, RCS) repository tree                             |
| <a href="#">rcs</a>        | V:1.6, I:9.6   | 578   | <a href="#">RCS</a>        | local       | " <a href="#">Unix SCCS</a> done right" (historic)                                    |
| <a href="#">cssc</a>       | V:0.01, I:0.35 | 2044  | <a href="#">CSSC</a>       | local       | clone of the <a href="#">Unix SCCS</a> (historic)                                     |

Table 10.14: List of other version control system tools

## Chapter 11

# Data conversion

Tools and tips for converting data formats on the Debian system are described.

Standard based tools are in very good shape but support for proprietary data formats are limited.

### 11.1 Text data conversion tools

Following packages for the text data conversion caught my eyes.

| package                  | popcon            | size | keyword     | description   |
|--------------------------|-------------------|------|-------------|---|
| <a href="#">libc6</a>    | V:940,<br>I:1000  | 5355 | charset     | text encoding converter between locales by <code>iconv(1)</code> (fundamental)                      |
| <a href="#">recode</a>   | V:2, I:13         | 528  | charset+eol | text encoding converter between locales (versatile, more aliases and features)                      |
| <a href="#">konwert</a>  | V:2, I:42         | 137  | charset     | text encoding converter between locales (fancy)   |
| <a href="#">nkf</a>      | V:0.4, I:8.5      | 359  | charset     | character set translator for Japanese   |
| <a href="#">tcs</a>      | V:0.01,<br>I:0.13 | 518  | charset     | character set translator  |
| <a href="#">unaccent</a> | V:0.03,<br>I:0.30 | 35   | charset     | replace accented letters by their unaccented equivalent   |
| <a href="#">tofrodos</a> | V:1, I:13         | 50   | eol         | text format converter between DOS and Unix: <code>fromdos(1)</code> and <code>todos(1)</code>       |
| <a href="#">macutils</a> | V:0.04,<br>I:0.45 | 319  | eol         | text format converter between Macintosh and Unix: <code>frommac(1)</code> and <code>tomac(1)</code> |

Table 11.1: List of text data conversion tools

#### 11.1.1 Converting a text file with `iconv`

---

##### Tip

`iconv(1)` is provided as a part of the `libc6` package and it is always available on practically all Unix-like systems to convert the encoding of characters.

---

You can convert encodings of a text file with `iconv(1)` by the following.

```
$ iconv -f encoding1 -t encoding2 input.txt >output.txt
```

---

Encoding values are case insensitive and ignore "-" and "\_" for matching. Supported encodings can be checked by the "iconv -l" command.

| encoding value              | usage   |
|-----------------------------|---|
| <a href="#">ASCII</a>       | <a href="#">American Standard Code for Information Interchange</a> , 7 bit code w/o accented characters                                       |
| <a href="#">UTF-8</a>       | current multilingual standard for all modern OSs  |
| <a href="#">ISO-8859-1</a>  | old standard for western European languages, ASCII + accented characters  |
| <a href="#">ISO-8859-2</a>  | old standard for eastern European languages, ASCII + accented characters  |
| <a href="#">ISO-8859-15</a> | old standard for western European languages, <a href="#">ISO-8859-1</a> with euro sign  |
| <a href="#">CP850</a>       | code page 850, Microsoft DOS characters with graphics for western European languages, <a href="#">ISO-8859-1</a> variant                      |
| <a href="#">CP932</a>       | code page 932, Microsoft Windows style <a href="#">Shift-JIS</a> variant for Japanese   |
| <a href="#">CP936</a>       | code page 936, Microsoft Windows style <a href="#">GB2312</a> , <a href="#">GBK</a> or <a href="#">GB18030</a> variant for Simplified Chinese |
| <a href="#">CP949</a>       | code page 949, Microsoft Windows style <a href="#">EUC-KR</a> or Unified Hangul Code variant for Korean                                       |
| <a href="#">CP950</a>       | code page 950, Microsoft Windows style <a href="#">Big5</a> variant for Traditional Chinese   |
| <a href="#">CP1251</a>      | code page 1251, Microsoft Windows style encoding for the Cyrillic alphabet  |
| <a href="#">CP1252</a>      | code page 1252, Microsoft Windows style <a href="#">ISO-8859-15</a> variant for western European languages                                    |
| <a href="#">KOI8-R</a>      | old Russian UNIX standard for the Cyrillic alphabet   |
| <a href="#">ISO-2022-JP</a> | standard encoding for Japanese email which uses only 7 bit codes  |
| <a href="#">eucJP</a>       | old Japanese UNIX standard 8 bit code and completely different from <a href="#">Shift-JIS</a>   |
| <a href="#">Shift-JIS</a>   | JIS X 0208 Appendix 1 standard for Japanese (see <a href="#">CP932</a> )  |

Table 11.2: List of encoding values and their usage

#### Note

Some encodings are only supported for the data conversion and are not used as locale values (Section [8.1](#)).

For character sets which fit in single byte such as [ASCII](#) and [ISO-8859](#) character sets, the [character encoding](#) means almost the same thing as the character set.

For character sets with many characters such as [JIS X 0213](#) for Japanese or [Universal Character Set \(UCS, Unicode, ISO-10646-1\)](#) for practically all languages, there are many encoding schemes to fit them into the sequence of the byte data.

- [EUC](#) and [ISO/IEC 2022 \(also known as JIS X 0202\)](#) for Japanese
- [UTF-8](#), [UTF-16/UCS-2](#) and [UTF-32/UCS-4](#) for Unicode

For these, there are clear differentiations between the character set and the character encoding.

The [code page](#) is used as the synonym to the character encoding tables for some vendor specific ones.

**Note**

Please note most encoding systems share the same code with ASCII for the 7 bit characters. But there are some exceptions. If you are converting old Japanese C programs and URLs data from the casually-called shift-JIS encoding format to UTF-8 format, use "CP932" as the encoding name instead of "shift-JIS" to get the expected results: 0x5C → "\"" and 0x7E → "~". Otherwise, these are converted to wrong characters.

**Tip**

recode(1) may be used too and offers more than the combined functionality of iconv(1), fromdos(1), todos(1), frommac(1), and tomac(1). For more, see "info recode".

### 11.1.2 Checking file to be UTF-8 with iconv

You can check if a text file is encoded in UTF-8 with iconv(1) by the following.

```
$ iconv -f utf8 -t utf8 input.txt >/dev/null || echo "non-UTF-8 found"
```

**Tip**

Use "- -verbose" option in the above example to find the first non-UTF-8 character.

### 11.1.3 Converting file names with iconv

Here is an example script to convert encoding of file names from ones created under older OS to modern UTF-8 ones in a single directory.

```
#!/bin/sh
ENCDN=iso-8859-1
for x in *;
do
  mv "$x" "$(echo "$x" | iconv -f $ENCDN -t utf-8)"
done
```

The "\$ENCDN" variable specifies the original encoding used for file names under older OS as in Table 11.2.

For more complicated case, please mount a filesystem (e.g. a partition on a disk drive) containing such file names with proper encoding as the mount(8) option (see Section 8.1.3) and copy its entire contents to another filesystem mounted as UTF-8 with "cp -a" command.

### 11.1.4 EOL conversion

The text file format, specifically the end-of-line (EOL) code, is dependent on the platform.

| platform          | EOL code | control | decimal | hexadecimal |
|-------------------|----------|---------|---------|-------------|
| Debian (unix)     | LF       | ^J      | 10      | 0A          |
| MSDOS and Windows | CR-LF    | ^M^J    | 13 10   | 0D 0A       |
| Apple's Macintosh | CR       | ^M      | 13      | 0D          |

Table 11.3: List of EOL styles for different platforms

The EOL format conversion programs, fromdos(1), todos(1), frommac(1), and tomac(1), are quite handy. recode(1) is also useful.



**Note**

Some data on the Debian system, such as the wiki page data for the `python-moinmoin` package, use MSDOS style CR-LF as the EOL code. So the above rule is just a general rule.

**Note**

Most editors (eg. `vim`, `emacs`, `gedit`, ...) can handle files in MSDOS style EOL transparently.

**Tip**

The use of `"sed -e '/\r$/!s/$/\r/'"` instead of `todos(1)` is better when you want to unify the EOL style to the MSDOS style from the mixed MSDOS and Unix style. (e.g., after merging 2 MSDOS style files with `diff3(1)`.) This is because `todos` adds CR to all lines.

### 11.1.5 TAB conversion

There are few popular specialized programs to convert the tab codes.

| function                 | bsdmainutils          | coreutils |
|--------------------------|-----------------------|-----------|
| expand tab to spaces     | <code>"col -x"</code> | expand    |
| unexpand tab from spaces | <code>"col -h"</code> | unexpand  |

Table 11.4: List of TAB conversion commands from `bsdmainutils` and `coreutils` packages

`indent(1)` from the `indent` package completely reformats whitespaces in the C program.

Editor programs such as `vim` and `emacs` can be used for TAB conversion, too. For example with `vim`, you can expand TAB with `":set expandtab"` and `":%retab"` command sequence. You can revert this with `":set noexpandtab"` and `":%retab!"` command sequence.

### 11.1.6 Editors with auto-conversion

Intelligent modern editors such as the `vim` program are quite smart and copes well with any encoding systems and any file formats. You should use these editors under the UTF-8 locale in the UTF-8 capable console for the best compatibility.

An old western European Unix text file, `"u-file.txt"`, stored in the `latin1 (iso-8859-1)` encoding can be edited simply with `vim` by the following.

```
$ vim u-file.txt
```

This is possible since the auto detection mechanism of the file encoding in `vim` assumes the UTF-8 encoding first and, if it fails, assumes it to be `latin1`.

An old Polish Unix text file, `"pu-file.txt"`, stored in the `latin2 (iso-8859-2)` encoding can be edited with `vim` by the following.

```
$ vim '+e ++enc=latin2 pu-file.txt'
```

An old Japanese unix text file, `"ju-file.txt"`, stored in the `eucJP` encoding can be edited with `vim` by the following.

```
$ vim '+e ++enc=eucJP ju-file.txt'
```

An old Japanese MS-Windows text file, `"jw-file.txt"`, stored in the so called `shift-JIS` encoding (more precisely: `CP932`) can be edited with `vim` by the following.

```
$ vim '+e ++enc=CP932 ++ff=dos jw-file.txt'
```

When a file is opened with "++enc" and "++ff" options, ":"w" in the Vim command line stores it in the original format and overwrite the original file. You can also specify the saving format and the file name in the Vim command line, e.g., ":"w ++enc=utf8 new.txt".

Please refer to the mbyte.txt "multi-byte text support" in vim on-line help and Table 11.2 for locale values used with "++enc".

The emacs family of programs can perform the equivalent functions.

### 11.1.7 Plain text extraction

The following reads a web page into a text file. This is very useful when copying configurations off the Web or applying basic Unix text tools such as grep(1) on the web page.

```
$ w3m -dump https://www.remote-site.com/help-info.html >textfile
```

Similarly, you can extract plain text data from other formats using the following.

| package                   | popcon                         | size                 | keyword       | function   |
|---------------------------|--------------------------------|----------------------|---------------|--|
| <a href="#">w3m</a>       | <a href="#">V:11, I:137</a>    | <a href="#">2853</a> | html → text   | HTML to text converter with the "w3m -dump" command    |
| <a href="#">html2text</a> | <a href="#">V:3, I:68</a>      | <a href="#">298</a>  | html → text   | advanced HTML to text converter (ISO 8859-1)           |
| <a href="#">lynx</a>      | <a href="#">V:28, I:449</a>    | <a href="#">2031</a> | html → text   | HTML to text converter with the "lynx -dump" command   |
| <a href="#">elinks</a>    | <a href="#">V:3, I:16</a>      | <a href="#">1789</a> | html → text   | HTML to text converter with the "elinks -dump" command |
| <a href="#">links</a>     | <a href="#">V:2, I:21</a>      | <a href="#">2321</a> | html → text   | HTML to text converter with the "links -dump" command  |
| <a href="#">links2</a>    | <a href="#">V:1, I:10</a>      | <a href="#">5466</a> | html → text   | HTML to text converter with the "links2 -dump" command |
| <a href="#">catdoc</a>    | <a href="#">V:15, I:171</a>    | <a href="#">682</a>  | MSWord → text | Convert MSWord files to plain text or TeX              |
| <a href="#">antiword</a>  | <a href="#">V:0.9, I:6.5</a>   | <a href="#">587</a>  | MSWord → text | Convert MSWord files to plain text or ps               |
| <a href="#">unhtml</a>    | <a href="#">V:0.04, I:0.50</a> | <a href="#">40</a>   | html → text   | remove the markup tags from an HTML file               |
| <a href="#">odt2txt</a>   | <a href="#">V:1, I:21</a>      | <a href="#">60</a>   | odt → text    | converter from OpenDocument Text to text               |

Table 11.5: List of tools to extract plain text data

### 11.1.8 Highlighting and formatting plain text data

You can highlight and format plain text data by the following.

## 11.2 XML data

The [Extensible Markup Language \(XML\)](#) is a markup language for documents containing structured information.

See introductory information at [XML.COM](#).

- ["What is XML?"](#)

| package                          | popcon                         | size                   | keyword      | description  |
|----------------------------------|--------------------------------|------------------------|--------------|--|
| <a href="#">vim-runtime</a>      | <a href="#">V:17, I:365</a>    | <a href="#">38706</a>  | highlight    | Vim MACRO to convert source code to HTML with <code>":source \$VIMRUNTIME/syntax/html.vim"</code>                            |
| <a href="#">cxref</a>            | <a href="#">V:0.03, I:0.24</a> | <a href="#">1191</a>   | c → html     | converter for the C program to latex and HTML (C language)   |
| <a href="#">src2tex</a>          | <a href="#">V:0.02, I:0.18</a> | <a href="#">1799</a>   | highlight    | convert many source codes to TeX (C language)  |
| <a href="#">source-highlight</a> | <a href="#">V:0.5, I:3.2</a>   | <a href="#">2131</a>   | highlight    | convert many source codes to HTML, XHTML, LaTeX, Texinfo, ANSI color escape sequences and DocBook files with highlight (C++) |
| <a href="#">highlight</a>        | <a href="#">V:0.4, I:3.1</a>   | <a href="#">1411</a>   | highlight    | convert many source codes to HTML, XHTML, RTF, LaTeX, TeX or XSL-FO files with highlight (C++)                               |
| <a href="#">grc</a>              | <a href="#">V:1.0, I:6.0</a>   | <a href="#">208</a>    | text → color | generic colouriser for everything (Python)   |
| <a href="#">pandoc</a>           | <a href="#">V:10, I:48</a>     | <a href="#">208068</a> | text → any   | general markup converter (Haskell)   |
| <a href="#">python3-docutils</a> | <a href="#">V:12, I:52</a>     | <a href="#">2009</a>   | text → any   | ReStructured Text document formatter to XML (Python)   |
| <a href="#">markdown</a>         | <a href="#">V:0.5, I:6.0</a>   | <a href="#">56</a>     | text → html  | Markdown text document formatter to (X)HTML (Perl)   |
| <a href="#">asciidoc</a>         | <a href="#">V:0.4, I:4.8</a>   | <a href="#">101</a>    | text → any   | AsciiDoc text document formatter to XML/HTML (Ruby)  |
| <a href="#">python3-sphinx</a>   | <a href="#">V:6, I:27</a>      | <a href="#">3235</a>   | text → any   | ReStructured Text based document publication system (Python)   |
| <a href="#">hugo</a>             | <a href="#">V:0.8, I:5.1</a>   | <a href="#">66608</a>  | text → html  | Markdown based static site publication system (Go)   |

Table 11.6: List of tools to highlight plain text data

- ["What Is XSLT?"](#)
- ["What Is XSL-FO?"](#)
- ["What Is XLink?"](#)

### 11.2.1 Basic hints for XML

XML text looks somewhat like [HTML](#). It enables us to manage multiple formats of output for a document. One easy XML system is the `docbook-xsl` package, which is used here.

Each XML file starts with standard XML declaration as the following.

```
<?xml version="1.0" encoding="UTF-8"?>
```

The basic syntax for one XML element is marked up as the following.

```
<name attribute="value">content</name>
```

XML element with empty content is marked up in the following short form.

```
<name attribute="value" />
```

The `"attribute="value"` in the above examples are optional.

The comment section in XML is marked up as the following.

```
<!-- comment -->
```

| predefined entity | character to be converted into |
|-------------------|--------------------------------|
| &quot;;           | " : quote                      |
| &apos;;           | ' : apostrophe                 |
| &lt;;             | < : less-than                  |
| &gt;;             | > : greater-than               |
| &amp;;            | & : ampersand                  |

Table 11.7: List of predefined entities for XML

Other than adding markups, XML requires minor conversion to the content using predefined entities for following characters.

**Caution**

"<" or "&" can not be used in attributes or elements.

---

**Note**

When SGML style user defined entities, e.g. "&some-tag;", are used, the first definition wins over others. The entity definition is expressed in "<!ENTITY some-tag "entity value">".

---

**Note**

As long as the XML markup are done consistently with certain set of the tag name (either some data as content or attribute value), conversion to another XML is trivial task using [Extensible Stylesheet Language Transformations \(XSLT\)](#).

---

### 11.2.2 XML processing

There are many tools available to process XML files such as [the Extensible Stylesheet Language \(XSL\)](#).

Basically, once you create well formed XML file, you can convert it to any format using [Extensible Stylesheet Language Transformations \(XSLT\)](#).

The [Extensible Stylesheet Language for Formatting Objects \(XSL-FO\)](#) is supposed to be solution for formatting. The fop package is new to the Debian main archive due to its dependence to the [Java programming language](#). So the LaTeX code is usually generated from XML using XSLT and the LaTeX system is used to create printable file such as DVI, PostScript, and PDF.

Since XML is subset of [Standard Generalized Markup Language \(SGML\)](#), it can be processed by the extensive tools available for SGML, such as [Document Style Semantics and Specification Language \(DSSSL\)](#).

**Tip**

[GNOME](#)'s `ye1p` is sometimes handy to read [DocBook](#) XML files directly since it renders decently on X.

---

### 11.2.3 The XML data extraction

You can extract HTML or XML data from other formats using followings.

---

| package                     | popcon                         | size                  | keyword    | description  |
|-----------------------------|--------------------------------|-----------------------|------------|--|
| <a href="#">docbook-xml</a> | <a href="#">V:15, I:409</a>    | <a href="#">2126</a>  | xml        | XML document type definition (DTD) for DocBook                                 |
| <a href="#">docbook-xsl</a> | <a href="#">V:14, I:145</a>    | <a href="#">14823</a> | xml/xslt   | XSL stylesheets for processing DocBook XML to various output formats with XSLT |
| <a href="#">xsltproc</a>    | <a href="#">V:16, I:73</a>     | <a href="#">83</a>    | xslt       | XSLT command line processor (XML → XML, HTML, plain text, etc.)                |
| <a href="#">xmlto</a>       | <a href="#">V:0.5, I:8.6</a>   | <a href="#">124</a>   | xml/xslt   | XML-to-any converter with XSLT   |
| <a href="#">fop</a>         | <a href="#">V:0.7, I:8.1</a>   | <a href="#">281</a>   | xml/xsl-fo | convert Docbook XML files to PDF   |
| <a href="#">dblatex</a>     | <a href="#">V:0.9, I:5.8</a>   | <a href="#">4636</a>  | xml/xslt   | convert Docbook files to DVI, PostScript, PDF documents with XSLT              |
| <a href="#">dbtoepub</a>    | <a href="#">V:0.05, I:0.51</a> | <a href="#">37</a>    | xml/xslt   | DocBook XML to .epub converter   |

Table 11.8: List of XML tools

| package                       | popcon                       | size                 | keyword   | description  |
|-------------------------------|------------------------------|----------------------|-----------|--|
| <a href="#">openjade</a>      | <a href="#">V:1, I:22</a>    | <a href="#">1066</a> | dsssl     | ISO/IEC 10179:1996 standard DSSSL processor (latest)   |
| <a href="#">docbook-dsssl</a> | <a href="#">V:0.5, I:7.9</a> | <a href="#">2594</a> | xml/dsssl | DSSSL stylesheets for processing DocBook XML to various output formats with DSSSL  |
| <a href="#">docbook-utils</a> | <a href="#">V:0.4, I:5.6</a> | <a href="#">287</a>  | xml/dsssl | utilities for DocBook files including conversion to other formats (HTML, RTF, PS, man, PDF) with docbook2* commands with DSSSL |

Table 11.9: List of DSSSL tools

| package                   | popcon                         | size                 | keyword           | description  |
|---------------------------|--------------------------------|----------------------|-------------------|--|
| <a href="#">man2html</a>  | <a href="#">V:0.1, I:1.3</a>   | <a href="#">142</a>  | manpage → html    | converter from manpage to HTML (CGI support)                     |
| <a href="#">doclifter</a> | <a href="#">V:0.01, I:0.05</a> | <a href="#">487</a>  | troff → xml       | converter from troff to DocBook XML                              |
| <a href="#">texi2html</a> | <a href="#">V:0.2, I:3.0</a>   | <a href="#">1847</a> | texi → html       | converter from Texinfo to HTML                                   |
| <a href="#">info2www</a>  | <a href="#">V:0.9, I:1.5</a>   | <a href="#">76</a>   | info → html       | converter from GNU info to HTML (CGI support)                    |
| <a href="#">wv</a>        | <a href="#">V:0.2, I:2.5</a>   | <a href="#">733</a>  | MSWord → any      | document converter from Microsoft Word to HTML, LaTeX, etc.      |
| <a href="#">unrtf</a>     | <a href="#">V:0.3, I:2.9</a>   | <a href="#">159</a>  | rtf → html        | document converter from RTF to HTML, etc                         |
| <a href="#">wp2x</a>      | <a href="#">V:0.01, I:0.09</a> | <a href="#">200</a>  | WordPerfect → any | WordPerfect 5.0 and 5.1 files to TeX, LaTeX, troff, GML and HTML |

Table 11.10: List of XML data extraction tools

### 11.2.4 The XML data lint

For non-XML HTML files, you can convert them to XHTML which is an instance of well formed XML. XHTML can be processed by XML tools.

Syntax of XML files and goodness of URLs found in them may be checked.

| package                       | popcon                         | size                | function           | description  |
|-------------------------------|--------------------------------|---------------------|--------------------|--|
| <a href="#">libxml2-utils</a> | <a href="#">V:62, I:209</a>    | <a href="#">211</a> | xml ↔ html ↔ xhtml | command line XML tool with <code>xmllint(1)</code> (syntax check, reformat, lint, ...) |
| <a href="#">tidy</a>          | <a href="#">V:0.9, I:7.4</a>   | <a href="#">79</a>  | xml ↔ html ↔ xhtml | HTML syntax checker and reformatter  |
| <a href="#">weblint-perl</a>  | <a href="#">V:0.06, I:0.92</a> | <a href="#">32</a>  | lint               | syntax and minimal style checker for HTML  |
| <a href="#">linklint</a>      | <a href="#">V:0.06, I:0.47</a> | <a href="#">343</a> | link check         | fast link checker and web site maintenance tool  |

Table 11.11: List of XML pretty print tools

Once proper XML is generated, you can use XSLT technology to extract data based on the mark-up context etc.

## 11.3 Type setting

The Unix [troff](#) program originally developed by AT&T can be used for simple typesetting. It is usually used to create manpages.

[TeX](#) created by Donald Knuth is a very powerful type setting tool and is the de facto standard. [LaTeX](#) originally written by Leslie Lamport enables a high-level access to the power of TeX.

| package                 | popcon                    | size                  | keyword | description   |
|-------------------------|---------------------------|-----------------------|---------|---|
| <a href="#">texlive</a> | <a href="#">V:1, I:28</a> | <a href="#">55</a>    | (La)TeX | TeX system for typesetting, previewing and printing |
| <a href="#">groff</a>   | <a href="#">V:2, I:24</a> | <a href="#">16514</a> | troff   | GNU troff text-formatting system                    |

Table 11.12: List of type setting tools

### 11.3.1 roff typesetting

Traditionally, [roff](#) is the main Unix text processing system. See `roff(7)`, `groff(7)`, `groff(1)`, `grotty(1)`, `troff(1)`, `groff_md(7)`, `groff_man(7)`, `groff_ms(7)`, `groff_me(7)`, `groff_mm(7)`, and "info groff".

You can read or print a good tutorial and reference on "-me" [macro](#) in "/usr/share/doc/groff/" by installing the groff package.

---

#### Tip

"`groff -Tascii -me -`" produces plain text output with [ANSI escape code](#). If you wish to get manpage like output with many "^H" and "\_", use "`GROFF_NO_SGR=1 groff -Tascii -me -`" instead.

---



---

#### Tip

To remove "^H" and "\_" from a text file generated by groff, filter it by "`col -b -x`".

---

### 11.3.2 TeX/LaTeX

The [TeX Live](#) software distribution offers a complete TeX system. The `texlive` metapackage provides a decent selection of the [TeX Live](#) packages which should suffice for the most common tasks.

There are many references available for [TeX](#) and [LaTeX](#).

- [The teTeX HOWTO: The Linux-teTeX Local Guide](#)
- `tex(1)`
- `latex(1)`
- `texdoc(1)`
- `texdoctk(1)`
- "The TeXbook", by Donald E. Knuth, (Addison-Wesley)
- "LaTeX - A Document Preparation System", by Leslie Lamport, (Addison-Wesley)
- "The LaTeX Companion", by Goossens, Mittelbach, Samarin, (Addison-Wesley)

This is the most powerful typesetting environment. Many [SGML](#) processors use this as their back end text processor. [Lyx](#) provided by the `lyx` package and [GNU TeXmacs](#) provided by the `texmacs` package offer nice [WYSIWYG](#) editing environment for [LaTeX](#) while many use [Emacs](#) and [Vim](#) as the choice for the source editor.

There are many online resources available.

- The TEX Live Guide - TEX Live 2007 ("`/usr/share/doc/texlive-doc-base/english/texlive-en/live.html`") (`texlive-doc-base` package)
- [A Simple Guide to Latex/Lyx](#)
- [Word Processing Using LaTeX](#)

When documents become bigger, sometimes TeX may cause errors. You must increase pool size in "`/etc/texmf/texmf.d`" (or more appropriately edit "`/etc/texmf/texmf.d/95NonPath`" and run `update-texmf(8)`) to fix this.

---

**Note**

The TeX source of "The TeXbook" is available at [www.ctan.org/tex-archive/site/texbook.tex](http://www.ctan.org/tex-archive/site/texbook.tex). This file contains most of the required macros. I heard that you can process this document with `tex(1)` after commenting lines 7 to 10 and adding "`\input manmac \proofmodefalse`". It's strongly recommended to buy this book (and all other books from Donald E. Knuth) instead of using the online version but the source is a great example of TeX input!

---

### 11.3.3 Pretty print a manual page

You can print a manual page in PostScript nicely by one of the following commands.

```
$ man -Tps some_manpage | lpr
```

### 11.3.4 Creating a manual page

Although writing a manual page (`manpage`) in the plain [troff](#) format is possible, there are few helper packages to create it.

---

| package                        | popcon         | size | keyword        | description                                      |
|--------------------------------|----------------|------|----------------|--|
| <a href="#">docbook-to-man</a> | V:0.6, I:5.6   | 189  | SGML → manpage | converter from DocBook SGML into roff man macros |
| <a href="#">help2man</a>       | V:0.6, I:6.3   | 542  | text → manpage | automatic manpage generator from --help          |
| <a href="#">info2man</a>       | V:0.01, I:0.19 | 134  | info → manpage | converter from GNU info to POD or man pages      |
| <a href="#">txt2man</a>        | V:0.05, I:0.64 | 112  | text → manpage | convert flat ASCII text to man page format       |

Table 11.13: List of packages to help creating the manpage

## 11.4 Printable data

Printable data is expressed in the [PostScript](#) format on the Debian system. [Common Unix Printing System \(CUPS\)](#) uses Ghostscript as its rasterizer backend program for non-PostScript printers.

Printable data may also be expressed in the [PDF](#) format on the recent Debian system.

PDF files can displayed and its form entries may be filled using GUI viewer tools such as [Evince](#) and [Okular](#) (see [Section 7.4](#)); and modern browsers such as [Chromium](#).

PDF files can be edited using some graphics tools such as [LibreOffice](#), [Scribus](#), and [Inkscape](#) (see [Section 11.6](#)).

### Tip

You can read a PDF file with [GIMP](#) and convert it into [PNG](#) format using higher than 300 dpi resolution. This may be used as a background image for [LibreOffice](#) to produce a desirable altered printout with minimum efforts.

### 11.4.1 Ghostscript

The core of printable data manipulation is the [Ghostscript PostScript \(PS\)](#) interpreter which generates raster image.

| package                             | popcon       | size  | description  |
|-------------------------------------|--------------|-------|--|
| <a href="#">ghostscript</a>         | V:143, I:564 | 177   | <a href="#">The GPL Ghostscript PostScript/PDF interpreter</a>             |
| <a href="#">ghostscript-x</a>       | V:0, I:15    | 88    | GPL Ghostscript PostScript/PDF interpreter - X display support             |
| <a href="#">libpoppler156</a>       | V:9, I:15    | 4989  | PDF rendering library forked from the xpdf PDF viewer                      |
| <a href="#">libpoppler-glib8t64</a> | V:68, I:297  | 576   | PDF rendering library (GLib-based shared library)                          |
| <a href="#">poppler-data</a>        | V:151, I:585 | 13086 | CMaps for PDF rendering library (for <a href="#">CJK</a> support: Adobe-*) |

Table 11.14: List of Ghostscript PostScript interpreters

### Tip

"gs -h" can display the configuration of Ghostscript.

### 11.4.2 Merge two PS or PDF files

You can merge two [PostScript \(PS\)](#) or [Portable Document Format \(PDF\)](#) files using gs(1) of Ghostscript.

```
$ gs -q -dNOPAUSE -dBATCH -sDEVICE=pswrite -sOutputFile=bla.ps -f foo1.ps foo2.ps
$ gs -q -dNOPAUSE -dBATCH -sDEVICE=pdfwrite -sOutputFile=bla.pdf -f foo1.pdf foo2.pdf
```



**Note**

The [PDF](#), which is a widely used cross-platform printable data format, is essentially the compressed [PS](#) format with few additional features and extensions.

**Tip**

For command line, `psmerge(1)` and other commands from the `psutils` package are useful for manipulating PostScript documents. `pdftk(1)` from the `pdftk` package is useful for manipulating PDF documents, too.

### 11.4.3 Printable data utilities

The following packages for the printable data utilities caught my eyes.

| package                       | popcon                         | size                 | keyword              | description  |
|-------------------------------|--------------------------------|----------------------|----------------------|--|
| <a href="#">poppler-utils</a> | <a href="#">V:106, I:474</a>   | <a href="#">756</a>  | pdf → ps, text, ...  | PDF utilities: <code>pdftops</code> , <code>pdfinfo</code> , <code>pdfimages</code> , <code>pdftotext</code> , <code>pdffonts</code> |
| <a href="#">psutils</a>       | <a href="#">V:4, I:51</a>      | <a href="#">34</a>   | ps → ps              | PostScript document conversion tools   |
| <a href="#">poster</a>        | <a href="#">V:0.1, I:1.7</a>   | <a href="#">57</a>   | ps → ps              | create large posters out of PostScript pages   |
| <a href="#">enscript</a>      | <a href="#">V:1, I:11</a>      | <a href="#">2138</a> | text → ps, html, rtf | convert ASCII text to PostScript, HTML, RTF or Pretty-Print  |
| <a href="#">a2ps</a>          | <a href="#">V:0.7, I:7.0</a>   | <a href="#">4109</a> | text → ps            | 'Anything to PostScript' converter and pretty-printer  |
| <a href="#">pdftk</a>         | <a href="#">V:1, I:22</a>      | <a href="#">28</a>   | pdf → pdf            | PDF document conversion tool: <code>pdftk</code>   |
| <a href="#">html2ps</a>       | <a href="#">V:0.1, I:1.7</a>   | <a href="#">256</a>  | html → ps            | converter from HTML to PostScript  |
| <a href="#">gnuhtml2latex</a> | <a href="#">V:0.05, I:0.58</a> | <a href="#">26</a>   | html → latex         | converter from html to latex   |
| <a href="#">latex2rtf</a>     | <a href="#">V:0.1, I:2.1</a>   | <a href="#">495</a>  | latex → rtf          | convert documents from LaTeX to RTF which can be read by MS Word   |
| <a href="#">ps2eps</a>        | <a href="#">V:1, I:33</a>      | <a href="#">95</a>   | ps → eps             | converter from PostScript to EPS (Encapsulated PostScript)   |
| <a href="#">e2ps</a>          | <a href="#">V:0.01, I:0.11</a> | <a href="#">104</a>  | text → ps            | Text to PostScript converter with Japanese encoding support  |
| <a href="#">impose+</a>       | <a href="#">V:0.1, I:1.5</a>   | <a href="#">118</a>  | ps → ps              | PostScript utilities   |
| <a href="#">trueprint</a>     | <a href="#">V:0.01, I:0.09</a> | <a href="#">148</a>  | text → ps            | pretty print many source codes (C, C++, Java, Pascal, Perl, Pike, Sh, and Verilog) to PostScript. (C language)                       |
| <a href="#">pdf2svg</a>       | <a href="#">V:0.2, I:3.0</a>   | <a href="#">33</a>   | pdf → svg            | converter from PDF to <a href="#">Scalable vector graphics</a> format  |
| <a href="#">pdftoipe</a>      | <a href="#">V:0.02, I:0.47</a> | <a href="#">70</a>   | pdf → ipe            | converter from PDF to IPE's XML format   |

Table 11.15: List of printable data utilities

### 11.4.4 Printing with CUPS

Both `lp(1)` and `lpr(1)` commands offered by [Common Unix Printing System \(CUPS\)](#) provides options for customized printing the printable data.

You can print 3 copies of a file collated using one of the following commands.

```
$ lp -n 3 -o Collate=True filename
```

```
$ lpr -#3 -o Collate=True filename
```

You can further customize printer operation by using printer option such as "-o number-up=2", "-o page-set=even", "-o page-set=odd", "-o scaling=200", "-o natural-scaling=200", etc., documented at [Command-Line Printing and Options](#).

## 11.5 The mail data conversion

The following packages for the mail data conversion caught my eyes.

| package                   | popcon       | size | keyword | description   |
|---------------------------|--------------|------|---------|---|
| <a href="#">sharutils</a> | V:2, I:29    | 1436 | mail    | shar(1), unshar(1), uuencode(1), uudecode(1)  |
| <a href="#">mpack</a>     | V:0.9, I:8.0 | 109  | MIME    | encoding and decoding of <a href="#">MIME</a> messages: mpack(1) and munpack(1)   |
| <a href="#">tnef</a>      | V:0.4, I:4.1 | 103  | ms-tnef | unpacking <a href="#">MIME</a> attachments of type "application/ms-tnef" which is a Microsoft only format   |
| <a href="#">uudeview</a>  | V:0.2, I:1.8 | 105  | mail    | encoder and decoder for the following formats: <a href="#">uuencode</a> , <a href="#">xxencode</a> , <a href="#">BASE64</a> , <a href="#">quoted printable</a> , and <a href="#">BinHex</a> |

Table 11.16: List of packages to help mail data conversion

---

### Tip

The [Internet Message Access Protocol](#) version 4 (IMAP4) server may be used to move mails out from proprietary mail systems if the mail client software can be configured to use IMAP4 server too.

---

### 11.5.1 Mail data basics

Mail ([SMTP](#)) data should be limited to series of 7 bit data. So binary data and 8 bit text data are encoded into 7 bit format with the [Multipurpose Internet Mail Extensions \(MIME\)](#) and the selection of the charset (see [Table 11.2](#)).

The standard mail storage format is mbox formatted according to [RFC2822 \(updated RFC822\)](#). See mbox(5) (provided by the `mutt` package).

For European languages, "Content-Transfer-Encoding: quoted-printable" with the ISO-8859-1 charset is usually used for mail since there are not much 8 bit characters. If European text is encoded in UTF-8, "Content-Transfer-Encoding: quoted-printable" is likely to be used since it is mostly 7 bit data.

For Japanese, traditionally "Content-Type: text/plain; charset=ISO-2022-JP" is usually used for mail to keep text in 7 bits. But older Microsoft systems may send mail data in Shift-JIS without proper declaration. If Japanese text is encoded in UTF-8, [Base64](#) is likely to be used since it contains many 8 bit data. The situation of other Asian languages is similar.

---

### Note

If your non-Unix mail data is accessible by a non-Debian client software which can talk to the IMAP4 server, you may be able to move them out by running your own IMAP4 server.

---

**Note**

If you use other mail storage formats, moving them to mbox format is the good first step. The versatile client program such as `mutt(1)` may be handy for this.

You can split mailbox contents to each message using `procmail(1)` and `formail(1)`.

Each mail message can be unpacked using `munpack(1)` from the `mpack` package (or other specialized tools) to obtain the MIME encoded contents.

## 11.6 Graphic data tools

Although GUI programs such as `gimp(1)` are very powerful, command line tools such as `imagemagick(1)` are quite useful for automating image manipulation via scripts.

The de facto image file format of the digital camera is the [Exchangeable Image File Format](#) (EXIF) which is the [JPEG](#) image file format with additional metadata tags. It can hold information such as date, time, and camera settings.

The [Lempel-Ziv-Welch \(LZW\) lossless data compression](#) patent has been expired. [Graphics Interchange Format \(GIF\)](#) utilities which use the LZW compression method are now freely available on the Debian system.

**Tip**

Any digital camera or scanner with removable recording media works with Linux through [USB storage](#) readers since it follows the [Design rule for Camera Filesystem](#) and uses [FAT](#) filesystem. See [Section 10.1.7](#).

### 11.6.1 Graphic data tools (metapackage)

The following metapackages are good starting points for searching graphics data tools using `aptitude(8)`. "[Packages overview for Debian PhotoTools Maintainers](#)" can be another starting point.

| package                                  | popcon | size | keyword        | description   |
|--|--------|------|----------------|---|
| <a href="#">education-graphics</a>       | 1:0.35 | 25   | svg, jpeg, ... | metapackage for teaching graphics and pictural art. |
| <a href="#">open-font-design-toolkit</a> | 1:0.04 | 9    | ttf, ps, ...   | metapackage for open font design                    |

Table 11.17: List of graphics data tools (metapackage)

**Tip**

Search more image tools using regex `"~Gworks-with::image"` in `aptitude(8)` (see [Section 2.2.6](#)).

### 11.6.2 Graphic data tools (GUI)

The following packages for the GUI graphics data conversion, editing, and organization tools caught my eyes.

### 11.6.3 Graphic data tools (CLI)

The following packages for the CLI graphics data conversion, editing, and organization tools caught my eyes.

| package                          | popcon         | size   | keyword                | description  |
|----------------------------------|----------------|--------|------------------------|--|
| <a href="#">gimp</a>             | V:44, I:217    | 32791  | image(bitmap)          | GNU Image Manipulation Program                                     |
| <a href="#">xsane</a>            | V:9, I:129     | 1512   | image(bitmap)          | GTK-based X11 frontend for SANE (Scanner Access Now Easy)          |
| <a href="#">scribus</a>          | V:1, I:13      | 32423  | ps/pdf/SVG/...         | <a href="#">Scribus</a> DTP editor                                 |
| <a href="#">libreoffice-draw</a> | V:83, I:418    | 10995  | image(vector)          | LibreOffice office suite - drawing                                 |
| <a href="#">inkscape</a>         | V:12, I:79     | 112538 | image(vector)          | <a href="#">SVG (Scalable Vector Graphics)</a> editor              |
| <a href="#">dia</a>              | V:1, I:17      | 3802   | image(vector)          | diagram editor (Gtk)   |
| <a href="#">xfig</a>             | V:0.6, I:8.9   | 7951   | image(vector)          | Facility for Interactive Generation of figures under X11           |
| <a href="#">gocr</a>             | V:0.5, I:3.9   | 549    | image → text           | free OCR software  |
| <a href="#">eog</a>              | V:26, I:143    | 10524  | image(Exif)            | Eye of GNOME graphics viewer program                               |
| <a href="#">gthumb</a>           | V:3, I:12      | 5162   | image(Exif)            | image viewer and browser (GNOME)                                   |
| <a href="#">geeqie</a>           | V:3, I:11      | 2872   | image(Exif)            | image viewer using GTK   |
| <a href="#">shotwell</a>         | V:14, I:246    | 6334   | image(Exif)            | digital photo organizer (GNOME)                                    |
| <a href="#">gwenview</a>         | V:40, I:115    | 6000   | image(Exif)            | image viewer (KDE)   |
| <a href="#">kamera</a>           | I:114          | 992    | image(Exif)            | digital camera support for KDE applications                        |
| <a href="#">digikam</a>          | V:1.5, I:8.4   | 324    | image(Exif)            | digital photo management application for KDE                       |
| <a href="#">darktable</a>        | V:4, I:11      | 35876  | image(Exif)            | virtual lighttable and darkroom for photographers                  |
| <a href="#">hugin</a>            | V:0.5, I:5.6   | 6476   | image(Exif)            | panorama photo stitcher  |
| <a href="#">librecad</a>         | V:1, I:14      | 9164   | DXF, ...               | 2D CAD data editor   |
| <a href="#">freecad</a>          | V:1, I:21      | 112    | DXF, ...               | 3D CAD data editor   |
| <a href="#">blender</a>          | V:2, I:20      | 92911  | blend, TIFF, VRML, ... | 3D content editor for animation etc                                |
| <a href="#">mm3d</a>             | V:0.02, I:0.21 | 4123   | ms3d, obj, dxf, ...    | OpenGL based 3D model editor                                       |
| <a href="#">fontforge</a>        | V:0.6, I:5.6   | 4054   | ttf, ps, ...           | font editor for PS, TrueType and OpenType fonts                    |
| <a href="#">xgridfit</a>         | V:0.00, I:0.08 | 878    | ttf                    | program for <a href="#">gridfitting and hinting</a> TrueType fonts |

Table 11.18: List of graphics data tools (GUI)

| package                           | popcon         | size | keyword                | description   |
|-----------------------------------|----------------|------|------------------------|---|
| <a href="#">imagemagick</a>       | V:9, I:279     | 79   | image(bitmap)          | image manipulation programs   |
| <a href="#">graphicsmagick</a>    | V:1.0, I:8.6   | 5816 | image(bitmap)          | image manipulation programs (fork of <a href="#">imagemagick</a> )  |
| <a href="#">netpbm</a>            | V:27, I:289    | 8435 | image(bitmap)          | graphics conversion tools   |
| <a href="#">libheif-examples</a>  | V:0.3, I:3.5   | 438  | heif → jpeg(bitmap)    | convert <a href="#">High Efficiency Image File Format (HEIF)</a> JPEG, PNG, or Y4M formats with <a href="#">heif-conver</a> (1) command |
| <a href="#">icoutils</a>          | V:3, I:34      | 221  | png ↔ ico(bitmap)      | convert <a href="#">MS Windows icons and cursors to and from PNG formats (favicon.ico)</a>  |
| <a href="#">pstoedit</a>          | V:2, I:39      | 1075 | ps/pdf → image(vector) | PostScript and PDF files to editable vector graphics converter (SVG)  |
| <a href="#">libwmf-bin</a>        | V:5, I:83      | 149  | Windows/image(vector)  | Windows metafile (vector graphics data) conversion tools  |
| <a href="#">fig2sxd</a>           | V:0.03, I:0.18 | 158  | fig → sxd(vector)      | convert XFig files to OpenOffice.org Draw format  |
| <a href="#">unpaper</a>           | V:2, I:16      | 417  | image → image          | post-processing tool for scanned pages for <a href="#">OCR</a>  |
| <a href="#">tesseract-ocr</a>     | V:8, I:33      | 2209 | image → text           | free <a href="#">OCR</a> software based on the HP's commercial OCR engine   |
| <a href="#">tesseract-ocr-eng</a> | V:8, I:33      | 4032 | image → text           | OCR engine data: tesseract-ocr language files for English text  |
| <a href="#">ocrad</a>             | V:0.3, I:2.4   | 608  | image → text           | free OCR software   |
| <a href="#">exif</a>              | V:3, I:51      | 335  | image(Exif)            | command-line utility to show EXIF information in JPEG files   |
| <a href="#">exiv2</a>             | V:2, I:19      | 429  | image(Exif)            | EXIF/IPTC metadata manipulation tool  |
| <a href="#">exiftran</a>          | V:1, I:11      | 81   | image(Exif)            | transform digital camera jpeg images  |
| <a href="#">exiftags</a>          | V:0.3, I:2.7   | 309  | image(Exif)            | utility to read Exif tags from a digital camera JPEG file   |
| <a href="#">exifprobe</a>         | V:0.2, I:2.1   | 506  | image(Exif)            | read metadata from digital pictures   |
| <a href="#">dcraw</a>             | V:0.8, I:7.3   | 428  | image(Raw) → png       | decode raw digital camera images  |
| <a href="#">findimagedupes</a>    | V:0.1, I:1.1   | 75   | image → fingerprint    | find visually similar or duplicate images   |
| <a href="#">ale</a>               | V:0.02, I:0.15 | 850  | image → image          | merge images to increase fidelity or create mosaics   |
| <a href="#">imageindex</a>        | V:0.2, I:1.2   | 143  | image(Exif) → html     | generate static HTML galleries from images  |
| <a href="#">outguess</a>          | V:0.1, I:1.0   | 230  | jpeg,png               | universal <a href="#">Steganographic</a> tool   |
| <a href="#">jpegoptim</a>         | V:0.6, I:6.0   | 59   | jpeg                   | optimize <a href="#">JPEG</a> files   |
| <a href="#">optipng</a>           | V:2, I:40      | 187  | png                    | optimize <a href="#">PNG</a> files, lossless compression  |
| <a href="#">pngquant</a>          | V:1, I:10      | 62   | png                    | optimize <a href="#">PNG</a> files, lossy compression   |

Table 11.19: List of graphics data tools (CLI)

## 11.7 Miscellaneous data conversion

There are many other programs for converting data. Following packages caught my eyes using regex "~Guse : : converting in aptitude(8) (see Section 2.2.6).

| package                   | popcon                         | size                  | keyword       | description  |
|---------------------------|--------------------------------|-----------------------|---------------|--|
| <a href="#">alien</a>     | <a href="#">V:1, I:13</a>      | <a href="#">150</a>   | rpm/tgz → deb | converter for the foreign package into the Debian package  |
| <a href="#">freepwing</a> | <a href="#">V:0.00, I:0.02</a> | <a href="#">447</a>   | EB → EPWING   | converter from "Electric Book" (popular in Japan) to a single <a href="#">JIS X 4081</a> format (a subset of the <a href="#">EPWING V1</a> ) |
| <a href="#">calibre</a>   | <a href="#">V:7, I:24</a>      | <a href="#">65193</a> | any → EPUB    | e-book converter and library management  |

Table 11.20: List of miscellaneous data conversion tools

You can also extract data from RPM format with the following.

```
$ rpm2cpio file.src.rpm | cpio --extract
```

## Chapter 12

# Programming

I provide some pointers for people to learn programming on the Debian system enough to trace the packaged source code. Here are notable packages and corresponding documentation packages for programming.

Online references are available by typing "man name" after installing manpages and manpages-dev packages. Online references for the GNU tools are available by typing "info program\_name" after installing the pertinent documentation packages. You may need to include the contrib and non-free archives in addition to the main archive since some GFDL documentations are not considered to be DFSG compliant.

Please consider to use version control system tools. See Section [10.5](#).



### Warning

Do not use "test" as the name of an executable test file. "test" is a shell builtin.

---



### Caution

You should install software programs directly compiled from source into "/usr/local" or "/opt" to avoid collision with system programs.

---

### Tip

[Code examples of creating "Song 99 Bottles of Beer"](#) should give you good ideas of practically all the programming languages.

---

## 12.1 The shell script

The [shell script](#) is a text file with the execution bit set and contains the commands in the following format.

```
#!/bin/sh
... command lines
```

The first line specifies the shell interpreter which read and execute this file contents.

Reading shell scripts is the **best** way to understand how a Unix-like system works. Here, I give some pointers and reminders for shell programming. See "Shell Mistakes" (<https://www.greenend.org.uk/rjk/2001/04/shell.html>) to learn from mistakes.

Unlike shell interactive mode (see Section [1.5](#) and Section [1.6](#)), shell scripts frequently use parameters, conditionals, and loops.

---

12.1.1 POSIX shell compatibility

Many system scripts may be interpreted by any one of [POSIX](#) shells (see [Table 1.13](#)).

- The default non-interactive POSIX shell `/usr/bin/sh` is a symlink pointing to `/usr/bin/dash` and used by many system programs.
- The default interactive POSIX shell is `/usr/bin/bash`.

Avoid writing a shell script with **bashisms** or **zshisms** to make it portable among all POSIX shells. You can check it using `checkbashisms(1)`.

| Good: POSIX                                      | Avoid: bashism                                    |
|--|---|
| <code>if [ "\$foo" = "\$bar" ] ; then ...</code> | <code>if [ "\$foo" == "\$bar" ] ; then ...</code> |
| <code>diff -u file.c.orig file.c</code>          | <code>diff -u file.c{.orig,}</code>               |
| <code>mkdir /foobar /foobaz</code>               | <code>mkdir /foo{bar,baz}</code>                  |
| <code>funcname() { ... }</code>                  | <code>function funcname() { ... }</code>          |
| octal format: <code>"\377"</code>                | hexadecimal format: <code>"\xff"</code>           |

Table 12.1: List of typical bashisms

The `"echo"` command must be used with following cares since its implementation differs among shell builtin and external commands.

- Avoid using any command options except `"-n"`.
- Avoid using escape sequences in the string since their handling varies.

**Note**  
Although `"-n"` option is **not** really POSIX syntax, it is generally accepted.

**Tip**  
Use the `"printf"` command instead of the `"echo"` command if you need to embed escape sequences in the output string.

12.1.2 Shell parameters

Special shell parameters are frequently used in the shell script.

Basic **parameter expansions** to remember are as follows.

Here, the colon `":"` in all of these operators is actually optional.

- **with** `":"` = operator test for **exist** and **not null**
- **without** `":"` = operator test for **exist** only



| shell parameter | value                                       |
|-----------------|---|
| \$0             | name of the shell or shell script           |
| \$1             | first (1st) shell argument                  |
| \$9             | ninth (9th) shell argument                  |
| \$#             | number of positional parameters             |
| "\$*"           | "\$1 \$2 \$3 \$4 ... "                      |
| "\$@"           | "\$1" "\$2" "\$3" "\$4" ...                 |
| \$?             | exit status of the most recent command      |
| \$\$            | PID of this shell script                    |
| \$_             | PID of most recently started background job |

Table 12.2: List of shell parameters

| parameter expression form | value if var is set | value if var is not set                              |
|---------------------------|---------------------|--|
| \${var:-string}           | "\$var"             | "string"   |
| \${var:+string}           | "string"            | "null"   |
| \${var:=string}           | "\$var"             | "string" (and run "var=string")                      |
| \${var:?string}           | "\$var"             | echo "string" to <b>stderr</b> (and exit with error) |

Table 12.3: List of shell parameter expansions

| parameter substitution form | result                         |
|-----------------------------|--------------------------------|
| \${var%suffix}              | remove smallest suffix pattern |
| \${var%%suffix}             | remove largest suffix pattern  |
| \${var#prefix}              | remove smallest prefix pattern |
| \${var##prefix}             | remove largest prefix pattern  |

Table 12.4: List of key shell parameter substitutions

### 12.1.3 Shell conditionals

Each command returns an **exit status** which can be used for conditional expressions.

- Success: 0 ("True")
- Error: non 0 ("False")

---

#### Note

"0" in the shell conditional context means "True", while "0" in the C conditional context means "False".

---



---

#### Note

"[" is the equivalent of the `test` command, which evaluates its arguments up to "]" as a conditional expression.

---

Basic **conditional idioms** to remember are the following.

- `"command && if_success_run_this_command_too || true"`
- `"command || if_not_success_run_this_command_too || true"`
- A multi-line script snippet as the following

```
if [ conditional_expression ]; then
    if_success_run_this_command
else
    if_not_success_run_this_command
fi
```

Here trailing `"|| true"` was needed to ensure this shell script does not exit at this line accidentally when shell is invoked with `"-e"` flag.

| equation                     | condition to return logical true   |
|------------------------------|--|
| <code>-e file</code>         | <i>file</i> exists   |
| <code>-d file</code>         | <i>file</i> exists and is a directory  |
| <code>-f file</code>         | <i>file</i> exists and is a regular file                                       |
| <code>-w file</code>         | <i>file</i> exists and is writable   |
| <code>-x file</code>         | <i>file</i> exists and is executable   |
| <code>file1 -nt file2</code> | <i>file1</i> is newer than <i>file2</i> (modification)                         |
| <code>file1 -ot file2</code> | <i>file1</i> is older than <i>file2</i> (modification)                         |
| <code>file1 -ef file2</code> | <i>file1</i> and <i>file2</i> are on the same device and the same inode number |

Table 12.5: List of file comparison operators in the conditional expression

**Arithmetic** integer comparison operators in the conditional expression are `"-eq"`, `"-ne"`, `"-lt"`, `"-le"`, `"-gt"`, and `"-ge"`.

### 12.1.4 Shell loops

There are several loop idioms to use in POSIX shell.

- `"for x in foo1 foo2 ... ; do command ; done"` loops by assigning items from the list `"foo1 foo2 ..."` to variable `"x"` and executing `"command"`.
-

| equation                    | condition to return logical true                        |
|-----------------------------|---|
| <code>-z str</code>         | the length of <i>str</i> is zero                        |
| <code>-n str</code>         | the length of <i>str</i> is non-zero                    |
| <code>str1 = str2</code>    | <i>str1</i> and <i>str2</i> are equal                   |
| <code>str1 != str2</code>   | <i>str1</i> and <i>str2</i> are not equal               |
| <code>str1 &lt; str2</code> | <i>str1</i> sorts before <i>str2</i> (locale dependent) |
| <code>str1 &gt; str2</code> | <i>str1</i> sorts after <i>str2</i> (locale dependent)  |

Table 12.6: List of string comparison operators in the conditional expression

- "while condition ; do command ; done" repeats "command" while "condition" is true.
- "until condition ; do command ; done" repeats "command" while "condition" is not true.
- "break" enables to exit from the loop.
- "continue" enables to resume the next iteration of the loop.

**Tip**

The C-language like numeric iteration can be realized by using `seq(1)` as the "foo1 foo2 ..." generator.

**Tip**

See Section [9.4.9](#).

### 12.1.5 Shell environment variables

Some popular environment variables for the normal shell command prompt may not be available under the execution environment of your script.

- For "\$USER", use "\$(id -un)"
- For "\$UID", use "\$(id -u)"
- For "\$HOME", use "\$(getent passwd "\$(id -u)" | cut -d ":" -f 6)" (this works also on Section [4.5.2](#))

### 12.1.6 The shell command-line processing sequence

The shell processes a script roughly as the following sequence.

- The shell reads a line.
- The shell groups a part of the line as **one token** if it is within "\"" or "'".
- The shell splits other part of a line into **tokens** by the following.
  - Whitespaces: *space tab newline*
  - Metacharacters: `< > | ; & ( )`
- The shell checks the **reserved word** for each token to adjust its behavior if not within "\"" or "'".
- **reserved word**: `if then elif else fi for in while unless do done case esac`
- The shell expands **alias** if not within "\"" or "'".

- The shell expands **tilde** if not within `"..."` or `'...'`.
  - `"~"` → current user's home directory
  - `"~user"` → *user*'s home directory
- The shell expands **parameter** to its value if not within `'...'`.
  - **parameter**: `"$PARAMETER"` or `"${PARAMETER}"`
- The shell expands **command substitution** if not within `'...'`.
  - `"$( command )"` → the output of `"command"`
  - `"` command `"` → the output of `"command"`
- The shell expands **pathname glob** to matching file names if not within `"..."` or `'...'`.
  - `*` → any characters
  - `?` → one character
  - `[...]` → any one of the characters in `"..."`
- The shell looks up **command** from the following and execute it.
  - **function** definition
  - **builtin** command
  - **executable file** in `"$PATH"`
- The shell goes to the next line and repeats this process again from the top of this sequence.

Single quotes within double quotes have no effect.

Executing `"set -x"` in the shell or invoking the shell with `"-x"` option make the shell to print all of commands executed. This is quite handy for debugging.

### 12.1.7 Utility programs for shell script

In order to make your shell program as portable as possible across Debian systems, it is a good idea to limit utility programs to ones provided by **essential** packages.

- `"aptitude search ~E"` lists **essential** packages.
- `"dpkg -L package_name |grep '/man/man.*/'"` lists manpages for commands offered by *package\_name* package.

---

#### Tip

Although `moreutils` may not exist outside of Debian, it offers interesting small programs. Most notable one is `sponge(8)` which is quite useful when you wish to overwrite original file.

---

See Section [1.6](#) for examples.

| package                       | popcon                        | size                  | description                                 |
|-------------------------------|-------------------------------|-----------------------|---|
| <a href="#">dash</a>          | <a href="#">V:928, I:998</a>  | <a href="#">207</a>   | small and fast POSIX-compliant shell for sh |
| <a href="#">coreutils</a>     | <a href="#">V:911, I:1000</a> | <a href="#">17994</a> | GNU core utilities                          |
| <a href="#">grep</a>          | <a href="#">V:784, I:1000</a> | <a href="#">1297</a>  | GNU grep, egrep and fgrep                   |
| <a href="#">sed</a>           | <a href="#">V:753, I:1000</a> | <a href="#">987</a>   | GNU sed                                     |
| <a href="#">mawk</a>          | <a href="#">V:485, I:998</a>  | <a href="#">295</a>   | small and fast awk                          |
| <a href="#">debianutils</a>   | <a href="#">V:935, I:996</a>  | <a href="#">225</a>   | miscellaneous utilities specific to Debian  |
| <a href="#">bsdutils</a>      | <a href="#">V:444, I:999</a>  | <a href="#">334</a>   | basic utilities from 4.4BSD-Lite            |
| <a href="#">bsdextrautils</a> | <a href="#">V:753, I:859</a>  | <a href="#">378</a>   | extra utilities from 4.4BSD-Lite            |
| <a href="#">moreutils</a>     | <a href="#">V:17, I:39</a>    | <a href="#">232</a>   | additional Unix utilities                   |

Table 12.7: List of packages containing small utility programs for shell scripts

| package                                   | popcon                         | size                 | documentation  |
|---|--------------------------------|----------------------|--|
| <a href="#">dash</a>                      | <a href="#">V:928, I:998</a>   | <a href="#">207</a>  | <a href="#">sh</a> : small and fast POSIX-compliant shell for sh                     |
| <a href="#">bash</a>                      | <a href="#">V:888, I:999</a>   | <a href="#">7276</a> | <a href="#">sh</a> : "info bash" provided by bash-doc                                |
| <a href="#">mawk</a>                      | <a href="#">V:485, I:998</a>   | <a href="#">295</a>  | <a href="#">AWK</a> : small and fast awk   |
| <a href="#">gawk</a>                      | <a href="#">V:252, I:303</a>   | <a href="#">3289</a> | <a href="#">AWK</a> : "info gawk" provided by gawk-doc                               |
| <a href="#">perl</a>                      | <a href="#">V:668, I:992</a>   | <a href="#">838</a>  | <a href="#">Perl</a> : perl(1) and html pages provided by perl-doc and perl-doc-html |
| <a href="#">libterm-readline-gnu-perl</a> | <a href="#">V:2, I:28</a>      | <a href="#">439</a>  | Perl extension for the GNU ReadLine/History Library: perlsh(1)                       |
| <a href="#">libreply-perl</a>             | <a href="#">V:0.00, I:0.09</a> | <a href="#">171</a>  | REPL for Perl: reply(1)  |
| <a href="#">libdevel-repl-perl</a>        | <a href="#">V:0.03, I:0.55</a> | <a href="#">237</a>  | REPL for Perl: repl(1)   |
| <a href="#">python3</a>                   | <a href="#">V:721, I:973</a>   | <a href="#">81</a>   | <a href="#">Python</a> : python3(1) and html pages provided by python3-doc           |
| <a href="#">tcl</a>                       | <a href="#">V:23, I:178</a>    | <a href="#">20</a>   | <a href="#">Tcl</a> : tcl(3) and detail manual pages provided by tcl-doc             |
| <a href="#">tk</a>                        | <a href="#">V:18, I:172</a>    | <a href="#">20</a>   | <a href="#">Tk</a> : tk(3) and detail manual pages provided by tk-doc                |
| <a href="#">ruby</a>                      | <a href="#">V:71, I:160</a>    | <a href="#">32</a>   | <a href="#">Ruby</a> : ruby(1), erb(1), irb(1), rdoc(1), ri(1)                       |

Table 12.8: List of interpreter related packages

## 12.2 Scripting in interpreted languages

When you wish to automate a task on Debian, you should script it with an interpreted language first. The guide line for the choice of the interpreted language is:

- Use `dash`, if the task is a simple one which combines CLI programs with a shell program.
- Use `python3`, if the task isn't a simple one and you are writing it from scratch.
- Use `perl`, `tcsh`, `ruby`, ... if there is an existing code using one of these languages on Debian which needs to be touched up to do the task.

If the resulting code is too slow, you can rewrite only the critical portion for the execution speed in a compiled language and call it from the interpreted language.

### 12.2.1 Debugging interpreted language codes

Most interpreters offer basic syntax check and code tracing functionalities.

- “**dash -n** *script.sh*” - Syntax check of a Shell script
- “**dash -x** *script.sh*” - Trace a Shell script
- “**python -m py\_compile** *script.py*” - Syntax check of a Python script
- “**python -mtrace --trace** *script.py*” - Trace a Python script
- “**perl -I ../libpath -c** *script.pl*” - Syntax check of a Perl script
- “**perl -d:Trace** *script.pl*” - Trace a Perl script

For testing code for `dash`, try Section 9.1.4 which accommodates bash-like interactive environment.

For testing code for `perl`, try REPL environment for Perl which accommodates Python-like **REPL (=READ + EVAL + PRINT + LOOP)** environment for `Perl`.

### 12.2.2 GUI program with the shell script

The shell script can be improved to create an attractive GUI program. The trick is to use one of so-called dialog programs instead of dull interaction using `echo` and `read` commands.

| package                   | popcon         | size  | description  |
|---------------------------|----------------|-------|--|
| <a href="#">x11-utils</a> | V:226, I:555   | 651   | <code>xmessage(1)</code> : display a message or query in a window (X)                            |
| <a href="#">whiptail</a>  | V:308, I:997   | 61    | displays user-friendly dialog boxes from shell scripts (newt)                                    |
| <a href="#">dialog</a>    | V:8, I:80      | 520   | displays user-friendly dialog boxes from shell scripts (ncurses)                                 |
| <a href="#">zenity</a>    | V:77, I:343    | 193   | display graphical dialog boxes from shell scripts (GTK)  |
| <a href="#">ssft</a>      | V:0.01, I:0.15 | 75    | Shell Scripts Frontend Tool (wrapper for zenity, kdialog, and dialog with <code>gettext</code> ) |
| <a href="#">gettext</a>   | V:51, I:219    | 20468 | “ <code>/usr/bin/gettext.sh</code> ”: translate message  |

Table 12.9: List of dialog programs

Here is an example of GUI program to demonstrate how easy it is just with a shell script.

This script uses `zenity` to select a file (default `/etc/motd`) and display it.

GUI launcher for this script can be created following Section 9.4.10.

```
#!/bin/sh -e
# Copyright (C) 2021 Osamu Aoki <osamu@debian.org>, Public Domain
# vim:set sw=2 sts=2 et:
DATA_FILE=$(zenity --file-selection --filename="/etc/motd" --title="Select a file to check ↵
") || \
( echo "E: File selection error" >&2 ; exit 1 )
# Check size of archive
if ( file -ib "$DATA_FILE" | grep -qe '^text/' ) ; then
    zenity --info --title="Check file: $DATA_FILE" --width 640 --height 400 \
        --text="$(head -n 20 "$DATA_FILE")"
else
    zenity --info --title="Check file: $DATA_FILE" --width 640 --height 400 \
        --text="The data is MIME=$(file -ib "$DATA_FILE")"
fi
```

This kind of approach to GUI program with the shell script is useful only for simple choice cases. If you are to write any program with complexities, please consider writing it on more capable platform.

### 12.2.3 Custom actions for GUI filer

GUI filer programs can be extended to perform some popular actions on selected files using additional extension packages. They can also made to perform very specific custom actions by adding your specific scripts.

- For GNOME, see [NautilusScriptsHowto](#).
- For KDE, see [Creating Dolphin Service Menus](#).
- For Xfce, see [Thunar - Custom Actions](#) and <https://help.ubuntu.com/community/ThunarCustomActions>.
- For LXDE, see [Custom Actions](#).

### 12.2.4 Perl short script madness

In order to process data, sh needs to spawn sub-process running cut, grep, sed, etc., and is slow. On the other hand, perl has internal capabilities to process data, and is fast. So many system maintenance scripts on Debian use perl.

Let's think following one-liner AWK script snippet and its equivalents in Perl.

```
awk '($2=="1957") { print $3 }' |
```

This is equivalent to any one of the following lines.

```
perl -ne '@f=split; if ($f[1] eq "1957") { print "$f[2]\n"}' |
```

```
perl -ne 'if ((@f=split)[1] eq "1957") { print "$f[2]\n"}' |
```

```
perl -ne '@f=split; print $f[2] if ( $f[1]==1957 )' |
```

```
perl -lane 'print $F[2] if $F[1] eq "1957"' |
```

```
perl -lane 'print$F[2]if$F[1]eq+1957' |
```

The last one is a riddle. It took advantage of following Perl features.

- The whitespace is optional.

- The automatic conversion exists from number to the string.
- Perl execution tricks via command line options: `perlrun(1)`
- Perl special variables: `perlvar(1)`

This flexibility is the strength of Perl. At the same time, this allows us to create cryptic and tangled codes. So be careful.

## 12.3 Coding in compiled languages

| package                          | popcon                       | size                  | description  |
|----------------------------------|------------------------------|-----------------------|--|
| <a href="#">gcc</a>              | <a href="#">V:158, I:565</a> | <a href="#">36</a>    | GNU C compiler   |
| <a href="#">libc6-dev</a>        | <a href="#">V:268, I:584</a> | <a href="#">12676</a> | GNU C Library: Development Libraries and Header Files          |
| <a href="#">g++</a>              | <a href="#">V:59, I:531</a>  | <a href="#">13</a>    | GNU C++ compiler   |
| <a href="#">libstdc++-15-dev</a> | <a href="#">V:5, I:23</a>    | <a href="#">25228</a> | GNU Standard C++ Library v3 (development files)                |
| <a href="#">cpp</a>              | <a href="#">V:338, I:721</a> | <a href="#">18</a>    | GNU C preprocessor   |
| <a href="#">gettext</a>          | <a href="#">V:51, I:219</a>  | <a href="#">20468</a> | GNU Internationalization utilities                             |
| <a href="#">glade</a>            | <a href="#">V:0.2, I:2.8</a> | <a href="#">1613</a>  | GTK User Interface Builder                                     |
| <a href="#">valac</a>            | <a href="#">V:0.2, I:3.0</a> | <a href="#">533</a>   | C# like language for the GObject system                        |
| <a href="#">flex</a>             | <a href="#">V:6, I:68</a>    | <a href="#">1247</a>  | LEX-compatible <a href="#">fast lexical analyzer generator</a> |
| <a href="#">bison</a>            | <a href="#">V:7, I:72</a>    | <a href="#">3122</a>  | YACC-compatible <a href="#">parser generator</a>               |
| <a href="#">susv2</a>            | <a href="#">I:0.03</a>       | <a href="#">16</a>    | fetch " <a href="#">The Single UNIX Specifications v2</a> "    |
| <a href="#">susv3</a>            | <a href="#">I:0.05</a>       | <a href="#">16</a>    | fetch " <a href="#">The Single UNIX Specifications v3</a> "    |
| <a href="#">susv4</a>            | <a href="#">I:0.04</a>       | <a href="#">16</a>    | fetch " <a href="#">The Single UNIX Specifications v4</a> "    |
| <a href="#">golang</a>           | <a href="#">I:21</a>         | <a href="#">12</a>    | Go programming language compiler                               |
| <a href="#">rustc</a>            | <a href="#">V:5, I:19</a>    | <a href="#">13061</a> | Rust systems programming language                              |
| <a href="#">gfortran</a>         | <a href="#">V:5, I:50</a>    | <a href="#">15</a>    | GNU Fortran 95 compiler  |
| <a href="#">fpc</a>              | <a href="#">I:2.3</a>        | <a href="#">101</a>   | Free Pascal  |

Table 12.10: List of compiler related packages

Here, Section [12.3.3](#) and Section [12.3.4](#) are included to indicate how compiler-like program can be written in C language by compiling higher level description into C language.

### 12.3.1 C

You can set up proper environment to compile programs written in the [C programming language](#) by the following.

```
# apt-get install glibc-doc manpages-dev libc6-dev gcc build-essential
```

The `libc6-dev` package, i.e., GNU C Library, provides [C standard library](#) which is collection of header files and library routines used by the C programming language.

See references for C as the following.

- "info libc" (C library function reference)
- `gcc(1)` and "info gcc"
- `each_C_library_function_name(3)`
- Kernighan & Ritchie, "The C Programming Language", 2nd edition (Prentice Hall)



12.3.2 Simple C program (gcc)

A simple example "example.c" can be compiled with a library "libm" into an executable "run\_example" by the following.

```
$ cat > example.c << EOF
#include <stdio.h>
#include <math.h>
#include <string.h>

int main(int argc, char **argv, char **envp){
    double x;
    char y[11];
    x=sqrt(argc+7.5);
    strncpy(y, argv[0], 10); /* prevent buffer overflow */
    y[10] = '\0'; /* fill to make sure string ends with '\0' */
    printf("%5i, %5.3f, %10s, %10s\n", argc, x, y, argv[1]);
    return 0;
}
EOF
$ gcc -Wall -g -o run_example example.c -lm
$ ./run_example
    1, 2.915, ./run_exam,      (null)
$ ./run_example 1234567890qwerty
    2, 3.082, ./run_exam, 1234567890qwerty
```

Here, "- lm" is needed to link library "/usr/lib/libm.so" from the libc6 package for sqrt(3). The actual library is in "/lib/" with filename "libm.so.6", which is a symlink to "libm-2.7.so".

Look at the last parameter in the output text. There are more than 10 characters even though "%10s" is specified. The use of pointer memory operation functions without boundary checks, such as sprintf(3) and strcpy(3), is deprecated to prevent buffer overflow exploits that leverage the above overrun effects. Instead, use snprintf(3) and strncpy(3).

12.3.3 Flex — a better Lex

Flex is a [Lex-compatible fast lexical analyzer](#) generator. Tutorial for flex(1) can be found in "info flex". Many simple examples can be found under "/usr/share/doc/flex/examples/". [1](#)

12.3.4 Bison — a better Yacc

Several packages provide a [Yacc-compatible lookahead LR parser](#) or [LALR parser](#) generator in Debian.

| package                | popcon         | size | description                                  |
|------------------------|----------------|------|--|
| <a href="#">bison</a>  | V:7, I:72      | 3122 | <a href="#">GNU LALR parser generator</a>    |
| <a href="#">byacc</a>  | V:0.2, I:3.1   | 263  | Berkeley LALR parser generator               |
| <a href="#">btyacc</a> | V:0.01, I:0.06 | 247  | backtracking parser generator based on byacc |

Table 12.11: List of Yacc-compatible LALR parser generators

Tutorial for bison(1) can be found in "info bison".

<sup>1</sup>Some [tweaks](#) may be required to get them work under the current system.

You need to provide your own "main()" and "yyerror()". "main()" calls "yyparse()" which calls "yylex()", usually created with Flex.

Here is an example to create a simple terminal calculator program.

Let's create example.y:

```
/* calculator source for bison */
%{
#include <stdio.h>
extern int yylex(void);
extern int yyerror(char *);
%}

/* declare tokens */
%token NUMBER
%token OP_ADD OP_SUB OP_MUL OP_RGT OP_LFT OP_EQU

%%

calc:
| calc exp OP_EQU { printf("Y: RESULT = %d\n", $2); }
;

exp: factor
| exp OP_ADD factor { $$ = $1 + $3; }
| exp OP_SUB factor { $$ = $1 - $3; }
;

factor: term
| factor OP_MUL term { $$ = $1 * $3; }
;

term: NUMBER
| OP_LFT exp OP_RGT { $$ = $2; }
;
%%

int main(int argc, char **argv)
{
    yyparse();
}

int yyerror(char *s)
{
    fprintf(stderr, "error: '%s'\n", s);
}
```

Let's create, example.l:

```
/* calculator source for flex */
%{
#include "example.tab.h"
%}

%%
[0-9]+ { printf("L: NUMBER = %s\n", yytext); yylval = atoi(yytext); return NUMBER; }
"+" { printf("L: OP_ADD\n"); return OP_ADD; }
"-" { printf("L: OP_SUB\n"); return OP_SUB; }
"*" { printf("L: OP_MUL\n"); return OP_MUL; }
"(" { printf("L: OP_LFT\n"); return OP_LFT; }
")" { printf("L: OP_RGT\n"); return OP_RGT; }
"=" { printf("L: OP_EQU\n"); return OP_EQU; }
```

```
"exit" { printf("L: exit\n"); return YYEOF; } /* YYEOF = 0 */
.      { /* ignore all other */ }
%%
```

Then execute as follows from the shell prompt to try this:

```
$ bison -d example.y
$ flex example.l
$ gcc -lfl example.tab.c lex.yy.c -o example
$ ./example
1 + 2 * ( 3 + 1 ) =
L: NUMBER = 1
L: OP_ADD
L: NUMBER = 2
L: OP_MUL
L: OP_LFT
L: NUMBER = 3
L: OP_ADD
L: NUMBER = 1
L: OP_RGT
L: OP_EQU
Y: RESULT = 9

exit
L: exit
```

## 12.4 Static code analysis tools

[Lint](#) like tools can help automatic [static code analysis](#).

[Indent](#) like tools can help human code reviews by reformatting source codes consistently.

[Ctags](#) like tools can help human code reviews by generating an index (or tag) file of names found in source codes.

---

### Tip

Configuring your favorite editor (emacs or vim) to use asynchronous lint engine plugins helps your code writing. These plugins are getting very powerful by taking advantage of [Language Server Protocol](#). Since they are moving fast, using their upstream code instead of Debian package may be a good option.

---

## 12.5 Debug

Debug is important part of programming activities. Knowing how to debug programs makes you a good Debian user who can produce meaningful bug reports.

### 12.5.1 Basic gdb execution

Primary [debugger](#) on Debian is `gdb(1)` which enables you to inspect a program while it executes.

Let's install `gdb` and related programs by the following.

```
# apt-get install gdb gdb-doc build-essential devscripts
```

Good tutorial of `gdb` can be found:

---

| package                         | popcon                         | size                  | description   |
|---------------------------------|--------------------------------|-----------------------|---|
| <a href="#">vim-ale</a>         | <a href="#">I:0.78</a>         | <a href="#">2833</a>  | Asynchronous Lint Engine for Vim 8 and NeoVim                       |
| <a href="#">vim-syntastic</a>   | <a href="#">I:2.0</a>          | <a href="#">1379</a>  | Syntax checking hacks for vim                                       |
| <a href="#">elpa-flycheck</a>   | <a href="#">V:0.1, I:1.6</a>   | <a href="#">815</a>   | modern on-the-fly syntax checking for Emacs                         |
| <a href="#">elpa-relint</a>     | <a href="#">V:0.01, I:0.05</a> | <a href="#">150</a>   | Emacs Lisp regexp mistake finder                                    |
| <a href="#">cppcheck-gui</a>    | <a href="#">V:0.11, I:0.99</a> | <a href="#">7722</a>  | tool for static C/C++ code analysis (GUI)                           |
| <a href="#">shellcheck</a>      | <a href="#">V:3, I:16</a>      | <a href="#">22860</a> | lint tool for shell scripts   |
| <a href="#">pyflakes3</a>       | <a href="#">V:1, I:14</a>      | <a href="#">20</a>    | passive checker of Python 3 programs                                |
| <a href="#">pylint</a>          | <a href="#">V:3, I:20</a>      | <a href="#">2089</a>  | Python code static checker  |
| <a href="#">perl</a>            | <a href="#">V:668, I:992</a>   | <a href="#">838</a>   | interpreter with internal static code checker: B::Lint(3perl)       |
| <a href="#">rubocop</a>         | <a href="#">V:0.07, I:1.00</a> | <a href="#">4157</a>  | Ruby static code analyzer   |
| <a href="#">clang-tidy</a>      | <a href="#">V:2, I:11</a>      | <a href="#">21</a>    | clang-based C++ linter tool   |
| <a href="#">splint</a>          | <a href="#">V:0.06, I:0.94</a> | <a href="#">2325</a>  | tool for statically checking C programs for bugs                    |
| <a href="#">flawfinder</a>      | <a href="#">V:0.07, I:0.44</a> | <a href="#">205</a>   | tool to examine C/C++ source code and looks for security weaknesses |
| <a href="#">black</a>           | <a href="#">V:3, I:16</a>      | <a href="#">10057</a> | uncompromising Python code formatter                                |
| <a href="#">perltidy</a>        | <a href="#">V:0.4, I:3.0</a>   | <a href="#">3086</a>  | Perl script indenter and reformatter                                |
| <a href="#">indent</a>          | <a href="#">V:0.3, I:5.1</a>   | <a href="#">438</a>   | C language source code formatting program                           |
| <a href="#">astyle</a>          | <a href="#">V:0.2, I:2.5</a>   | <a href="#">770</a>   | Source code indenter for C, C++, Objective-C, C#, and Java          |
| <a href="#">bcpp</a>            | <a href="#">V:0.02, I:0.26</a> | <a href="#">114</a>   | C(++) beautifier  |
| <a href="#">xmlindent</a>       | <a href="#">V:0.08, I:0.78</a> | <a href="#">52</a>    | XML stream reformatter  |
| <a href="#">global</a>          | <a href="#">V:0.2, I:1.6</a>   | <a href="#">1923</a>  | Source code search and browse tools                                 |
| <a href="#">exuberant-ctags</a> | <a href="#">V:2, I:13</a>      | <a href="#">341</a>   | build tag file indexes of source code definitions                   |
| <a href="#">universal-ctags</a> | <a href="#">V:1, I:12</a>      | <a href="#">4238</a>  | build tag file indexes of source code definitions                   |

Table 12.12: List of tools for static code analysis

| package             | popcon                       | size                  | documentation                  |
|---------------------|------------------------------|-----------------------|--------------------------------|
| <a href="#">gdb</a> | <a href="#">V:87, I:159</a>  | <a href="#">12456</a> | "info gdb" provided by gdb-doc |
| <a href="#">ddd</a> | <a href="#">V:0.3, I:5.2</a> | <a href="#">4210</a>  | "info ddd" provided by ddd-doc |

Table 12.13: List of debug packages

- “info gdb”
- “Debugging with GDB” in </usr/share/doc/gdb-doc/html/gdb/index.html>
- [“tutorial on the web”](#)

Here is a simple example of using gdb(1) on a “program” compiled with the “-g” option to produce debugging information.

```
$ gdb program
(gdb) b 1           # set break point at line 1
(gdb) run args      # run program with args
(gdb) next          # next line
...
(gdb) step          # step forward
...
(gdb) p parm        # print parm
...
(gdb) p parm=12     # set value to 12
...
(gdb) quit
```

---

**Tip**

Many gdb(1) commands can be abbreviated. Tab expansion works as in the shell.

---

## 12.5.2 Debugging the Debian package

Since all installed binaries should be stripped on the Debian system by default, most debugging symbols are removed in the normal package. In order to debug Debian packages with gdb(1), \*-dbgsym packages need to be installed (e.g. coreutils-dbgsym in the case of coreutils). The source packages generate \*-dbgsym packages automatically along with normal binary packages and those debug packages are placed separately in [debian-debug](#) archive. Please refer to [articles on Debian Wiki](#) for more information.

If a package to be debugged does not provide its \*-dbgsym package, you need to install it after rebuilding it by the following.

```
$ mkdir /path/new ; cd /path/new
$ sudo apt-get update
$ sudo apt-get dist-upgrade
$ sudo apt-get install fakeroot devscripts build-essential
$ apt-get source package_name
$ cd package_name*
$ sudo apt-get build-dep ./
```

Fix bugs if needed.

Bump package version to one which does not collide with official Debian versions, e.g. one appended with “+debug1” when recompiling existing package version, or one appended with “~pre1” when compiling unreleased package version by the following.

```
$ dch -i
```

Compile and install packages with debug symbols by the following.

```
$ export DEB_BUILD_OPTIONS="nostrip noopt"
$ debuild
$ cd ..
$ sudo debi package_name*.changes
```

You need to check build scripts of the package and ensure to use “CFLAGS=-g -Wall” for compiling binaries.

---

### 12.5.3 Obtaining backtrace

When you encounter program crash, reporting bug report with cut-and-pasted backtrace information is a good idea. The backtrace can be obtained by `gdb(1)` using one of the following approaches:

- Crash-in-GDB approach:
  - Run the program from GDB.
  - Crash the program.
  - Type `"bt"` at the GDB prompt.
- Crash-first approach:
  - Update the `"/etc/security/limits.conf"` file to include the following:

```
* soft core unlimited
```

- Type `"ulimit -c unlimited"` to the shell prompt.
- Run the program from this shell prompt.
- Crash the program to produce a [core dump](#) file.
- Load the [core dump](#) file to GDB as `"gdb gdb ./program_binary core"`.
- Type `"bt"` at the GDB prompt.

For infinite loop or frozen keyboard situation, you can force to crash the program by pressing `Ctrl-\` or `Ctrl-C` or executing `"kill -ABRT PID"`. (See Section [9.4.12](#))

#### Tip

Often, you see a backtrace where one or more of the top lines are in `"malloc()"` or `"g_malloc()"`. When this happens, chances are your backtrace isn't very useful. The easiest way to find some useful information is to set the environment variable `"$MALLOCCHECK_"` to a value of 2 (`malloc(3)`). You can do this while running `gdb` by doing the following.

```
$ MALLOCCHECK_=2 gdb hello
```

### 12.5.4 Advanced gdb commands

| command  | description for command objectives   |
|--|--|
| <code>(gdb) thread apply all bt</code>         | get a backtrace for all threads for multi-threaded program                   |
| <code>(gdb) bt full</code>                     | get parameters came on the stack of function calls                           |
| <code>(gdb) thread apply all bt full</code>    | get a backtrace and parameters as the combination of the preceding options   |
| <code>(gdb) thread apply all bt full 10</code> | get a backtrace and parameters for top 10 calls to cut off irrelevant output |
| <code>(gdb) set logging on</code>              | write log of gdb output to a file (the default is <code>"gdb.txt"</code> )   |

Table 12.14: List of advanced gdb commands

### 12.5.5 Check dependency on libraries

Use `ldd(1)` to find out a program's dependency on libraries by the followings.

```
$ ldd /usr/bin/ls
    librt.so.1 => /lib/librt.so.1 (0x4001e000)
    libc.so.6 => /lib/libc.so.6 (0x40030000)
    libpthread.so.0 => /lib/libpthread.so.0 (0x40153000)
    /lib/ld-linux.so.2 => /lib/ld-linux.so.2 (0x40000000)
```

For `ls(1)` to work in a ``chroot`ed` environment, the above libraries must be available in your ``chroot`ed` environment. See Section [9.4.6](#).

### 12.5.6 Dynamic call tracing tools

There are several dynamic call tracing tools available in Debian. See Section [9.4](#).

### 12.5.7 Debugging X Errors

If a GNOME program `preview1` has received an X error, you should see a message as follows.

```
The program 'preview1' received an X Window System error.
```

If this is the case, you can try running the program with `"--sync"`, and break on the `"gdk_x_error"` function in order to obtain a backtrace.

### 12.5.8 Memory leak detection tools

There are several memory leak detection tools available in Debian.

| package                        | popcon         | size                  | description  |
|--------------------------------|----------------|-----------------------|--|
| <a href="#">libc6-dev</a>      | V:268, I:584   | <a href="#">12676</a> | mttrace(1): malloc debugging functionality in glibc                    |
| <a href="#">valgrind</a>       | V:5, I:33      | <a href="#">87847</a> | memory debugger and profiler   |
| <a href="#">electric-fence</a> | V:0.2, I:2.4   | <a href="#">69</a>    | ma lloc(3) debugger  |
| <a href="#">libdmalloc5</a>    | V:0.01, I:0.66 | <a href="#">373</a>   | debug memory allocation library  |
| <a href="#">duma</a>           | V:0.01, I:0.06 | <a href="#">297</a>   | library to detect buffer overruns and under-runs in C and C++ programs |
| <a href="#">leaktracer</a>     | I:0.39         | <a href="#">56</a>    | memory-leak tracer for C++ programs                                    |

Table 12.15: List of memory leak detection tools

### 12.5.9 Disassemble binary

You can disassemble binary code with `objdump(1)` by the following.

```
$ objdump -m i386 -b binary -D /usr/lib/grub/x86_64-pc/stage1
```

---

#### Note

`gdb(1)` may be used to disassemble code interactively.

---

## 12.6 Build tools

| package                     | popcon                       | size                  | documentation   |
|-----------------------------|------------------------------|-----------------------|---|
| <a href="#">make</a>        | <a href="#">V:152, I:567</a> | <a href="#">1762</a>  | "info make" provided by make-doc                        |
| <a href="#">autoconf</a>    | <a href="#">V:28, I:199</a>  | <a href="#">2244</a>  | "info autoconf" provided by autoconf-doc                |
| <a href="#">automake</a>    | <a href="#">V:27, I:198</a>  | <a href="#">1932</a>  | "info automake" provided by automake1.10-doc            |
| <a href="#">libtool</a>     | <a href="#">V:23, I:182</a>  | <a href="#">1245</a>  | "info libtool" provided by libtool-doc                  |
| <a href="#">cmake</a>       | <a href="#">V:19, I:122</a>  | <a href="#">59735</a> | cmake(1) cross-platform, open-source make system        |
| <a href="#">ninja-build</a> | <a href="#">V:8, I:53</a>    | <a href="#">456</a>   | ninja(1) small build system closest in spirit to Make   |
| <a href="#">meson</a>       | <a href="#">V:6, I:28</a>    | <a href="#">4277</a>  | meson(1) high productivity build system on top of ninja |
| <a href="#">xutils-dev</a>  | <a href="#">V:0.5, I:7.0</a> | <a href="#">1495</a>  | imake(1), xmkmf(1), etc.                                |

Table 12.16: List of build tool packages

### 12.6.1 Make

**Make** is a utility to maintain groups of programs. Upon execution of `make(1)`, make read the rule file, "Makefile", and updates a target if it depends on prerequisite files that have been modified since the target was last modified, or if the target does not exist. The execution of these updates may occur concurrently.

The rule file syntax is the following.

```
target: [ prerequisites ... ]
[TAB] command1
[TAB] -command2 # ignore errors
[TAB] @command3 # suppress echoing
```

Here "[TAB]" is a TAB code. Each line is interpreted by the shell after make variable substitution. Use "\" at the end of a line to continue the script. Use "\$\$" to enter "\$" for environment values for a shell script.

Implicit rules for the target and prerequisites can be written, for example, by the following.

```
%.o: %.c header.h
```

Here, the target contains the character "%" (exactly one of them). The "%" can match any nonempty substring in the actual target filenames. The prerequisites likewise use "%" to show how their names relate to the actual target name.

| automatic variable | value                                  |
|--------------------|--|
| \$@                | target                                 |
| \$<                | first prerequisite                     |
| \$?                | all newer prerequisites                |
| \$^                | all prerequisites                      |
| \$*                | "%" matched stem in the target pattern |

Table 12.17: List of make automatic variables

| variable expansion | description         |
|--------------------|---------------------|
| foo1 := bar        | one-time expansion  |
| foo2 = bar         | recursive expansion |
| foo3 += bar        | append              |

Table 12.18: List of make variable expansions

Run "`make -p -f/dev/null`" to see automatic internal rules.



## 12.6.2 Autotools

**Autotools** is a suite of programming tools designed to assist in making source code packages portable to many **Unix-like** systems.

- **Autoconf** is a tool to produce a shell script "configure" from "configure.ac".
  - "configure" is used later to produce "Makefile" from "Makefile.in" template.
- **Automake** is a tool to produce "Makefile.in" from "Makefile.am".
- **Libtool** is a shell script to address the software portability problem when compiling shared libraries from source code.

### 12.6.2.1 Compile and install a program



#### Warning

Do not overwrite system files with your compiled programs when installing them.

---

Debian does not touch files in "/usr/local/" or "/opt". So if you compile a program from source, install it into "/usr/local/" so it does not interfere with Debian.

```
$ cd src
$ ./configure --prefix=/usr/local
$ make # this compiles program
$ sudo make install # this installs the files in the system
```

### 12.6.2.2 Uninstall program

If you have the original source and if it uses `autoconf(1)/automake(1)` and if you can remember how you configured it, execute as follows to uninstall the program.

```
$ ./configure all-of-the-options-you-gave-it
$ sudo make uninstall
```

Alternatively, if you are absolutely sure that the install process puts files only under "/usr/local/" and there is nothing important there, you can erase all its contents by the following.

```
# find /usr/local -type f -print0 | xargs -0 rm -f
```

If you are not sure where files are installed, you should consider using `checkinstall(8)` from the `checkinstall` package, which provides a clean path for the uninstall. It now supports to create a Debian package with "-D" option.

## 12.6.3 Meson

The software build system has been evolving:

- **Autotools** on the top of **Make** has been the de facto standard for the portable build infrastructure since 1990s. This is extremely slow.
  - **CMake** initially released in 2000 improved speed significantly but was originally built on the top of inherently slow **Make**. (Now **Ninja** can be its backend.)
-

- [Ninja](#) initially released in 2012 is meant to replace Make for the further improved build speed and is designed to have its input files generated by a higher-level build system.
- [Meson](#) initially released in 2013 is the new popular and fast higher-level build system which uses [Ninja](#) as its backend.

See documents found at "[The Meson Build system](#)" and "[The Ninja build system](#)".

## 12.7 Web

Basic interactive dynamic web pages can be made as follows.

- Queries are presented to the browser user using [HTML](#) forms.
- Filling and clicking on the form entries sends one of the following [URL](#) string with encoded parameters from the browser to the web server.
  - "https://www.foo.dom/cgi-bin/program.pl?VAR1=VAL1&VAR2=VAL2&VAR3=VAL3"
  - "https://www.foo.dom/cgi-bin/program.py?VAR1=VAL1&VAR2=VAL2&VAR3=VAL3"
  - "https://www.foo.dom/program.php?VAR1=VAL1&VAR2=VAL2&VAR3=VAL3"
- "%nn" in URL is replaced with a character with hexadecimal nn value.
- The environment variable is set as: "QUERY\_STRING="VAR1=VAL1 VAR2=VAL2 VAR3=VAL3"".
- [CGI](#) program (any one of "program.\*") on the web server executes itself with the environment variable "\$QUERY\_STRING".
- stdout of CGI program is sent to the web browser and is presented as an interactive dynamic web page.

For security reasons it is better not to hand craft new hacks for parsing CGI parameters. There are established modules for them in Perl and Python. [PHP](#) comes with these functionalities. When client data storage is needed, [HTTP cookies](#) are used. When client side data processing is needed, [Javascript](#) is frequently used.

For more, see the [Common Gateway Interface](#), [The Apache Software Foundation](#), and [JavaScript](#).

Searching "CGI tutorial" on Google by typing encoded URL <https://www.google.com/search?hl=en&ie=UTF-8&q=CGI+tutorial> directly to the browser address is a good way to see the CGI script in action on the Google server.

## 12.8 The source code translation

There are programs to convert source codes.

| package                   | popcon                         | size                | keyword      | description   |
|---------------------------|--------------------------------|---------------------|--------------|---|
| <a href="#">perl</a>      | <a href="#">V:668, I:992</a>   | <a href="#">838</a> | AWK → PERL   | convert source codes from AWK to PERL: a2p(1)                 |
| <a href="#">f2c</a>       | <a href="#">V:0.1, I:2.0</a>   | <a href="#">443</a> | FORTTRAN → C | convert source codes from FORTRAN 77 to C/C++: f2c(1)         |
| <a href="#">intel2gas</a> | <a href="#">V:0.03, I:0.19</a> | <a href="#">178</a> | intel → gas  | converter from NASM (Intel format) to the GNU Assembler (GAS) |

Table 12.19: List of source code translation tools

## 12.9 Making Debian package

If you want to make a Debian package, read followings.

- Chapter [2](#) to understand the basic package system
- Section [2.7.13](#) to understand basic porting process
- Section [9.11.4](#) to understand basic chroot techniques
- `debuild(1)`, and `sbuid(1)`
- Section [12.5.2](#) for recompiling for debugging
- [Guide for Debian Maintainers](#) (the `debmake-doc` package)
- [Debian Developer's Reference](#) (the `developers-reference` package)
- [Debian Policy Manual](#) (the `debian-policy` package)

There are packages such as `debmake`, `dh-make`, `dh-make-perl`, etc., which help packaging.

## Appendix A

# Appendix

Here are backgrounds of this document.

### A.1 The Debian maze

The Linux system is a very powerful computing platform for a networked computer. However, learning how to use all its capabilities is not easy. Setting up the LPR printer queue with a non-PostScript printer was a good example of stumble points. (There are no issues anymore since newer installations use the new CUPS system.)

There is a complete, detailed map called the "SOURCE CODE". This is very accurate but very hard to understand. There are also references called HOWTO and mini-HOWTO. They are easier to understand but tend to give too much detail and lose the big picture. I sometimes have a problem finding the right section in a long HOWTO when I need a few commands to invoke.

I hope this "Debian Reference (version 2.140)" (2026-06-25 05:00:57 UTC) provides a good starting direction for people in the Debian maze.

### A.2 Copyright history

The Debian Reference was initiated by me, Osamu Aoki <osamu at debian dot org>, as a personal system administration memo. Many contents came from the knowledge I gained from [the debian-user mailing list](#) and other Debian resources.

Following a suggestion from Josip Rodin, who was very active with the [Debian Documentation Project \(DDP\)](#), "Debian Reference (version 1, 2001-2007)" was created as a part of DDP documents.

After 6 years, I realized that the original "Debian Reference (version 1)" was outdated and started to rewrite many contents. New "Debian Reference (version 2)" is released in 2008.

I have updated "Debian Reference (version 2)" to address new topics (Systemd, Wayland, IMAP, PipeWire, Linux kernel 5.10) and removed outdated topics (SysV init, CVS, Subversion, SSH protocol 1, Linux kernels before 2.5). References to Jessie 8 (2015-2020) release situation or older are mostly removed.

This "Debian Reference (version 2.140)" (2026-06-25 05:00:57 UTC) covers mostly Trixie (=stable) and Forky (=testing) Debian releases.

The tutorial contents can trace its origin and its inspiration in followings.

- "[Linux User's Guide](#)" by Larry Greenfield (December 1996)
  - obsoleted by "Debian Tutorial"

- "Debian Tutorial" by Havoc Pennington. (11 December, 1998)
  - partially written by Oliver Elphick, Ole Tetlie, James Treacy, Craig Sawyer, and Ivan E. Moore II
  - obsolete by "Debian GNU/Linux: Guide to Installation and Usage"
- "[Debian GNU/Linux: Guide to Installation and Usage](#)" by John Goerzen and Ossama Othman (1999)
  - obsolete by "Debian Reference (version 1)"

The package and archive description can trace some of their origin and their inspiration in following.

- "[Debian FAQ](#)" (March 2002 version, when this was maintained by Josip Rodin)

The other contents can trace some of their origin and their inspiration in following.

- "Debian Reference (version 1)" by Osamu Aoki (2001–2007)
  - obsolete by the newer "Debian Reference (version 2)" in 2008.

The previous "Debian Reference (version 1)" was created with many contributors.

- the major contents contribution on network configuration topics by Thomas Hood
- significant contents contribution on X and VCS related topics by Brian Nelson
- the help on the build scripts and many content corrections by Jens Seidel
- extensive proofreading by David Sewell
- many contributions by the translators, contributors, and bug reporters

Many manual pages and info pages on the Debian system as well as upstream web pages and [Wikipedia](#) documents were used as the primary references to write this document. To the extent Osamu Aoki considered within the [fair use](#), many parts of them, especially command definitions, were used as phrase pieces after careful editorial efforts to fit them into the style and the objective of this document.

The gdb debugger description was expanded using [Debian wiki contents on backtrace](#) with consent by Ari Pollak, Loïc Minier, and Dafydd Harries.

Contents of the current "Debian Reference (version 2.140)" (2026-06-25 05:00:57 UTC) are mostly my own work except as mentioned above. These has been updated by the contributors too.

The author, Osamu Aoki, thanks all those who helped make this document possible.

## A.3 Document format

The source of the English original document is currently written in [DocBook](#) XML files. This Docbook XML source are converted to HTML, plain text, PostScript, and PDF. (Some formats may be skipped for distribution.)